
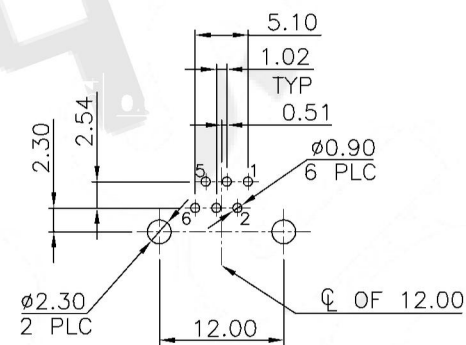

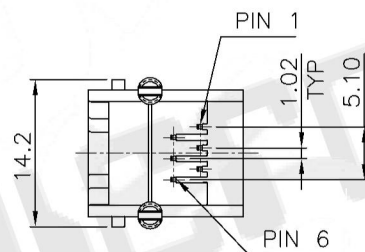



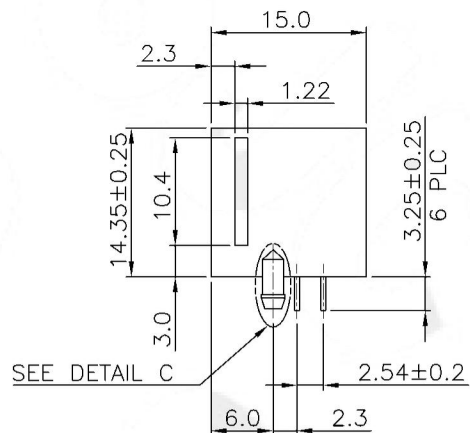


Micro-Ray

RoHS Compliance

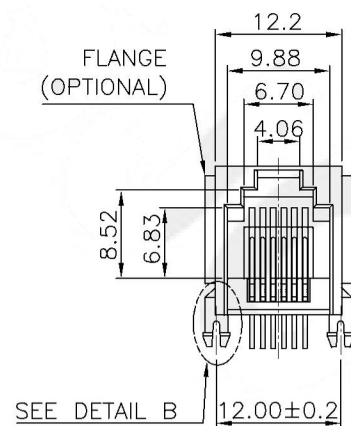

RECOMMENDED PCB LAYOUT

RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.
DO NOT SCALE DRAWING.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
 THIRD ANGLE PROJECTION	0 PLC $\pm -$ 1 PLC ± 0.25 2 PLC ± 0.13 3 PLC ± 0.05 ANGLES $\pm -$

MATERIAL	FINISH
SEE NOTES	SEE NOTES
DWN <i>A. HUANG</i>	DATE MAY-04-2016
CHK <i>M. CHANG</i>	MAY-04-2016
APVD <i>W. J. YANG</i>	MAY-05-2016

Micro-Ray

TITLE	6POSITION, LOW PROFILE, SIDE ENTRY PCB JACK
-------	--

				THIRD ANGLE PROJECTION	3 PLG ANGLES ±0.05 ± -	TITLE 6 POSITION, LOW PROFILE, SIDE ENTRY PCB JACK			
				MATERIAL	FINISH				
				SEE NOTES	SEE NOTES				
				DWN <i>A.HUANG</i>	DATE MAY-04-2016	SIZE	CAUGE CODE		
LTR	DESCRIPTION	DATE	APVD	CHK <i>M.CHANG</i>	MAY-04-2016	A3	—	MR-960601	
REVISIONS				APVD <i>W.J. YANG</i>	MAY-05-2016	WEIGHT	— GRAMS	Ref.	REV 6 SHEET 1