
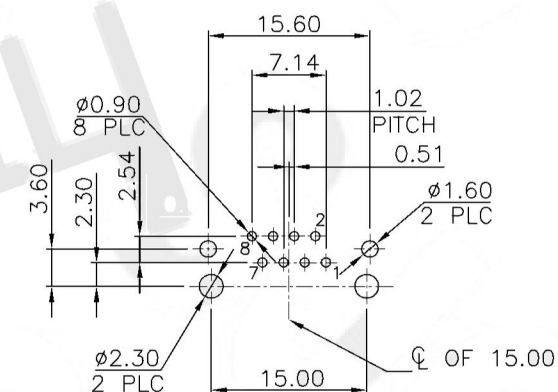
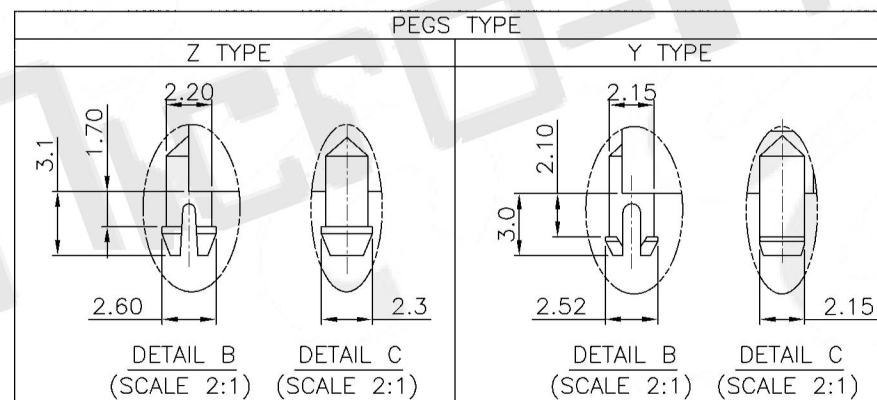
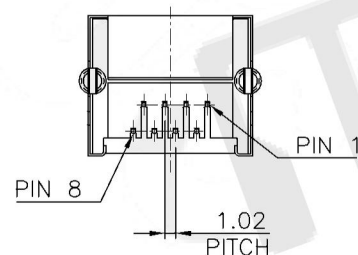

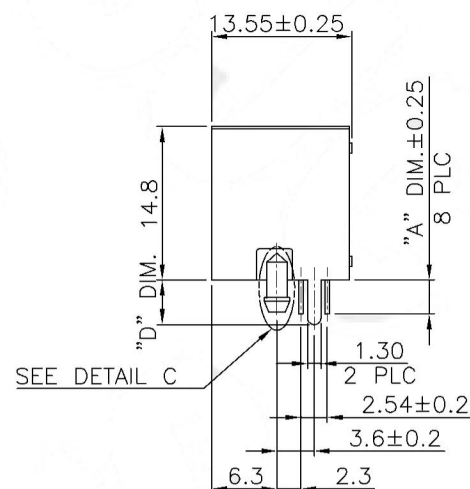


Micro-Ray

RoHS Compliance

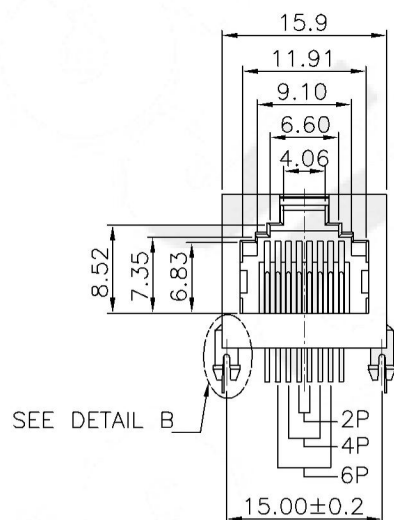


RECOMMENDED PCB LAYOUT

RECOMMENDED PCB THICKNESS: 1.6mm
P/N: 9612-8X1X-SA-H RECOMMENDED PCB THICKNESS: 2.0mm
TOLERANCE: ± 0.05 (TOP VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.
DO NOT SCALE DRAWING.

DIMENSIONS:
MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:



0 PLC	$\pm -$
1 PLC	± 0.25
2 PLC	± 0.13
3 PLC	± 0.05
ANGLES	$\pm -$

	MATERIAL
--	----------

	FINISH
--	--------

SEE NOTES

SEE NOTES

	DWN
--	-----

DATE	
------	--

CHK

	MAY-17-2016
--	-------------

[illegible]

	MAY-17-2016
--	-------------

Micro-Ray

TITLE

RJ45, MINI LOW PROFILE,
WITH SHELL, SIDE ENTRY PCB JACK

SIZE	A3
------	----

CAUGE CODE

MR-961210

	WEIGHT	

- GRAMS Ref.

REV	9
-----	---

SHEET	1
-------	---

LTR	DESCRIPTION	DATE	APV
REVISIONS			