





MR-A0600 Series 0.60mm Pitch Series Wire to Board Connectors

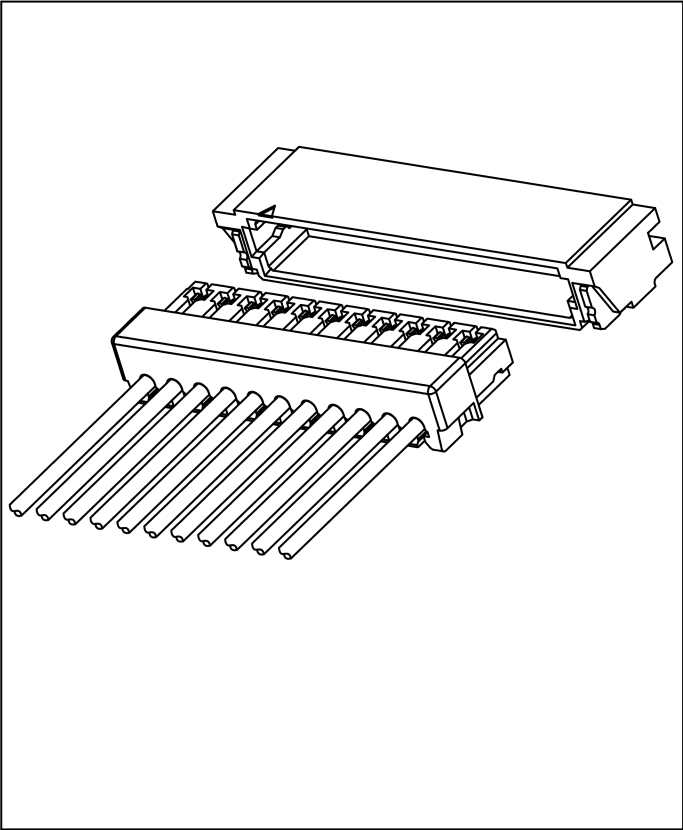

SPECIFICATIONS:






- Voltage Rating: 30V AC/DC
- Current Rating: 0.2A AC/DC
- Withstanding Voltage: 200V AC/Minute
- Temperature Range: -25°C~+85°C
- Insulation Resistance: 100MΩ Min.
- Contact Resistance: 30mΩ Max.
- Applicable Wire Range: AWG#34~36.

Assembly Layout:

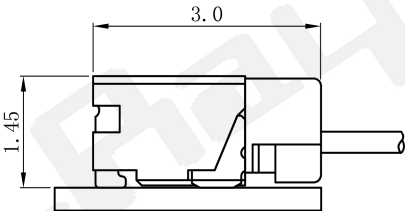

MR-A0600HI-NP-L0BK

0.60mm Pitch Single Row Housing

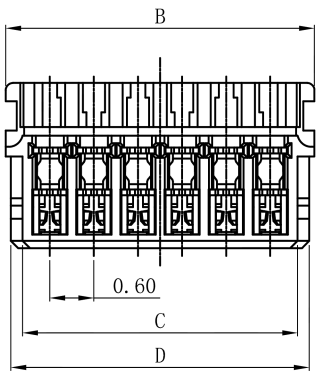

- Reference Information:
- *Material:
 - Terminal: Phosphor Bronze / Gold-plated
 - Housing: LCP UL94V-0, Natural or Black
 - *Mates with MR-A0600 series Wafer





Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
02	0.60	1.80	1.34	1.66
03	1.20	2.40	1.94	2.26
04	1.80	3.00	2.54	2.86
05	2.40	3.60	3.14	3.46
06	3.00	4.20	3.74	4.06
07	3.60	4.80	4.34	4.66
08	4.20	5.40	4.94	5.26
09	4.80	6.00	5.54	5.86
10	5.40	6.60	6.14	6.46
11	6.00	7.20	6.74	7.06
12	6.60	7.80	7.34	7.66
13	7.20	8.40	7.94	8.26
14	7.80	9.00	8.54	8.86
15	8.40	9.60	9.14	9.46
16	9.00	10.20	9.74	10.06



MR-A0600 Series 0.60mm Pitch Series Wire to Board Connectors

MR-A0600WRS-NP-L0NAG 0.60mm Pitch 90° SMT Single Row Wafer

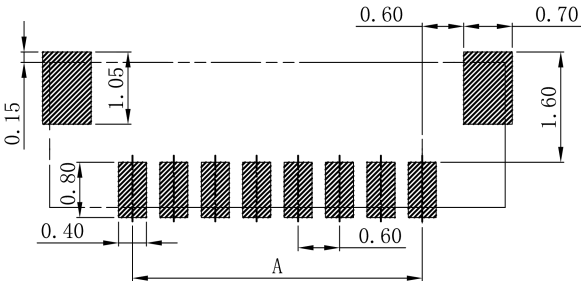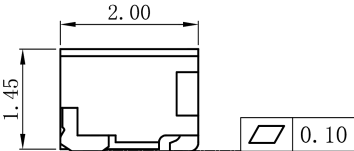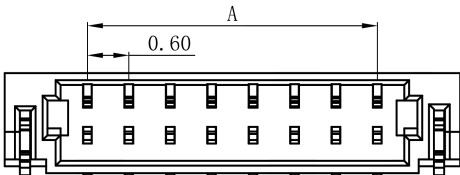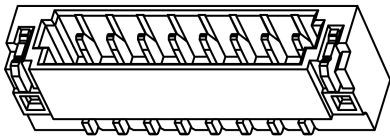

P.C.B LAYOUT

Reference Information:
*Material:
PIN: Phosphor Bronze / Gold-Flash
Shell: Brass / Gold-Flash
Wafer: LCP, UL94V-0
Color: Natural (Beige)
*Mates with MR-A0600 series Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	0.60	3.00
03	1.20	3.60
04	1.80	4.20
05	2.40	4.80
06	3.00	5.40
07	3.60	6.00
08	4.20	6.60
09	4.80	7.20
10	5.40	7.80
11	6.00	8.40
12	6.60	9.00
13	7.20	9.60
14	7.80	10.20
15	8.40	10.80
16	9.00	11.40



TITLE 0.60mm PITCH WIRE-TO-BOARD CONNECTOR			
SIZE A3	DWG NO MR-A0600	REV 0	SHEET 2