





MR-A1500 Series 1.50mm Pitch Series Wire to Board Connectors

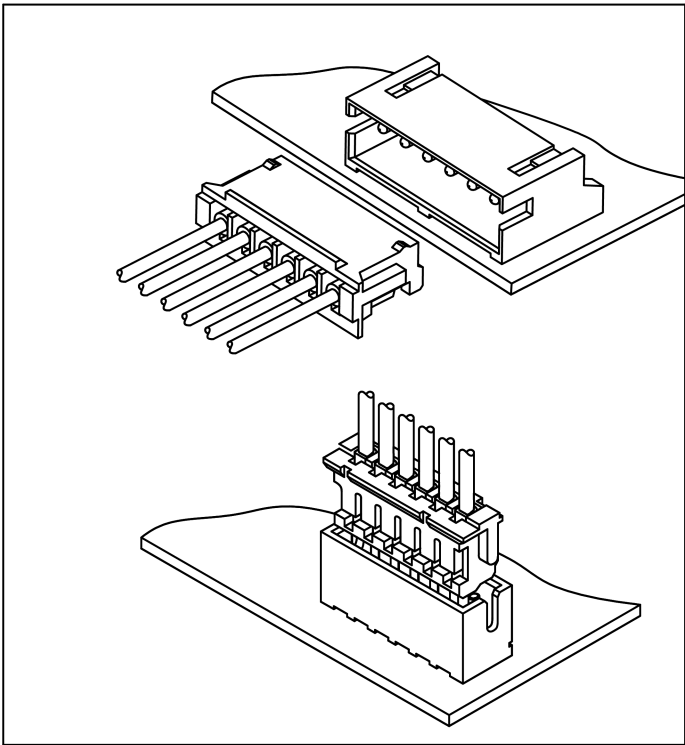




SPECIFICATIONS:

Voltage Rating: 100V AC/DC
Current Rating: 1A AC/DC
Withstanding Voltage: 500V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Applicable Wire Range: AWG#26~32.


Assembly Layout:

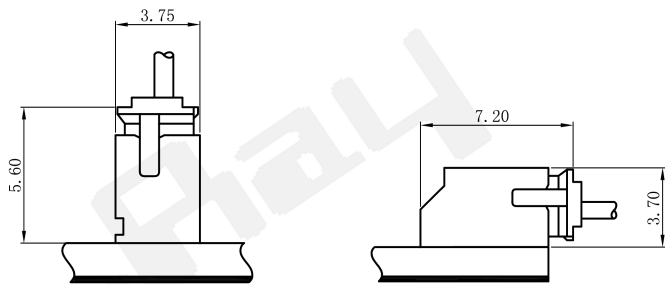

MR-A1500H-NP-N0NA 1.50mm Pitch Single Row Housing

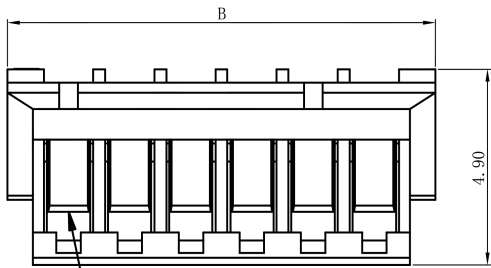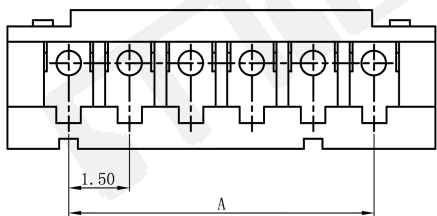

Circuit 1



Reference Information:

*Material:
Housing: PA66 UL94V-0 / Natural
*Suitable MR-A1500 series Terminal
*Mates with MR-A1500 series Wafer

Ordering Information & Dimensions


Poles	Dimensions (mm)	
	A	B
02	1.50	4.50
03	3.00	6.00
04	4.50	7.50
05	6.00	9.00
06	7.50	10.50
07	9.00	12.00
08	10.50	13.50
09	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
15	21.00	24.00



MR-A1500 Series 1.50mm Pitch Series Wire to Board Connectors

MR-A1500TF-PT1




1.50mm Pitch Terminal

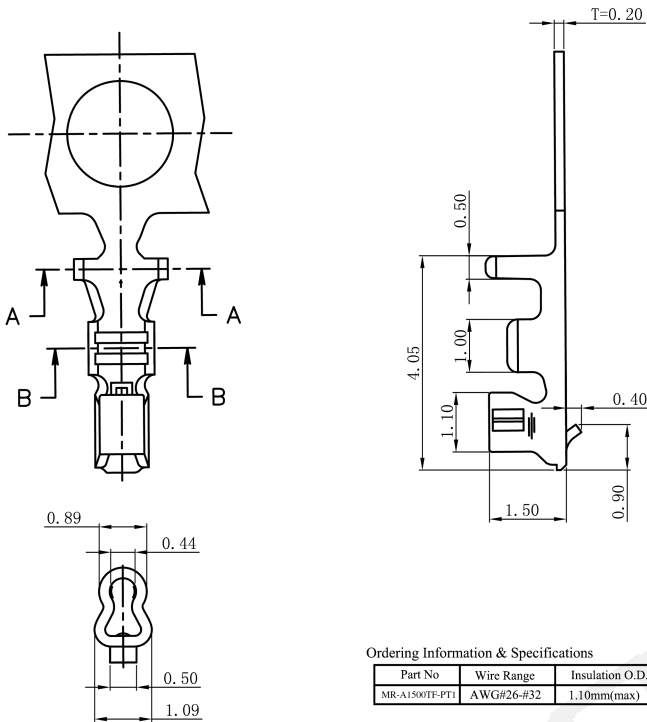

Reference Information:
*Material: Phosphor Bronze / Tin-plated
*Mates with MR-A1500 series Housing

Ordering Information & Specifications					
Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MR-A1500TF-PT1	AWG#26-#32	1.10mm(max)	Phosphor Bronze	Tin-plated	10,000pcs


MR-A1500WR-NP-46BGTK 1.50mm Pitch 90° Single Row Wafer

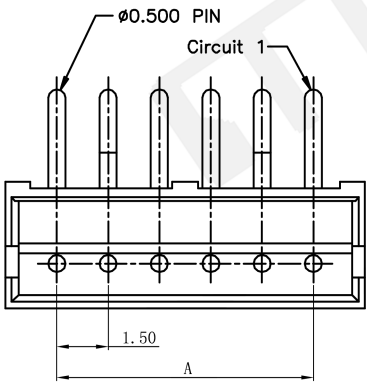

Reference Information:
*Material:
PIN: Brass / Tin-plated
Wafer: PA46, UL94V-0 / Beige
*Suitable MR-A1500 series Housing

Ordering Information & Dimensions


Poles	Dimensions (mm)	
	A	B
02	1.50	4.50
03	3.00	6.00
04	4.50	7.50
05	6.00	9.00
06	7.50	10.50
07	9.00	12.00
08	10.50	13.50
09	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

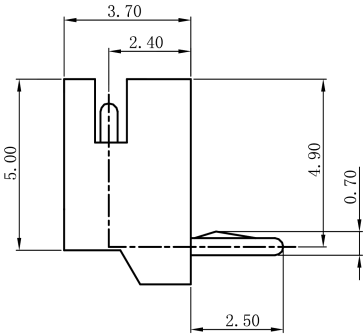



MR-A1500 Series 1.50mm Pitch Series Wire to Board Connectors


MR-A1500WRS-NP-9TBGT 1.50mm Pitch 90° SMT Single Row Wafer

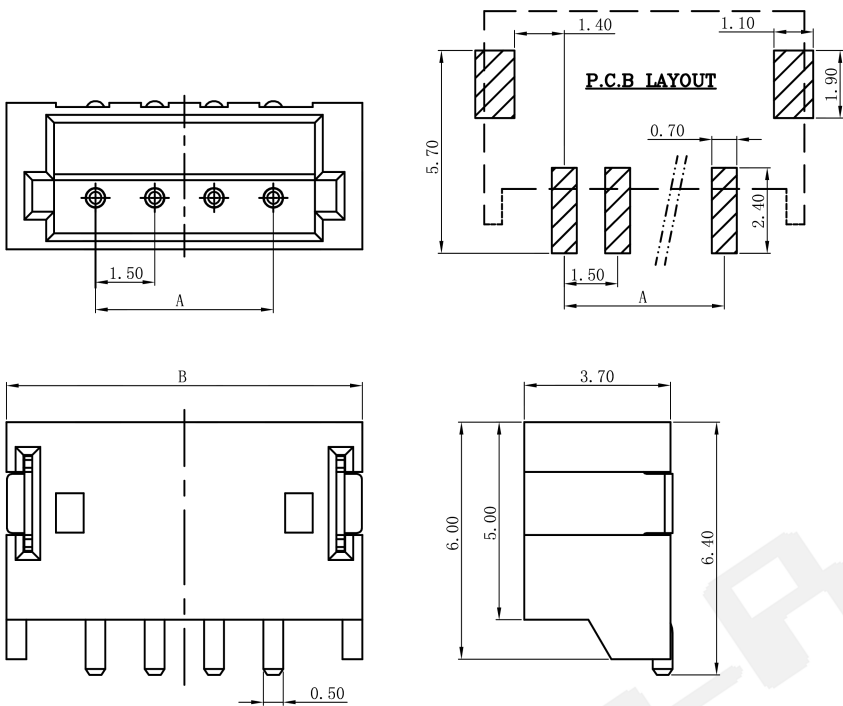

Reference Information:
*Material:
PIN: Brass / Tin-plated
Solder Tabs: Phosphor Bronze / Tin-plated
Wafer: PA9T, UL94V-0 / Natural
*Suitable MR-A1500 series Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	1.50	6.00
03	3.00	7.50
04	4.50	9.00
05	6.00	10.50
06	7.50	12.00
07	9.00	13.50
08	10.50	15.00
09	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50

MR-A1500WVS-NP-6TBGT 1.50mm Pitch SMT Single Row Wafer

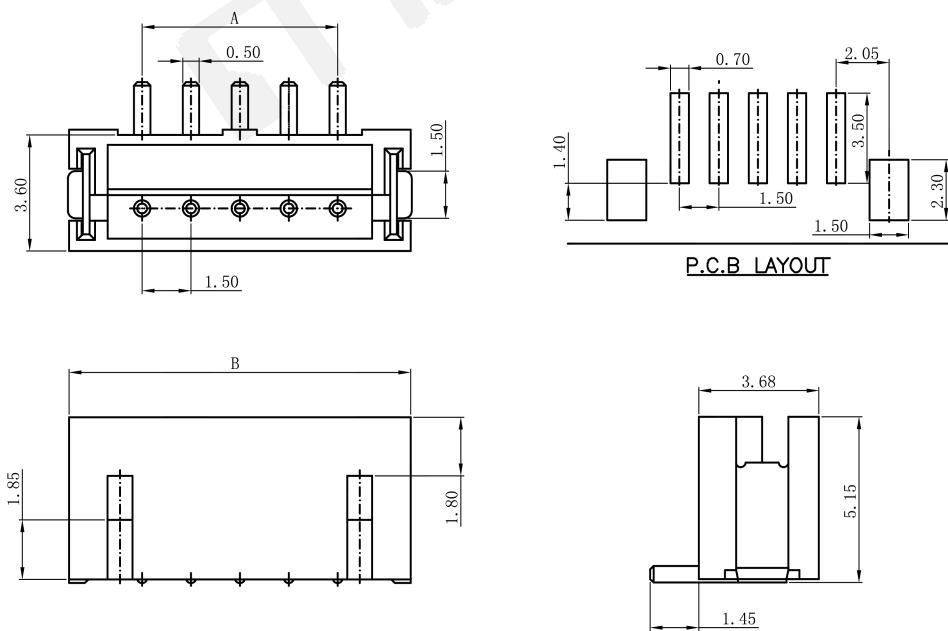


Reference Information:
*Material:
PIN: Brass / Tin-plated
Wafer: PA6T, UL94V-0 / Beige
*Suitable MR-A1500 series Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	1.50	6.00
03	3.00	7.50
04	4.50	9.00
05	6.00	10.50
06	7.50	12.00
07	9.00	13.50
08	10.50	15.00
09	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50



MR-A1500 Series 1.50mm Pitch Series Wire to Board Connectors

MR-A1500WV-NP-46BGT 1.50mm Pitch 180° Single Row Wafer

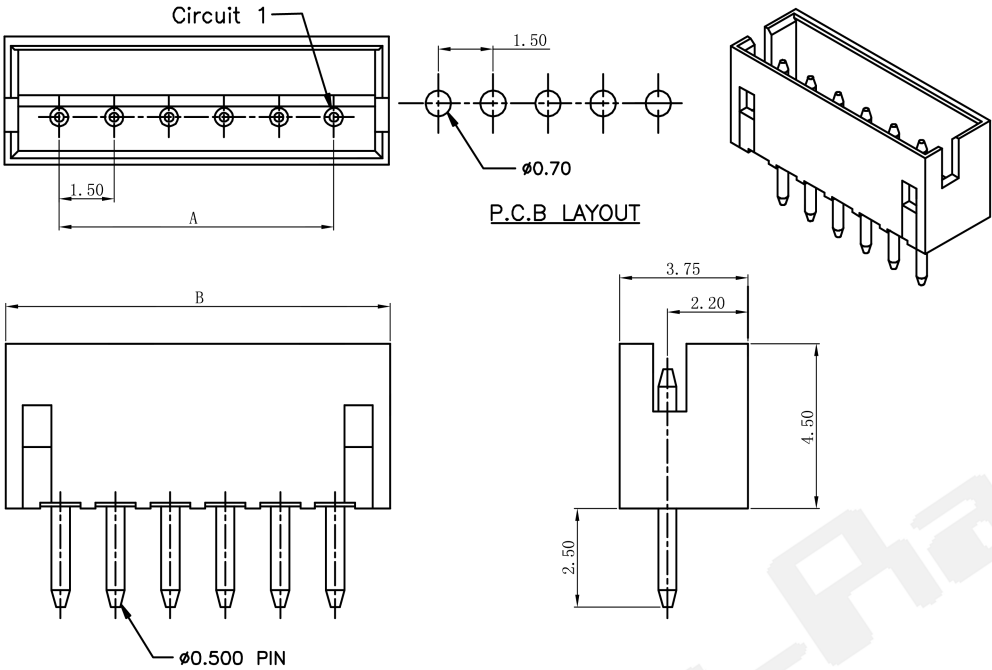

Reference Information:
*Material:
PIN: Brass / Tin-plated
Wafer: PA46, UL94V-0 / Beige
*Suitable MR-A1500 series Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	1.50	4.50
03	3.00	6.00
04	4.50	7.50
05	6.00	9.00
06	7.50	10.50
07	9.00	12.00
08	10.50	13.50
09	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
15	21.00	24.00