





MR-A1505 Series 1.50mm Pitch Series Wire to Board Connectors







SPECIFICATIONS:

- Voltage Rating: 100V AC/DC
- Current Rating: 2A AC/DC
- Withstanding Voltage: 500V AC/Minute
- Temperature Range: -25°C~+85°C
- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 30mΩ Max.
- After Environmental Testing: 50mΩ/Max
- *Mates with MR-A1505 series Wafer

Assembly Layout:

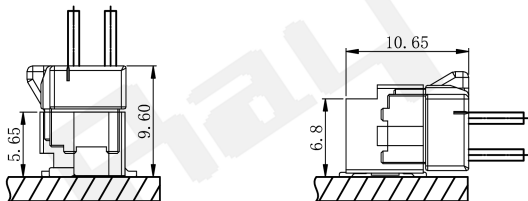

MR-A1505H-2NP-N0NA 50mm Pitch Double Row Housing

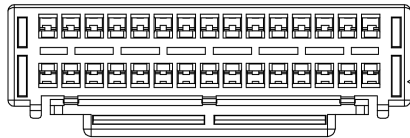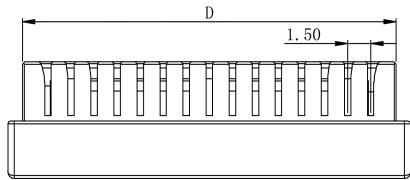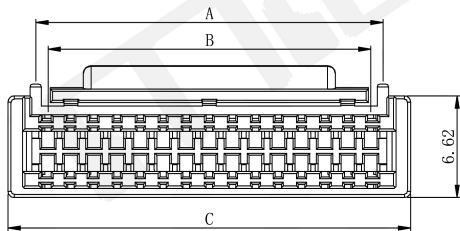

- Reference Information:
- *Material:
 - Housing: PA66 UL94V-0 / Natural
 - *Suitable MR-A1505 series Terminal
 - *Mates with MR-A1505 series Wafer

Ordering Information & Dimensions

CSG PART NO.	Dimension mm			
	A	B	C	D
2*05	7.50	6.00	11.20	9.30
2*06	9.00	7.50	12.70	10.80
2*07	10.50	9.00	14.20	12.30
2*08	12.00	10.50	15.70	13.80
2*09	13.50	12.00	17.20	15.30
2*10	15.00	13.50	18.70	16.80
2*11	16.50	15.00	20.20	18.30
2*12	18.00	16.50	21.70	19.80
2*13	19.50	18.00	23.20	21.30
2*14	21.00	19.50	24.70	22.80
2*15	22.50	21.00	26.20	24.30
2*16	24.00	22.50	27.70	25.80
2*17	25.50	24.00	29.20	27.30
2*18	27.00	25.50	30.70	28.80
2*19	28.50	27.00	32.20	30.30
2*20	30.00	28.50	33.70	31.80






MR-A1505 Series 1.50mm Pitch Series Wire to Board Connectors

MR-A1505TF-PT1

1.50mm Pitch Terminal

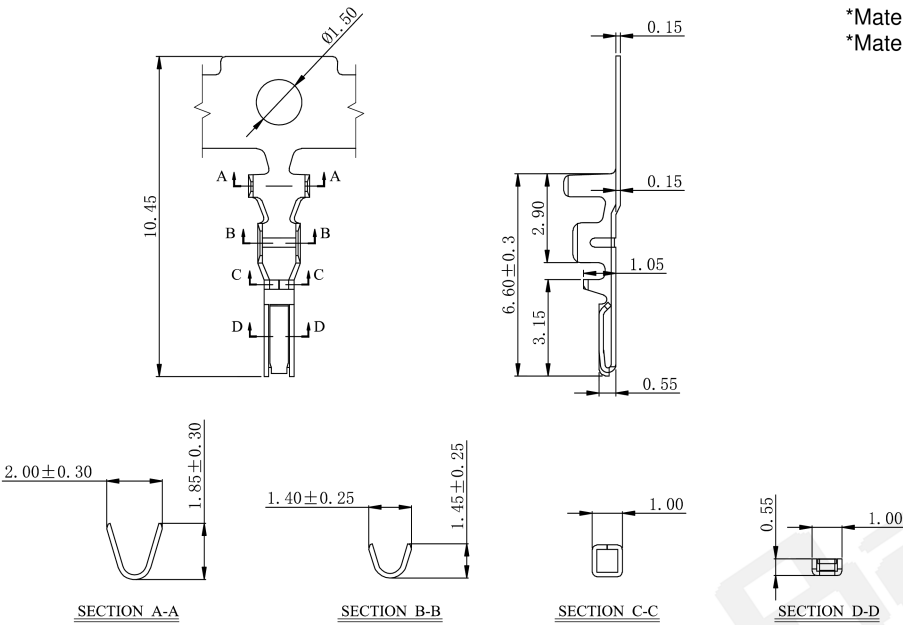


Reference Information:
*Material: Phosphor Bronze / Tin-plated
*Mates with MR-A1505 series Housing

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish
MR-A1505TF-PT1	AWG#24-#28	1.20mm(max)	Phosphor Bronze	Tin-plated

MR-A1505WRS-2NP-L0NAT 1.50mm Pitch 90° SMT Double Row Wafer

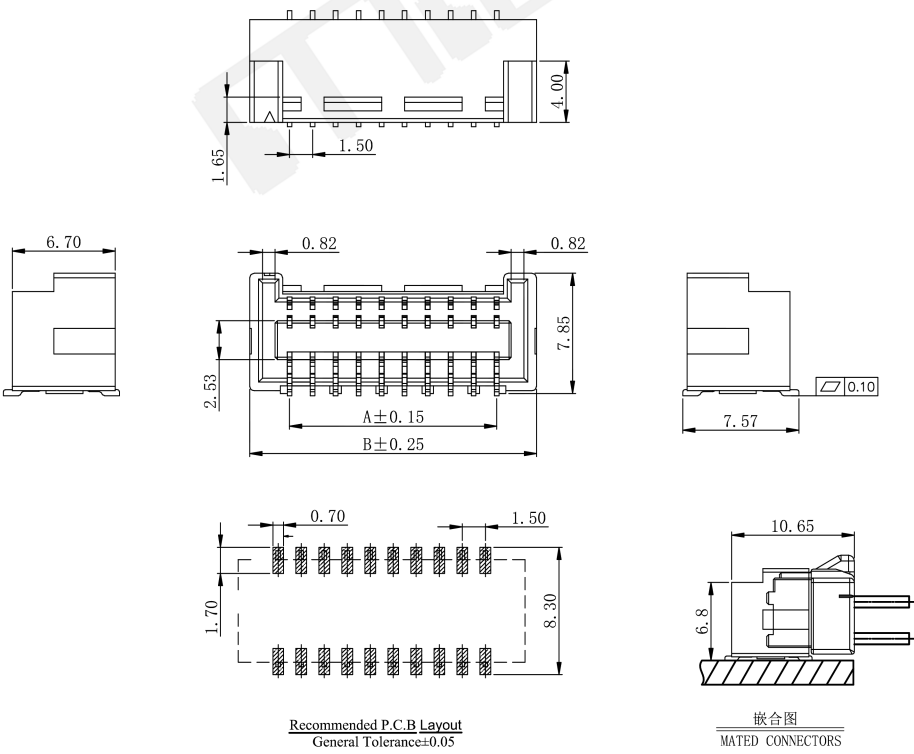

Reference Information:
*Material:
Wafer: LCP, UL94V-0, Natural.
PIN: Solder Tabs: Brass
Plating Method: Brass / Tin-Plated
*Suitable MR-A1505 series Housing


Ordering Information & Dimensions

PART NO.	Dimension mm	
	A	B
2*05	6.00	11.20
2*06	7.50	12.70
2*07	9.00	14.20
2*08	10.50	15.70
2*09	12.00	17.20
2*10	13.50	18.70
2*11	15.00	20.20
2*12	16.50	21.70
2*13	18.00	23.20
2*14	19.50	24.70
2*15	21.00	26.20
2*16	22.50	27.70
2*17	24.00	29.20
2*18	25.50	30.70
2*19	27.00	32.20
2*20	28.50	33.70



MR-A1505 Series 1.50mm Pitch Series Wire to Board Connectors

MR-A1505WVS-2NP-L0NAT 1.50mm Pitch 180° SMT Double Row Wafer

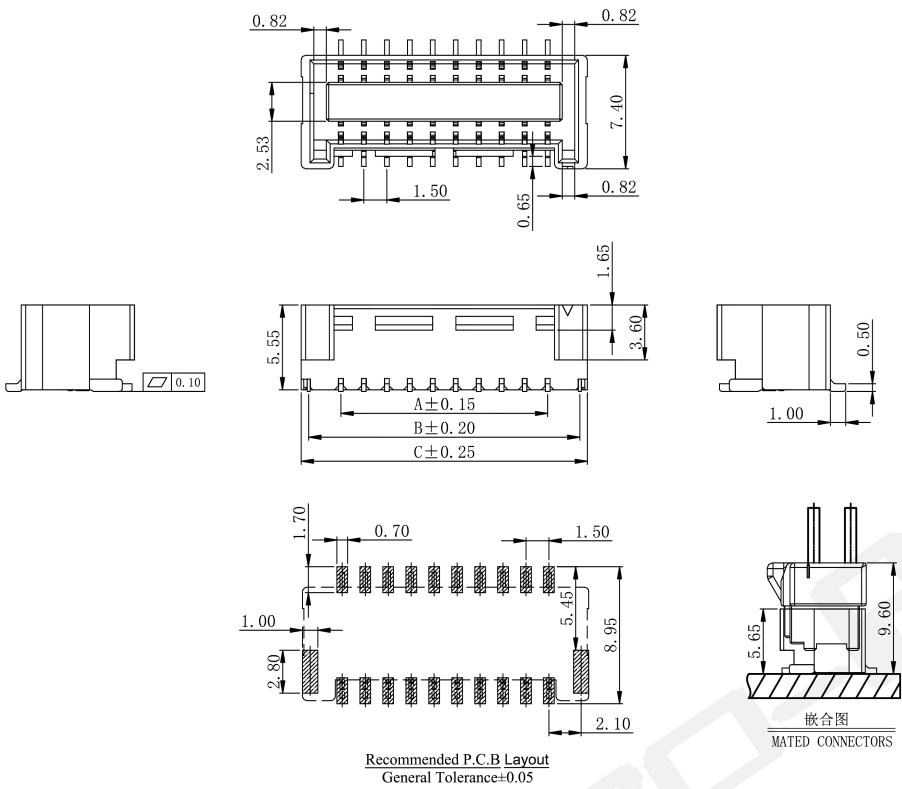

Reference Information:
*Material:
Wafer: LCP, UL94V-0, Natural.
PIN: Solder Tabs: Brass
Finish: Matte Tin plated
*Suitable MR-A1505 series Housing

Ordering Information & Dimensions

PART NO.	Dimension mm		
	A	B	C
2*05	6.00	10.20	11.20
2*06	7.50	11.70	12.70
2*07	9.00	13.20	14.20
2*08	10.50	14.70	15.70
2*09	12.00	16.20	17.20
2*10	13.50	17.70	18.70
2*11	15.00	19.20	20.20
2*12	16.50	20.70	21.70
2*13	18.00	22.20	23.20
2*14	19.50	23.70	24.70
2*15	21.00	25.20	26.20
2*16	22.50	26.70	27.70
2*17	24.00	28.20	29.20
2*18	25.50	29.70	30.70
2*19	27.00	31.20	32.20
2*20	28.50	32.70	33.70