





MR-B4000 Series 4.00mm Pitch Series Board to Board Connectors

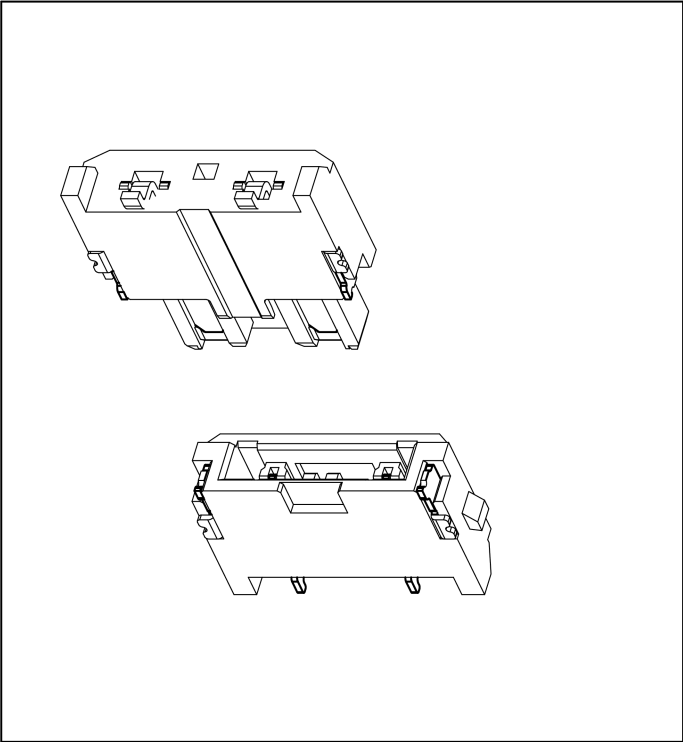

SPECIFICATIONS:





Voltage Rating: 300V AC/DC
Current Rating: 3A AC/DC
Withstanding Voltage: 1700V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.

Assembly Layout:

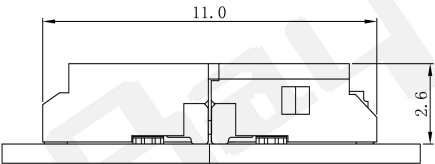


MR-B4000HF-NP-P0WH 4.00mm Pitch Single Row Housing

Reference Information:
*Material:
Housing: PBT UL94V-0 / Natural
*Suitable MR-B4000 series Terminal

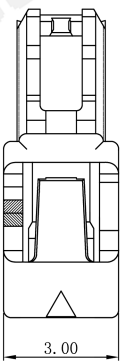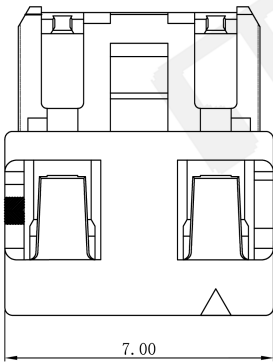

MR-B4000HF-02-P0WH

MR-B4000HF-01-P0WH

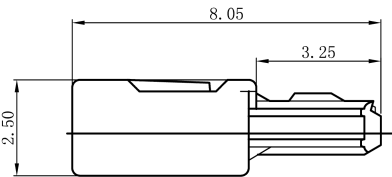


Micro-Ray			
TITLE 4.00mm PITCH BOARD-TO-BOARD CONNECTOR			
SIZE A3	DWG NO MR-B4000	REV 0	SHEET 1




MR-B4000 Series 4.00mm Pitch Series Board to Board Connectors

MR-B4000TF-PT1

4.00mm Pitch Terminal

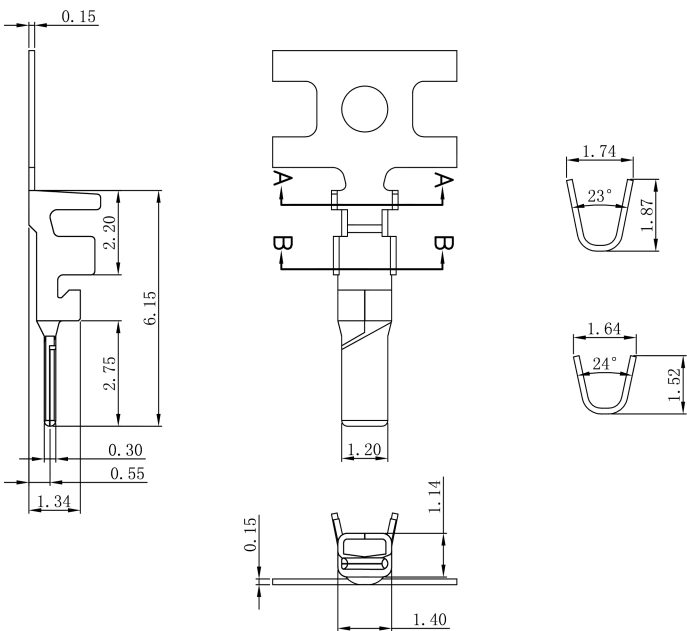

MR-B4000WRMS-02-L0NAT 4.00mm Pitch 90° SMT Single Row Wafer

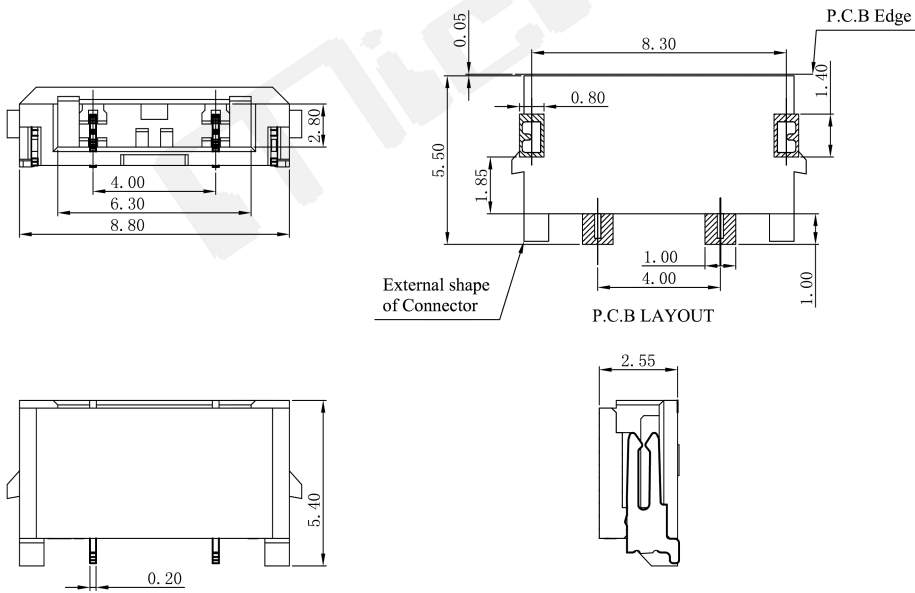

Reference Information:
*Material:
Pin: Phosphor bronze / Tin-plated
Solder Tabs: Phosphor bronze / Tin-plated
Wafer: LCP, UL94V-0 / Natural
*Suitable MR-B4000WRFS series Wafer



TITLE 4.00mm PITCH BOARD-TO-BOARD CONNECTOR

SIZE A3

DWG NO MR-B4000


REV 0

SHEET 2

Micro-Ray

MR-B4000 Series 4.00mm Pitch Series Board to Board Connectors

MR-B4000WRFS-02-L0NAT 4.00mm Pitch 90° SMT Single Row Wafer

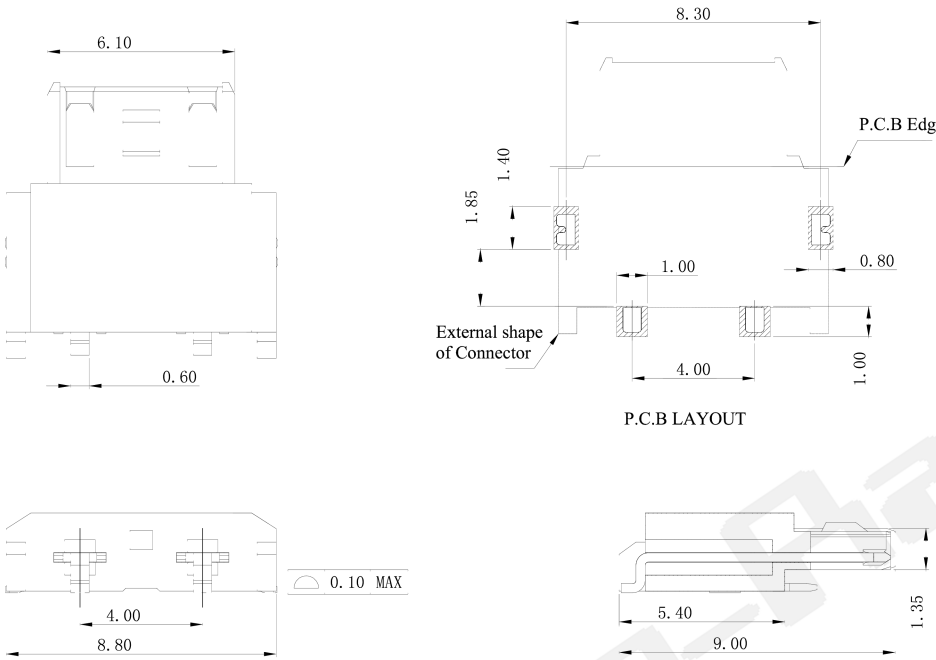

Reference Information:
*Material:
Pin: Phosphor bronze / Tin-plated
Solder Tabs: Phosphor bronze / Tin-plated
Wafer: LCP, UL94V-0 / Natural
*Suitable MR-B4000WRMS series Wafer

Micro-Ray			
TITLE 4.00mm PITCH BOARD-TO-BOARD CONNECTOR			
SIZE A3	DWG NO MR-B4000	REV 0	SHEET 3