





MR-C2510 Series 2.50mm Pitch Series Wire to Wire Connectors

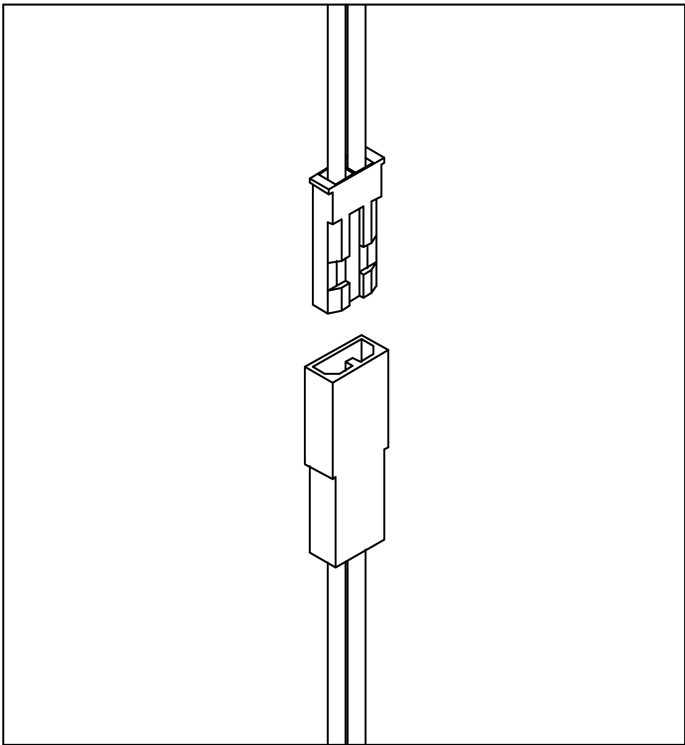

SPECIFICATIONS:


- Voltage Rating: 130V AC/DC
- Current Rating: 1A AC/DC
- Withstanding Voltage: 800V AC/Minute
- Temperature Range: -25°C~+85°C
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 20mΩ Max.
- Applicable Wire Range: AWG#26~30.

Assembly Layout:

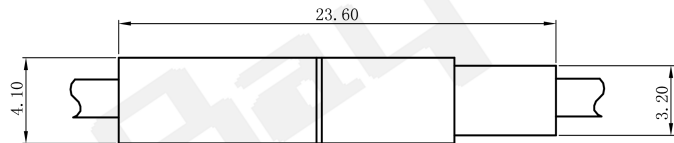

MR-C2510HF-NP-N0XX 2.50mm Pitch Single Row Housing

- Reference Information:
- *Material:
 - Housing: PA66 UL94V-0 / White or Red
 - *Suitable MR-C2510 series Terminal
 - *Mates with MR-C2510 Male Housing

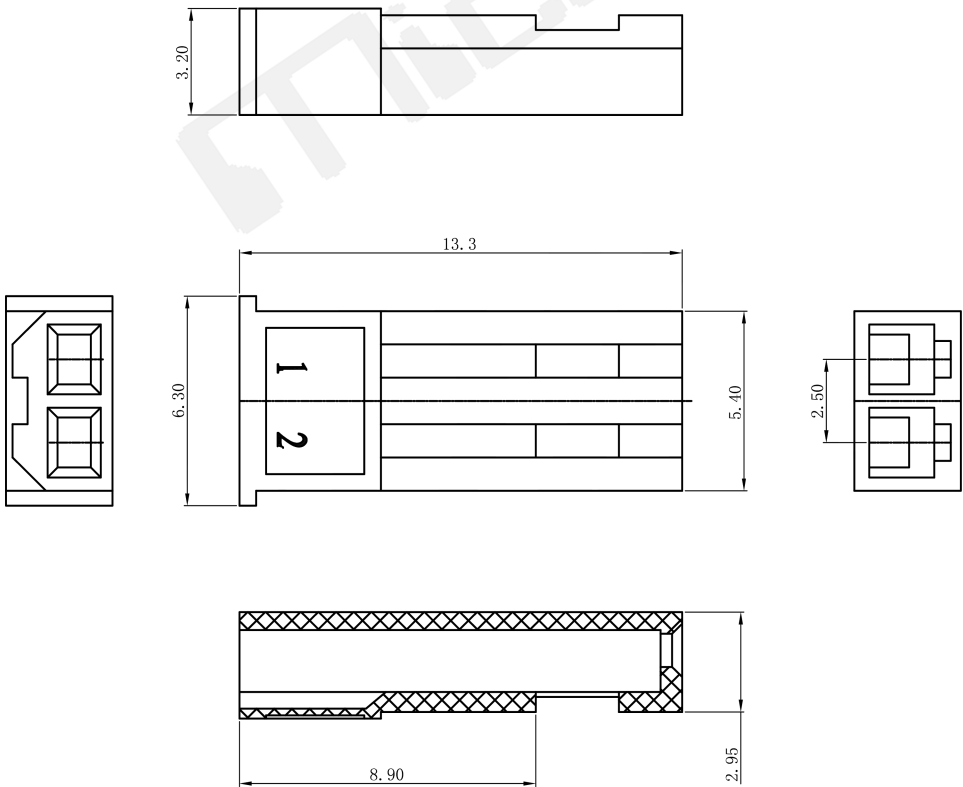


TITLE 2.50mm PITCH WIRE-TO-WIRE CONNECTOR			
SIZE A3	DWG NO MR-C2510	REV 0	SHEET 1




(MR-C2510 Series 2.50mm Pitch Series Wire to Wire Connectors

MR-C2510HM-NP-NOXX

2.50mm Pitch Single Row Housing

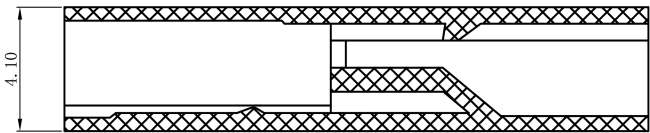


Reference Information:
*Material:
Housing: PA66 UL94V-0 / White or Red
*Suitable MR-C2510 series Terminal
*Mates with MR-C2510 Female Housing

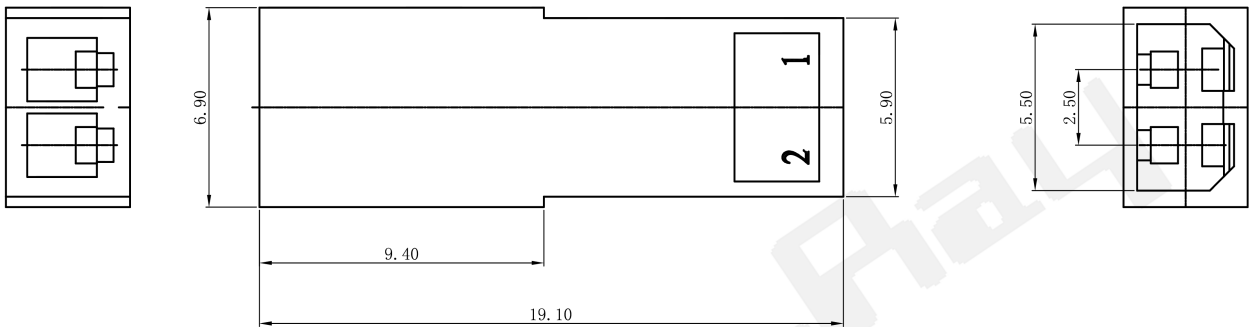


MR-C2510TF-PXX

2.50mm Pitch Terminal

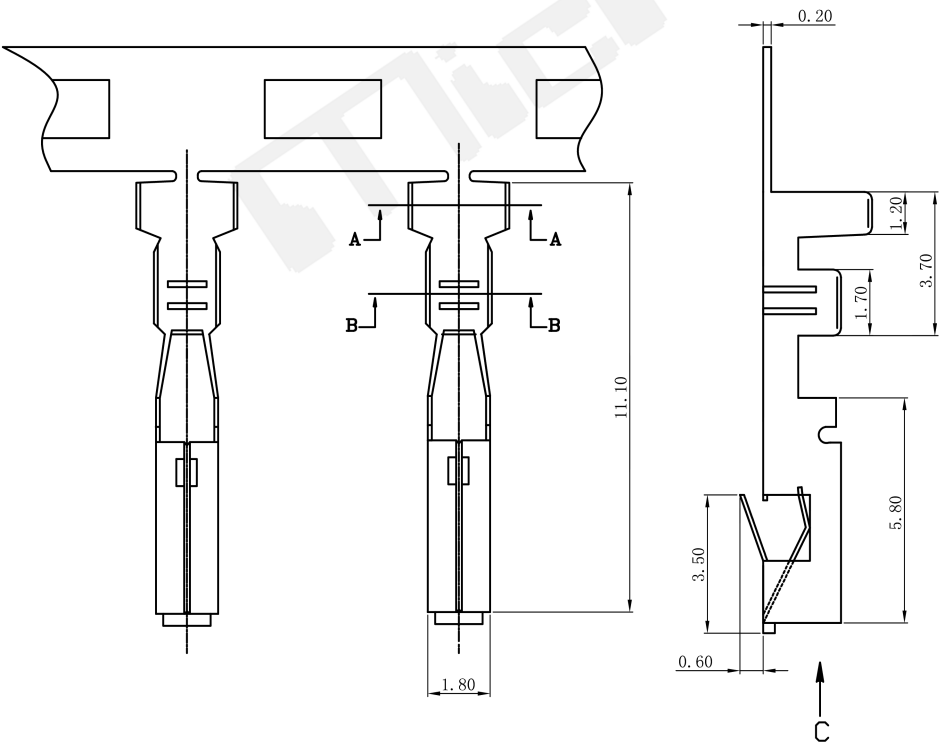

Reference Information:
*Material: Phosphor Bronze / Tin-plated or Gold Flash
*Mates with MR-C2510 series Housing

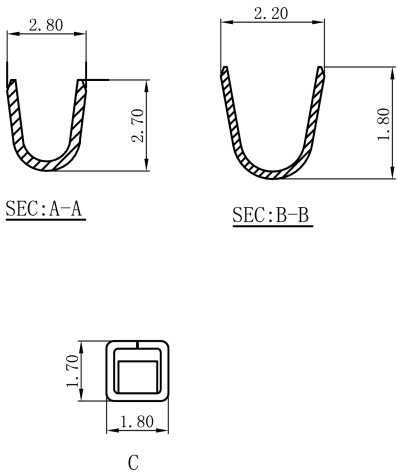

Ordering Information & Specifications


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MR-C2509TF-PT1	AWG#26-#32	1.10mm(max)	Phosphor Bronze	Tin-plated	8,000pcs
MR-C2509TF-PG1	AWG#26-#32	1.10mm(max)	Phosphor Bronze	Gold Flash	8,000pcs



MR-C2510 Series 2.50mm Pitch Series Wire to Wire Connectors

MR-C2510TM-PXX

2.50mm Pitch Terminal

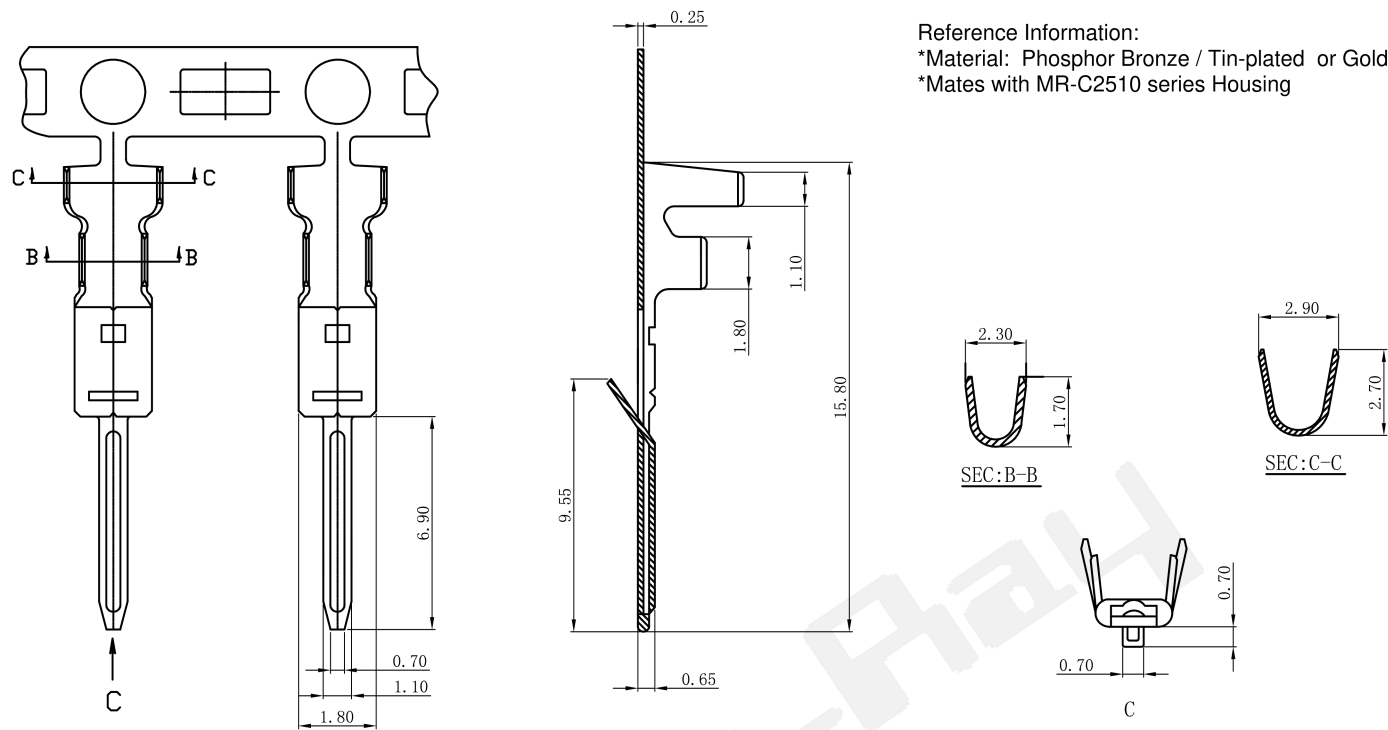

Reference Information:
*Material: Phosphor Bronze / Tin-plated or Gold Flash
*Mates with MR-C2510 series Housing

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MR-C2510TM-PT1	AWG#26-#32	1.10mm(max)	Phosphor Bronze	Tin-plated	10,000pcs
MR-C2510TM-PG1	AWG#26-#32	1.10mm(max)	Phosphor Bronze	Gold Flash	10,000pcs