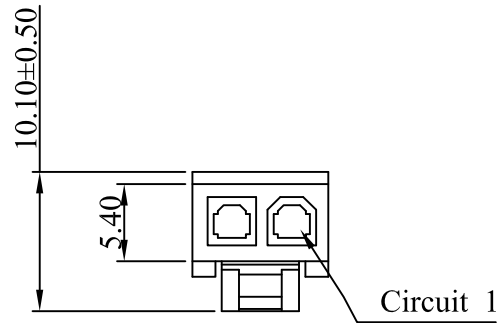
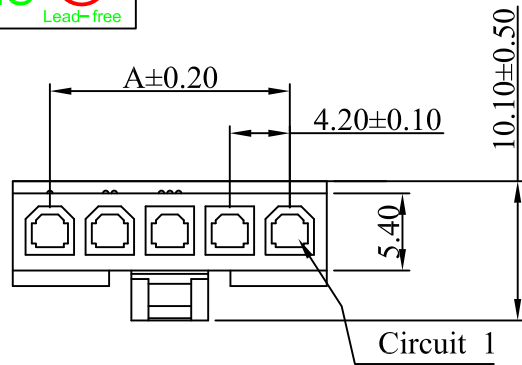


SPECIFICATIONS:

Voltage Rating: 600V AC / DC

Current Rating: 9A AC / DC

Withstanding Voltage: 1500V AC/minute

Temperature Range: -25°C~+85°C

Insulation Resistance: $\geq 1000M\Omega$

Contact Resistance: $\leq 10m\Omega$

After Environmental Testing: $\leq 20m\Omega$

*Mates with C4255 series Wafer

Material: Nylon 66,UL94V-2, Natural&Black

MR-C4255 HF - NP - XX XX
① ② ③ ④ ⑤









① Series No.

② Plastic Shell Category: HF-Male Housing,

③ Circuit No.: 02-2PIN

④ Material: N0-Nylon66, UL94V-0,
N2-Nylon66, UL94V-2

⑤ Color: BK-Black, NA-Natural ,

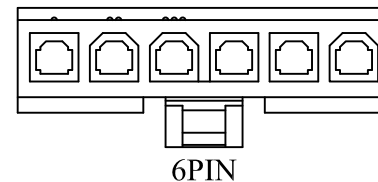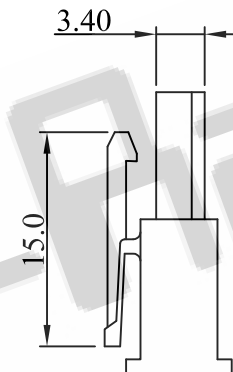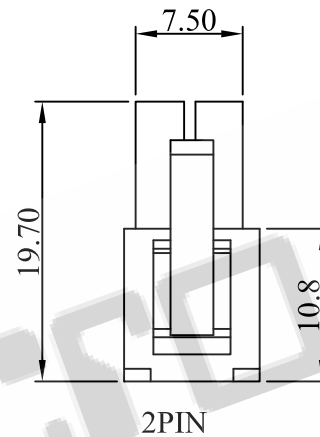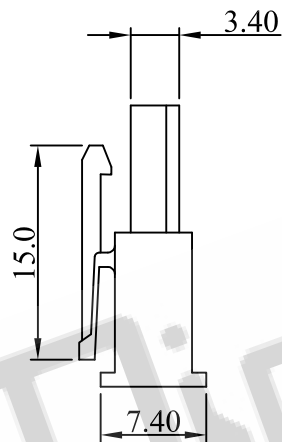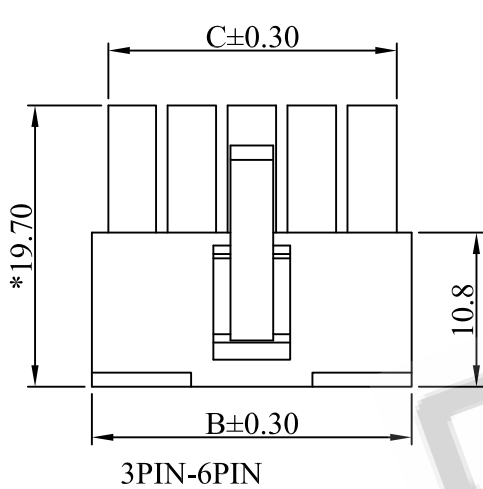

Ordering Information& Dimensions

Poles	Dimensions (mm)		
	A	B	C
02P	4.20	9.60	7.50
03P	8.40	13.80	11.60
04P	12.60	18.00	15.80
05P	16.80	22.20	20.20
06P	21.00	26.60	24.10

										PART NO MR-C4255 HF-NP-XX XX			
										TITLE 4.2mm Crimp Style Connectors			
	A	B	Modify the drawing frame format			APPD	CHK	DR	DATE	UNIT MM	SCALE 1/1	NUMBER	REV B
DATE	OLD REV	NEW REV	DESCRIPTION	CHK	APPD	PROJECT 