





MR-C4500 Series 4.50mm Pitch Series Wire to Wire Connectors

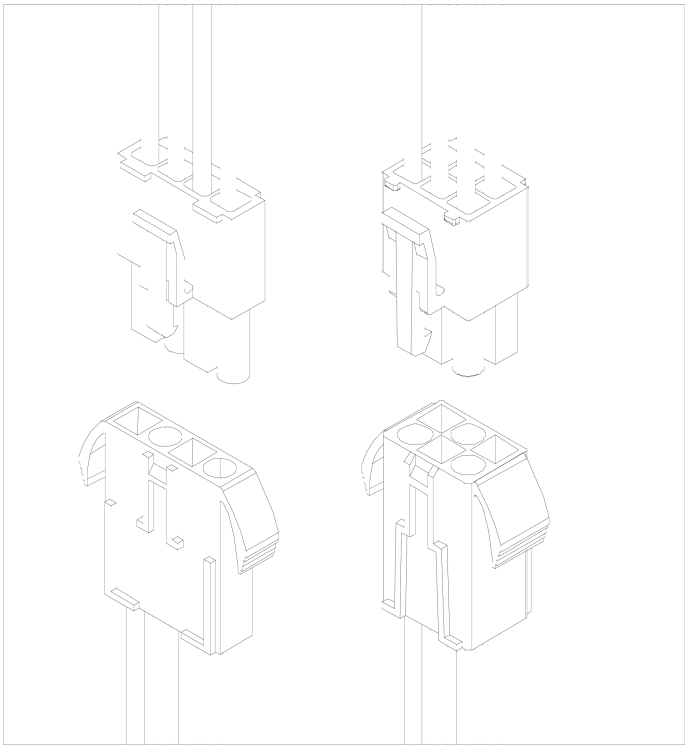

SPECIFICATIONS:


Voltage Rating: 300V AC/DC
Current Rating: 10A AC/DC
Withstanding Voltage: 1500V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 7mΩ Max.
Applicable Wire Range: AWG#20~26.

Assembly Layout:

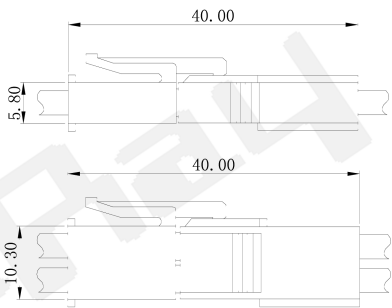


MR-C4500HF-NP-N0XX 4.50mm Pitch Single Row Housing


Reference Information:
*Material:
Housing: PA66 UL94V-0 / Natural or Black
*Suitable MR-C4500 series Terminal
*Mates with MR-C4500 Male Housing






MR-C4500HF-2P



MR-C4500HF-3P




MR-C4500HF-4P

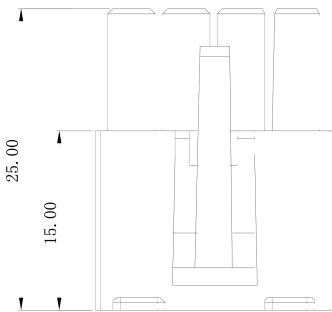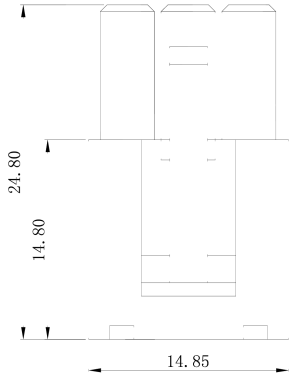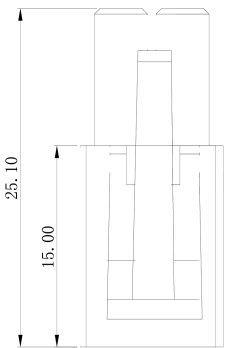




MR-C4500 Series 4.50mm Pitch Series Wire to Wire Connectors


MR-C4500HF-XNP-N0NA 4.50mm Pitch Dual Row Housing

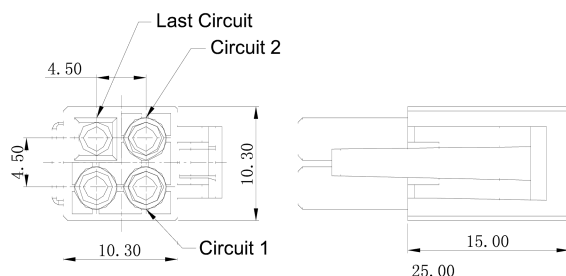

MR-C4500HF-2*02P

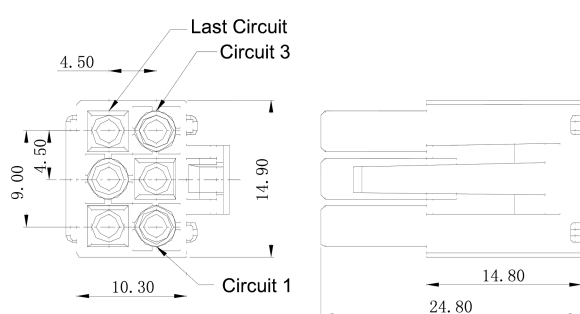


MR-C4500HF-2*03P

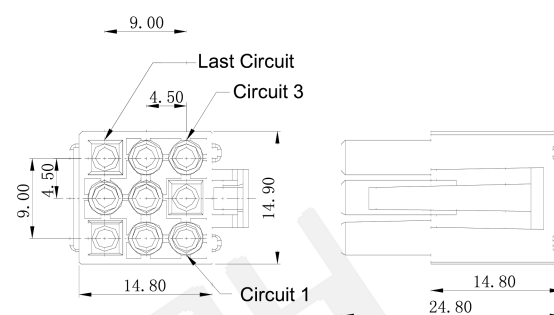


MR-C4500HF-3*03P


MR-C4500HM-NP-N0XX 4.50mm Pitch Single Row Housing

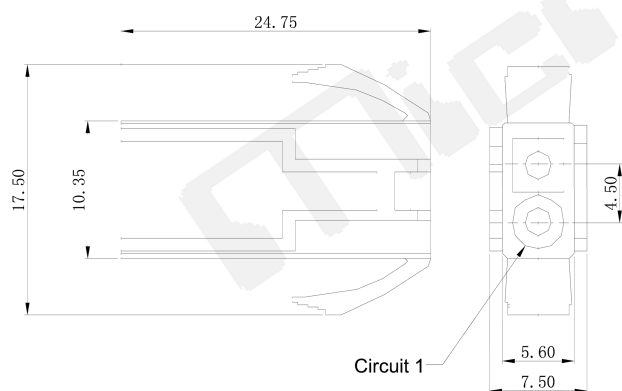

MR-C4500HM-2P

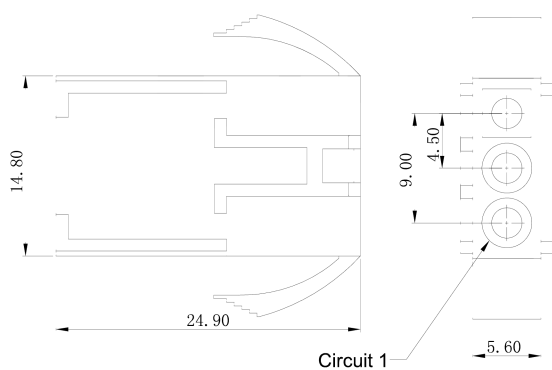

MR-C4500HM-3P

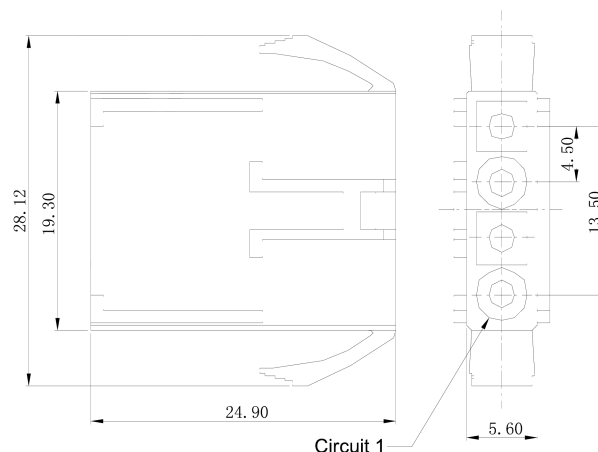

MR-C4500HM-4P

Reference Information:

*Material:

Housing: PA66 UL94V-0 / Natural or Black


*Suitable MR-C4500 series Terminal

*Mates with MR-C4500 Female Housing




MR-C4500 Series 4.50mm Pitch Series Wire to Wire Connectors

MR-C4500HM-XNP-N0NA 4.50mm Pitch Single/Dual Row Housing

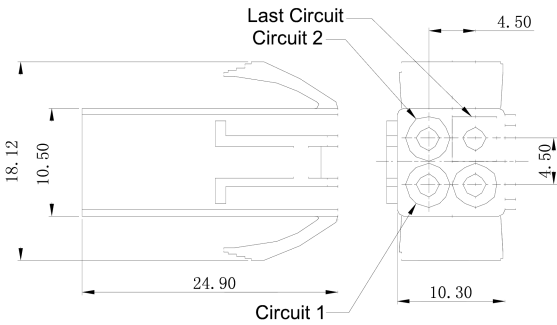


MR-C4500HM-2*02P

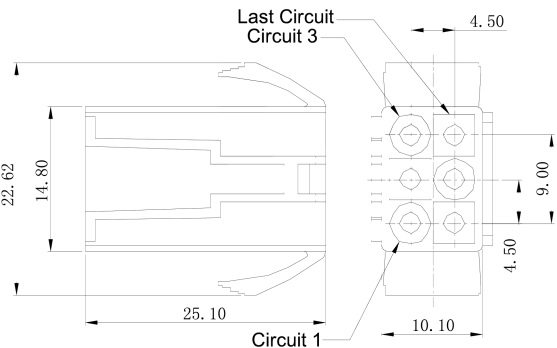


MR-C4500HM-2*03P

Reference Information:
*Material:
Housing: PA66 UL94V-0 / Natural
*Suitable MR-C4500 series Terminal
*Mates with MR-C4500 Female Housing

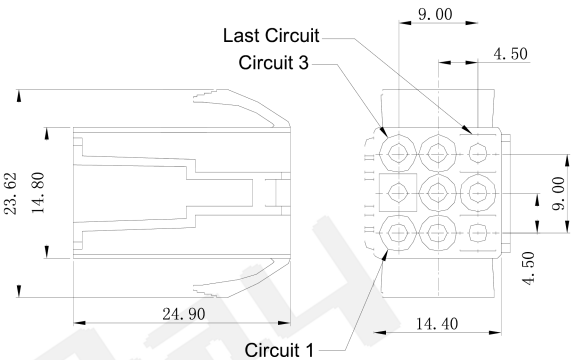

MR-C4500HM-3*03P

MR-C4500TF-BT1 4.50mm Pitch Terminal

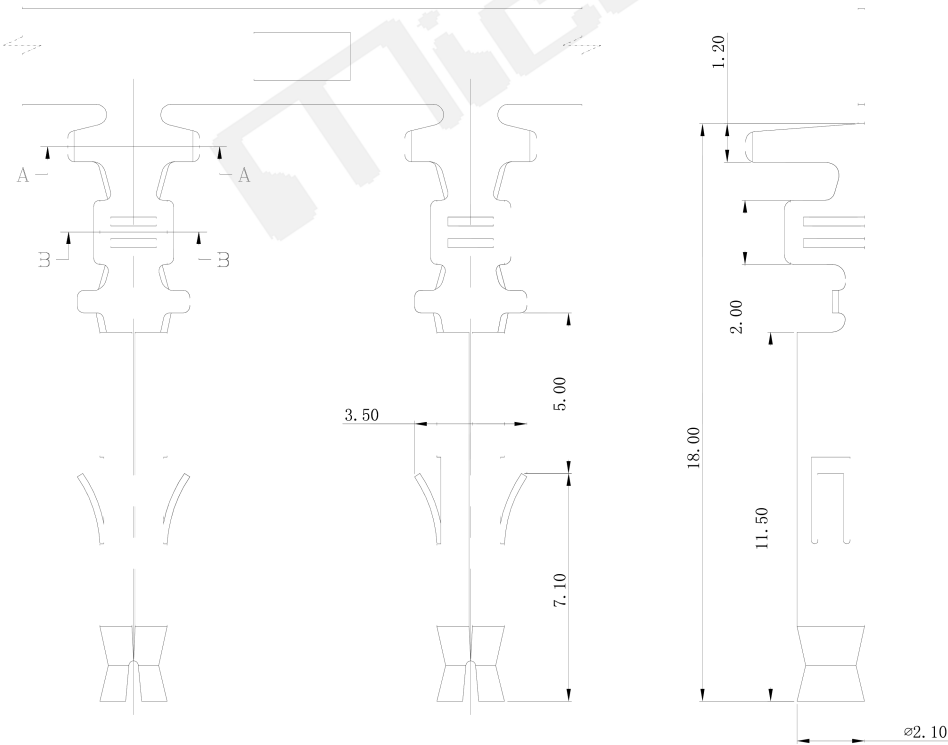

Reference Information:
*Material: Brass / Tin-plated
*Mates with MR-C4500 series Housing

Ordering Information & Specifications


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MR-C4500TF-BT1	AWG#20-#26	2.70mm(max)	Brass	Tin-plated	5,000pcs



MR-C4500 Series 4.50mm Pitch Series Wire to Wire Connectors

MR-C4500TM-BT1

4.50mm Pitch Terminal

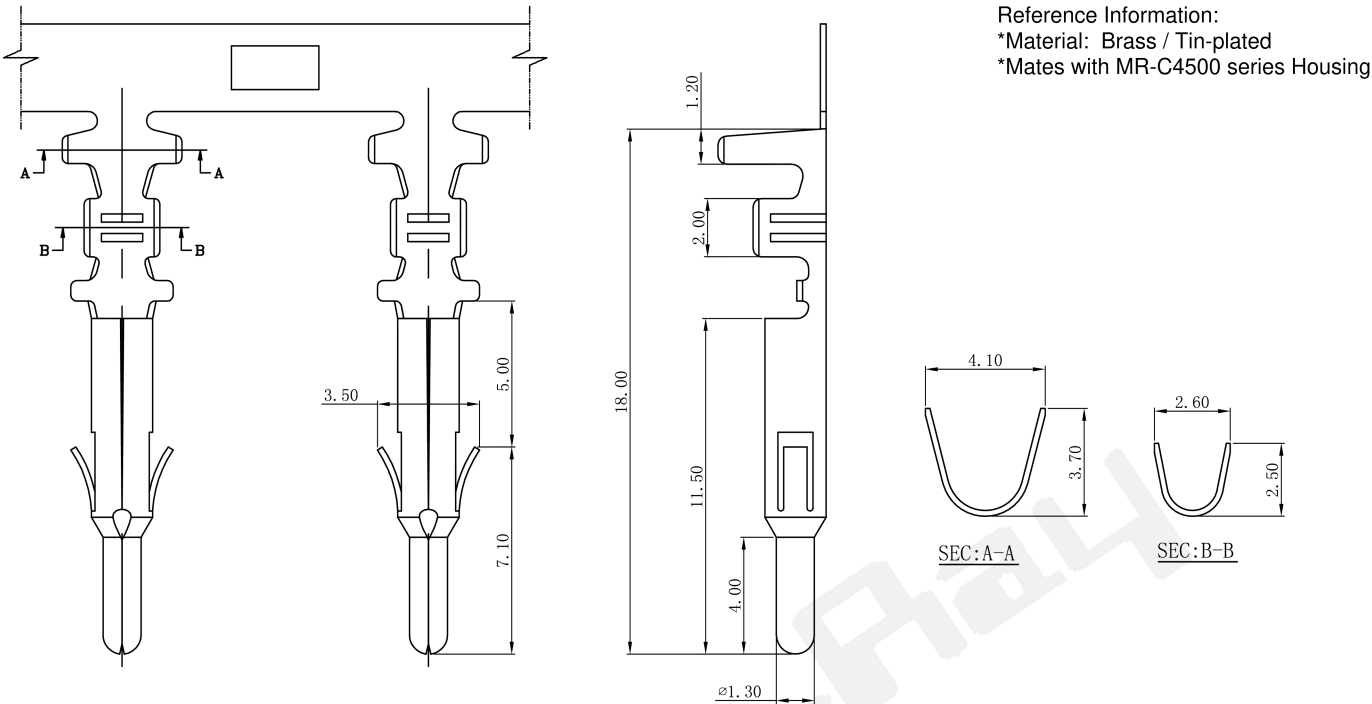

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MR-C4500TM-BT1	AWG#20-#26	2.70mm(max)	Brass	Tin-plated	5,000pcs