




Micro-Ray

MICRO-RAY ELECTRONICS, INC.

www.micro-ray.com

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

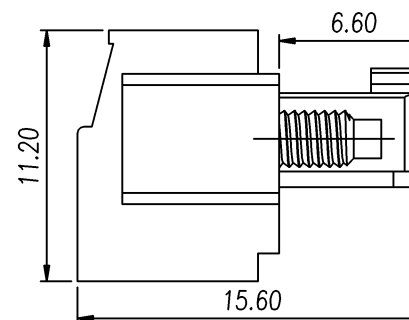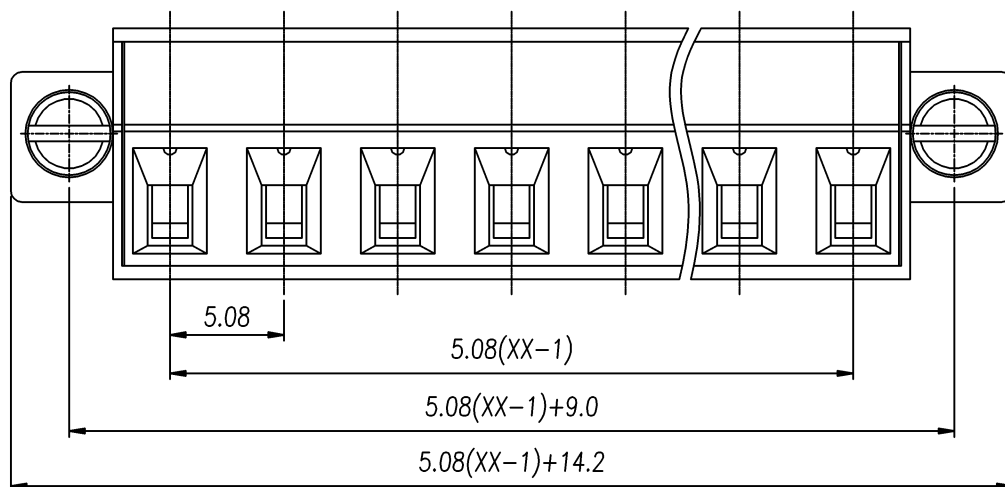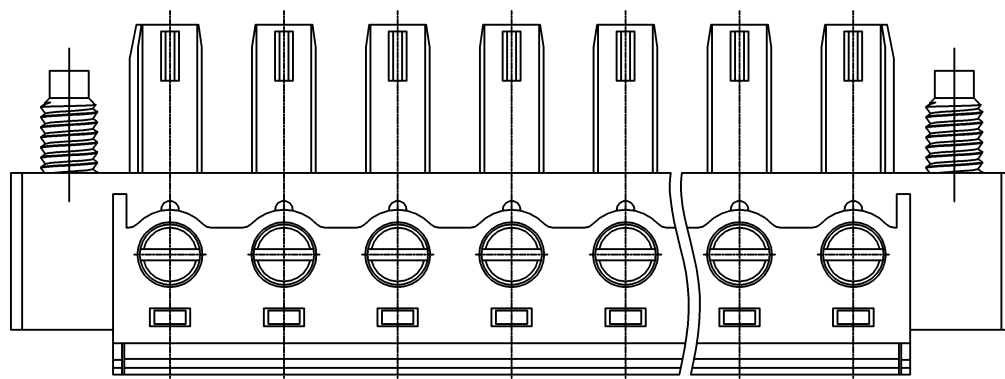

UL/CUL Technical Data		c [®] 		
Use Group		B	C	D
Rated Voltage [V]		300	-	300
Rated Current [A]		8	-	8
Wire Range Solid/Stranded [AWG]		28-16		
Withstanding Voltage		1600V/1Min		
IEC Technical Data				
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage [V]		250	320	630
Rated Current [A]		8	8	8
Impulse withstand voltage [KV]		4.0	4.0	4.0
Conductor cross section Solid/ flexible [mm²]		0.2-1.5		
Material				
Insulation Material		PA66		
Inflammability		UL94V-0		
Contact Material		Copper alloy		
Contactive Coating		Sn Plated		
Other Data				
Pitch	Poles	[mm] / [P]	5.08 / 02-24	
Stripping Length		[mm]	6~7	
Screw	Torque(Max)	[N.m]	M2/0.2	
Operating temperature		[°C]	-40~105	
Soldering temperature			-	
Pin Dimensions		[mm]	-	
PCB	PCB Hole Diameter	[mm]	-	

linear dimension(Tolerances Standard GB/T 14486-2008)


— ▯ ⊥

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

Micro-Ray

MICRO-RAY ELECTRONICS, INC.

THIRD ANGLE PROJECTION

/ V0
REV

/ TITLE

MR-15EDGKM-5.08-XXP-1YY-00A