


Micro-Ray

MICRO-RAY ELECTRONICS, INC.





www.micro-ray.com

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

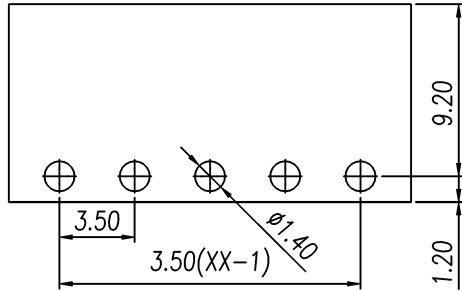

P.C.B. LAYOUT

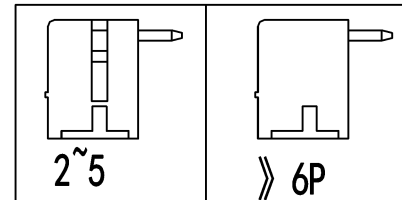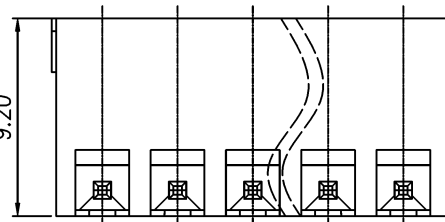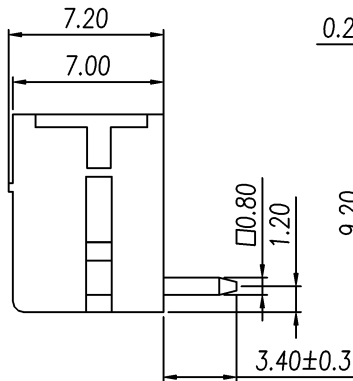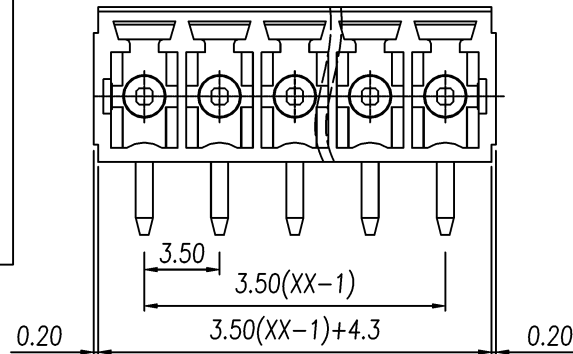

UL/CUL Technical Data		c701us		
Use Group		B	C	D
Rated Voltage [V]		300	-	300
Rated Current [A]		8	-	8
Wire Range Solid/Stranded [AWG]		-		
Withstanding Voltage		1600V/1Min		
IEC Technical Data				
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage [V]		160	160	250
Rated Current [A]		7	7	7
Impulse withstand voltage [KV]		2.5	2.5	2.5
Conductor cross section Solid/ flexible [mm²]		-		
Material				
Insulation Material		PA66		
Inflammability		UL94V-0		
Contact Material		Copper alloy		
Contactive Coating		Sn Plated		
Other Data				
Pitch	Poles [mm] / [P]	3.5 / 02~24		
Stripping Length [mm]		-		
Screw	Torque(Max) [N.m]	-		
Operating temperature [°C]		-40~105		
Soldering temperature		260°C/5S		
Pin Dimensions [mm]		0.8*0.8		
PCB Hole Diameter [mm]		Ø1.4		


linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250	to 10	over 10 to 30	over 30 to 60	over 60 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	±0.20	±0.40	±0.60	±1.00

Micro-Ray

MICRO-RAY ELECTRONICS, INC.

THIRD ANGLE PROJECTION



REV V0

TITLE MR-15EDGRC-3.5-XXP-1YY-00A