




Micro-Ray

MICRO-RAY ELECTRONICS, INC.

www.micro-ray.com

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

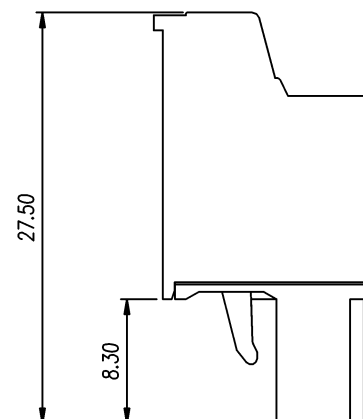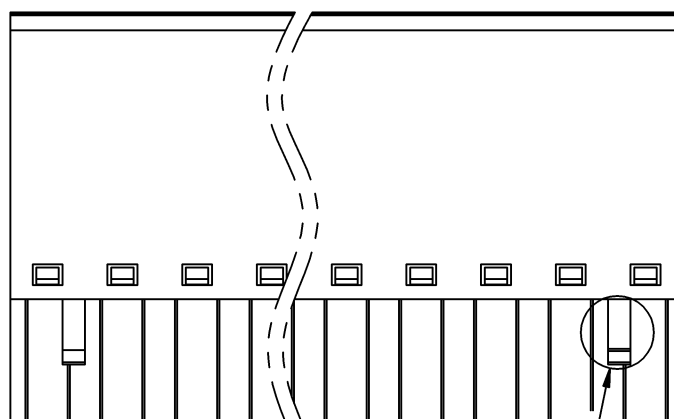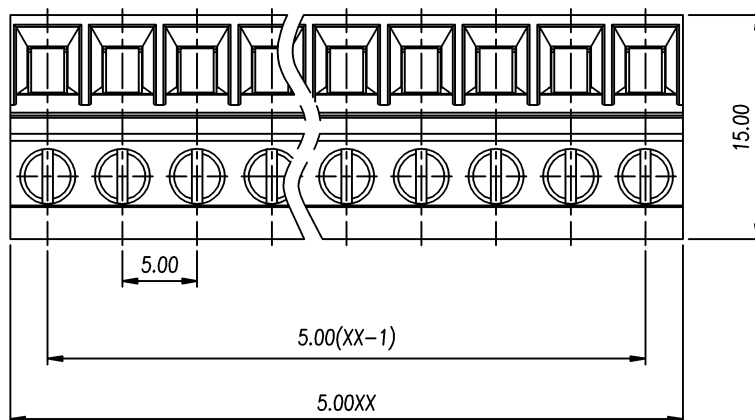

2P时只保留此卡钩

linear dimension(Tolerances Standard GB/T 14486-2008)

— □ ⊥


variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UL/CUL Technical Data		c [®]  us		
Use Group		B	C	D
Rated Voltage	[V]	300	-	300
Rated Current	[A]	15	-	10
Wire Range		28-12		
Solid/Stranded	[AWG]			
Withstanding Voltage		1600V/1Min		
IEC Technical Data				
Overvoltage Category		III	III	II
Contamination Class		3	2	2
Rated Voltage	[V]	250	320	630
Rated Current	[A]	12	12	12
Impulse withstand voltage	[KV]	4.0	4.0	4.0
Conductor cross section		0.2-2.5		
Solid/ flexible	[mm²]			
Material				
Insulation Material		PA66		
Inflammability		UL94V-0		
Contact Material		Copper alloy		
Contactive Coating		Ni Plated		
Other Data				
Pitch	Poles	[mm] / [P]	5.0 / 02-24	
Stripping Length		[mm]	9~10	
Screw	Torque(Max)	[N.m]	M2.5/0.4	
Operating temperature		[°C]	-40~105	
Soldering temperature			-	
Pin Dimensions		[mm]	-	
PCB	PCB Hole Diameter	[mm]	-	

Micro-Ray

MICRO-RAY ELECTRONICS, INC.

/THIRD ANGLE PROJECTION

/ V0
REV

/ TITLE

MR-2EDGKC-5.0-XXP-1YY-00A