


Micro-Ray

MICRO-RAY ELECTRONICS, INC.




www.micro-ray.com

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

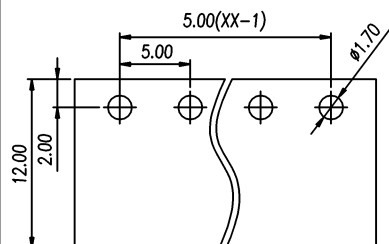

P.C.B. LAYOUT

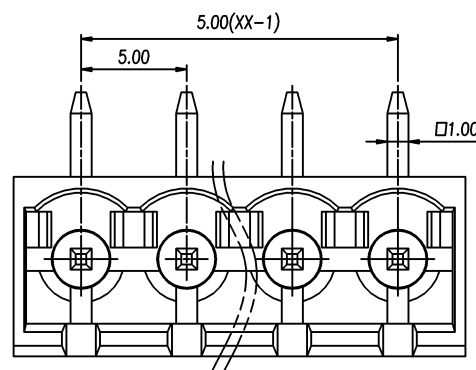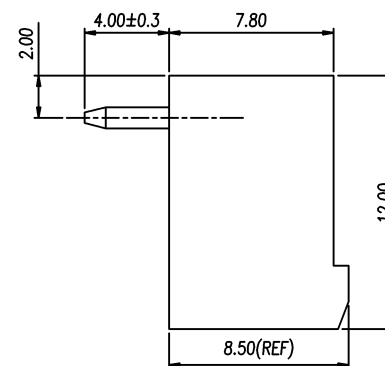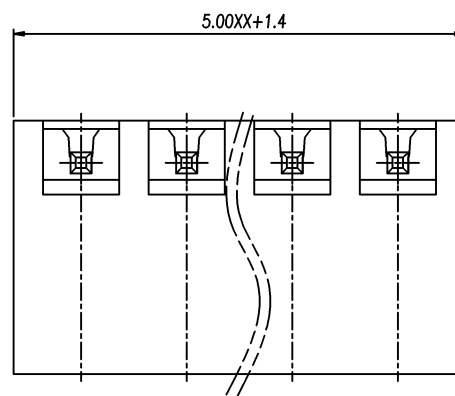

UL/CUL Technical Data

Use Group	B	C	D
Rated Voltage [V]	300	-	300
Rated Current [A]	15	-	10
Wire Range Solid/Stranded [AWG]	-		
Withstanding Voltage	1600V/1Min		

IEC Technical Data

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	250	320	400
Rated Current [A]	10	10	10
Impulse withstand voltage [KV]	4.0	4.0	4.0

Conductor cross section Solid/ flexible [mm ²]	-
--	---

Material

Insulation Material	PA66
Inflammability	UL94V-0
Contact Material	Copper alloy
Contactive Coating	Sn Plated

Other Data

Pitch	Poles	[mm] / [P]	5.0 / 02-24	
Stripping Length			[mm]	-
Screw	Torque(Max)		[N.m]	-
Operating temperature			[°C]	-40~105
Soldering temperature			260°C/5S	
Pin Dimensions			[mm]	1.0*1.0
PCB	PCB Hole Diameter		[mm]	Ø1.7

linear dimension(Tolerances Standard GB/T 14486-2008)




variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

Micro-Ray

MICRO-RAY ELECTRONICS, INC.

第三视角/THIRD ANGLE PROJECTION



版本 / REV V0

TITLE

MR-2EDGRC-5.0-XXP-1YY-00A