


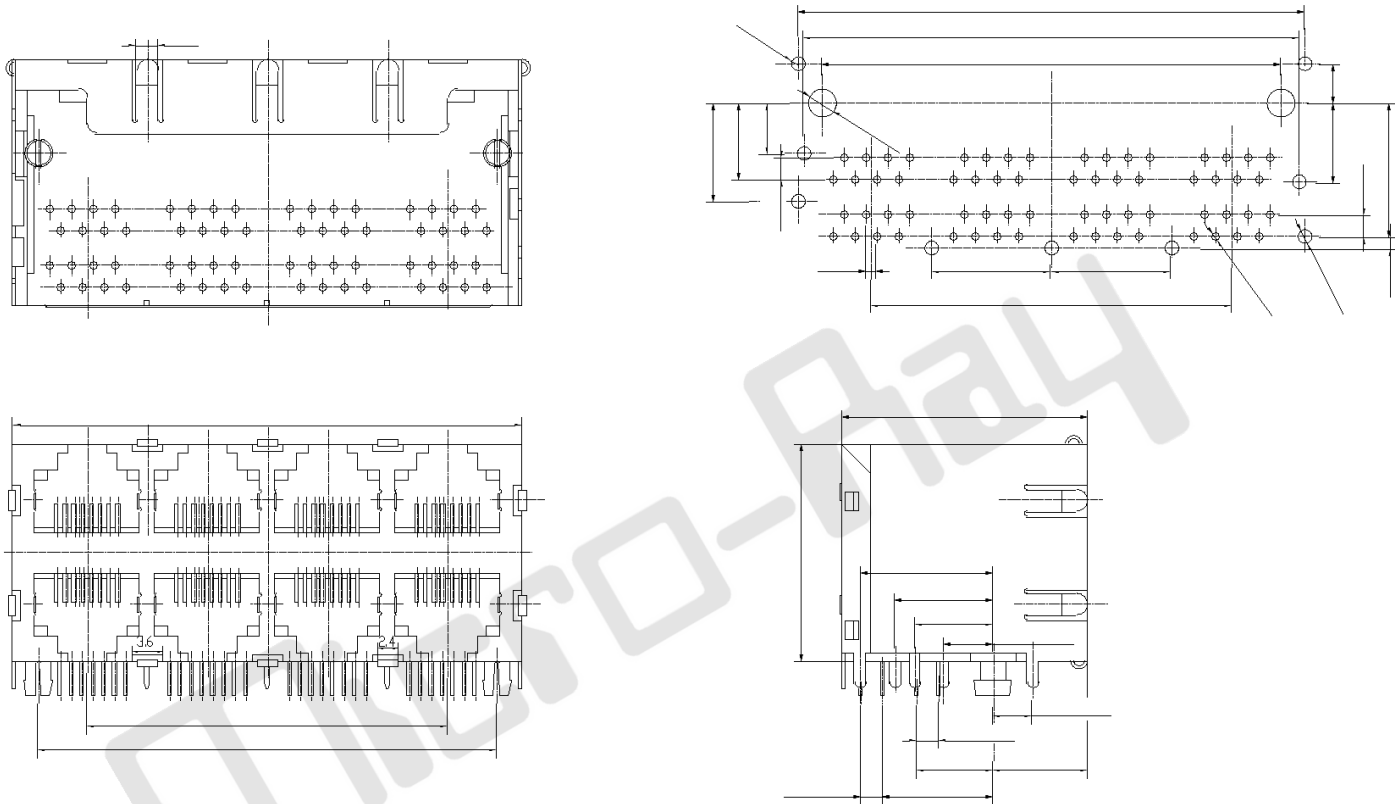

Specification

- 1. Insulation Resistance:
1000 Megohms min.
- 2. Withstand Voltage:
1000V, AC/ minute
- 3. Durability:
600 mating circles min.
- 4. Tolerances unless otherwise specified:
0~10: ±0.1; 10~20: ±0.15;
20~30: ±0.2
- 5. Selective Gold-plating:
(3;6;15;30;50) micro inch

Shielding	1	Copper alloy with Nickel plated	0.25mm thickness	
Pin	64	Phosphor Bronze	Gold plating over Nickel	
Housing	1	PBT or NYLON	UL94V0 or 94V2	
Part Name	QTY	Materail	Remark	

Micro-Ray
Electronics, Inc.