


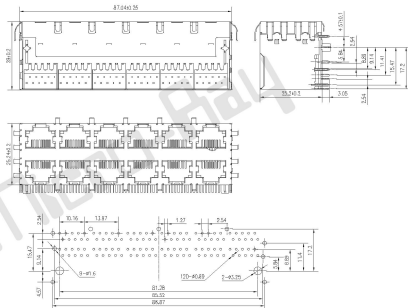

Specification

1. Insulation Resistance:
1000 Megohms min.
2. Withstand Voltage:
1000V, AC/minute
3. Durability:
600 mating cycles min.
4. Tolerances unless otherwise specified:
0 ~ 10: ± 0.1 ; 10 ~ 20: ± 0.15 ;
20 ~ 30: ± 0.2
5. Selective Gold-plating:
(35~150~50) micro inch

(4)				
(3)	Shielding	1	Copper alloy with Nickel plated	0.25mm thickness
(2)	Pin	96	Phosphor Bronze	Gold-plating over Nickel
(1)	Housing	1	PBT or NYLON	UL 94V0 or 94V2
No.	Part Name	QTY	Material	Remark

Micro-Ray
Electronics, Inc.