


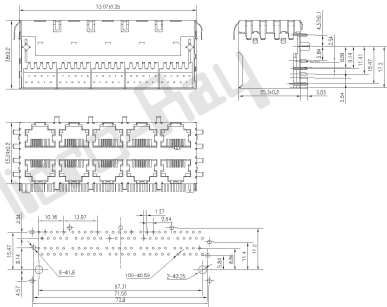

Specification

1. Insulation Resistance:
1000 Megohms min.
2. Withstand Voltage:
1000V, AC/minute
3. Durability:
600 rating cycles min.
4. Tolerances unless otherwise specified:
0 ~ 10: ± 0.1 ; 10 ~ 20: ± 0.15 ;
20 ~ 30: ± 0.2
5. Selective Gold-plating:
(3.6 ~ 15.24.50) micro inch

{4}				
{3}	Shielding	1	Copper alloy with Nickel plated	0.25mm thickness
{2}	Pin	80	Phosphor Bronze	Gold-plating over Nickel
{1}	Housing	1	PBT or NYLON	UL94V0 or 94V2
No.	Part Name	QTY	Material	Remark

Micro-Ray
Electronics, Inc.