
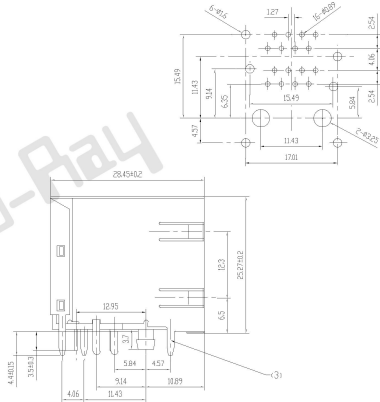





Specification

1. Insulation Resistance:
1000 Megohms min.
2. Withstand Voltage:
1000V, AC/ minute
3. Durability:
600 mating circles min.
4. Tolerances unless otherwise specified:
0~10: ± 0.1 ; 10~20: ± 0.15 ;
20~30: ± 0.2
5. Selective Gold-plating:
(3;6;15;30;50) micro inch

Shielding	1	Copper alloy with Nickel plated	0.25mm thickness
Pin	16	Phosphor Bronze	Gold plating over Nickel
Housing	1	P B T	UL94V0 or 94V2
Part Name	QTY	Material	Remark

Micro-Ray
Electronics, Inc.