


MR-59-22

(AJ-007-S)

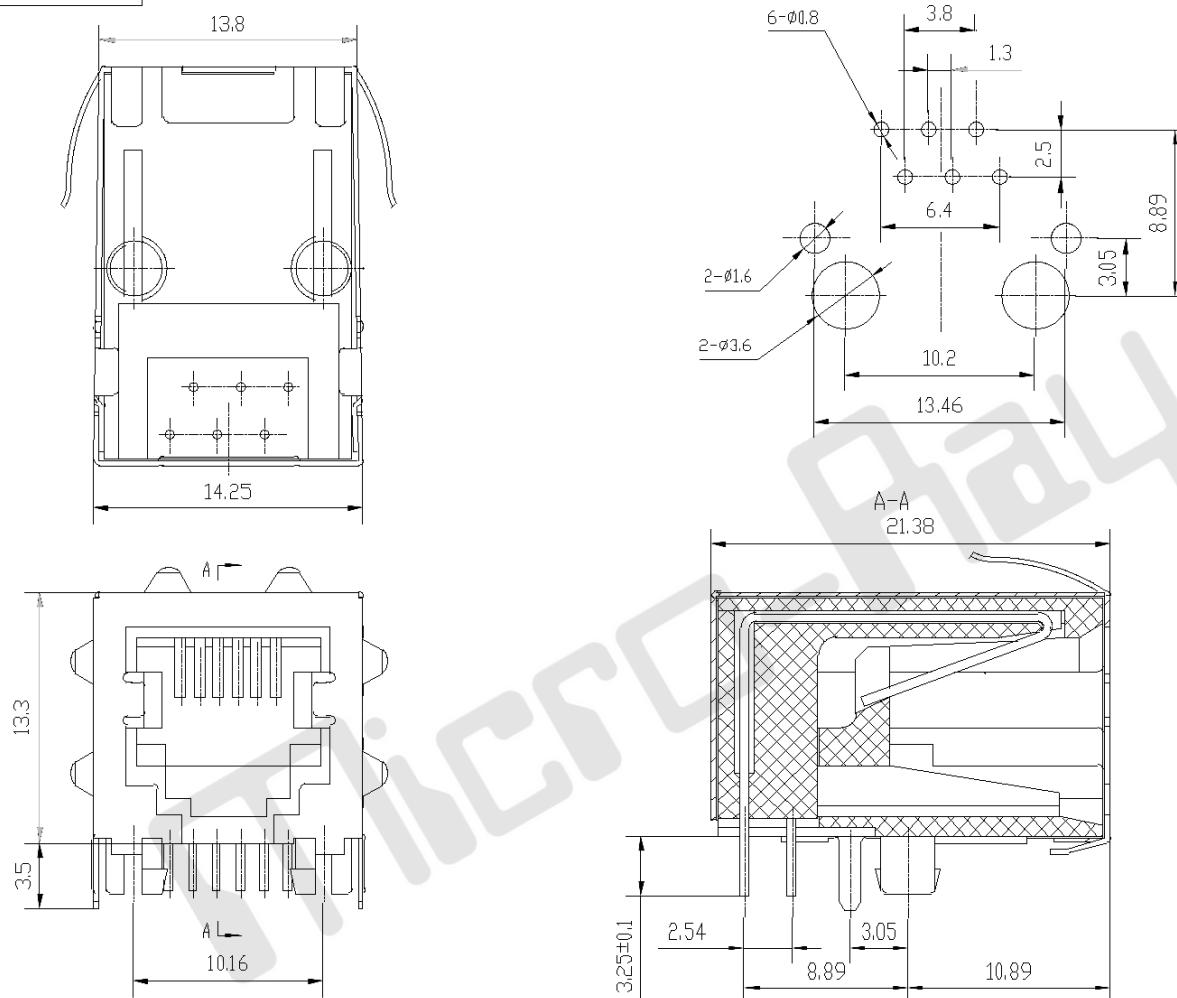

### Specification

1. Insulation Resistance:  
1000 Megohms min.
2. Withstand Voltage:  
1000V, AC/ minute
3. Durability:  
600 mating circles min.
4. Tolerances unless otherwise specified:  
0~10:  $\pm 0.1$ ; 10~20:  $\pm 0.15$ ;  
20~30:  $\pm 0.2$
5. Selective Gold-plating:  
(3;6;15;30;50) micro inch

|     |           |       |                                 |                          |
|-----|-----------|-------|---------------------------------|--------------------------|
| (4) |           |       |                                 |                          |
| (3) | Shielding | 1     | Copper alloy with Nickel plated | 0.25mm thickness         |
| (2) | pin       | 2;4;6 | Phosphor Bronze                 | Gold plating over Nickel |
| (1) | Housing   | 1     | P B T                           | UL94V0 or 94V2           |
| No. | Part Name | QTY   | Material                        | Remark                   |

Micro-Ray  
Electronics, Inc.