

Micro-Ray





RoHS

MR-A111989-G-XX-X

G:

Contact Area Plating
01: Au 1u"Min.
03: Au 3u"Min.
05: Au 5u"Min.
10: Au 10u"Min.
15: Au 15u"Min.
30: Au 30u"Min.

Packing Type
T:Tray
R:Tape & Reel

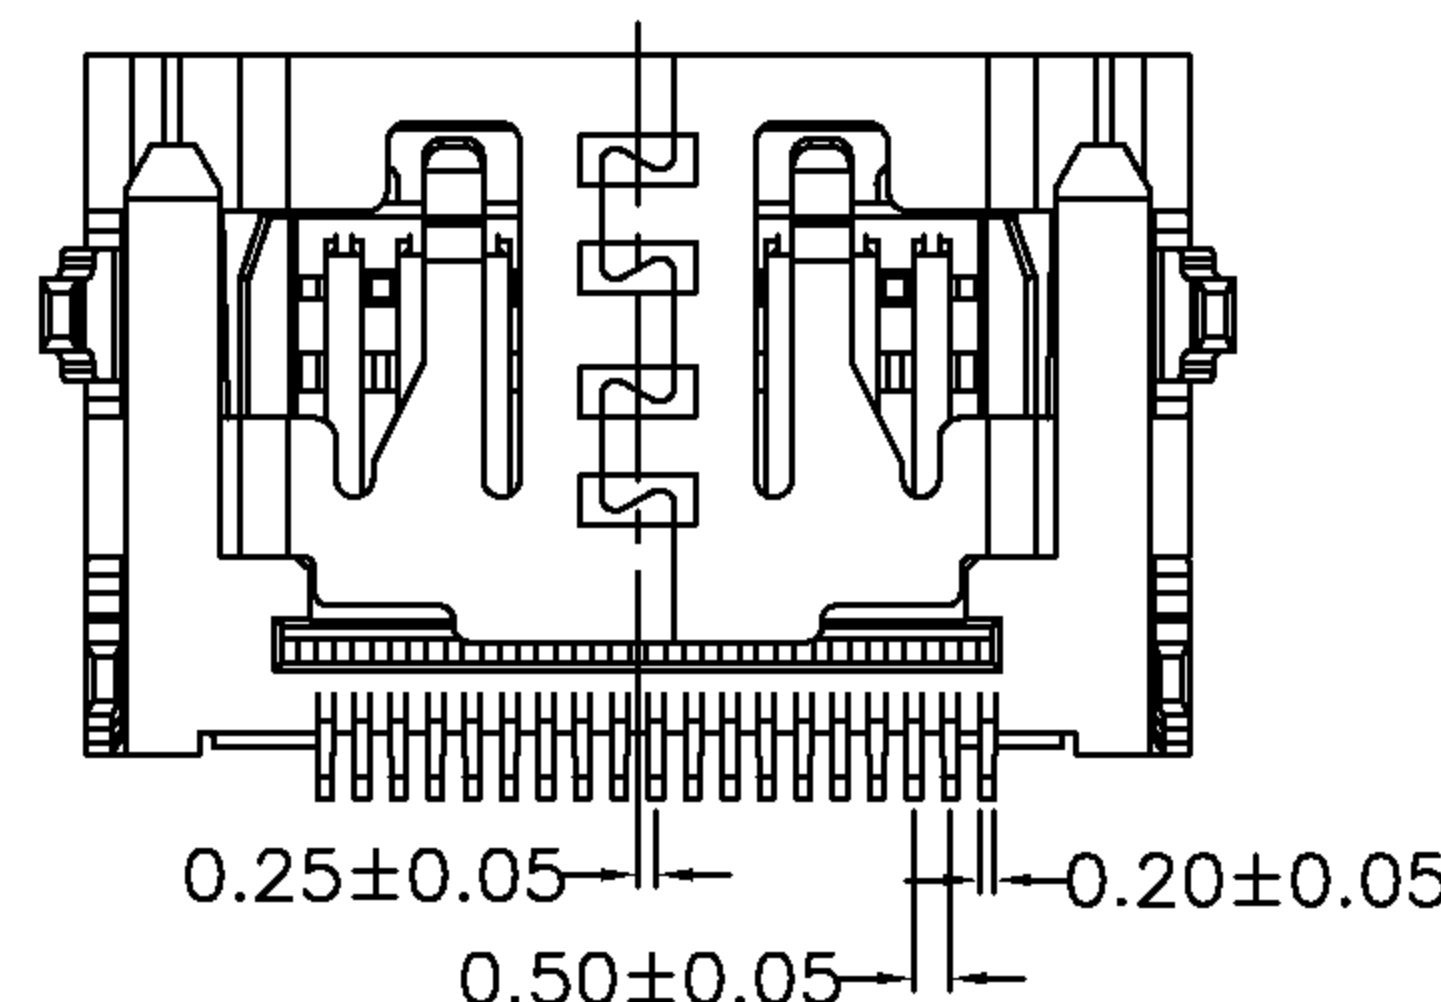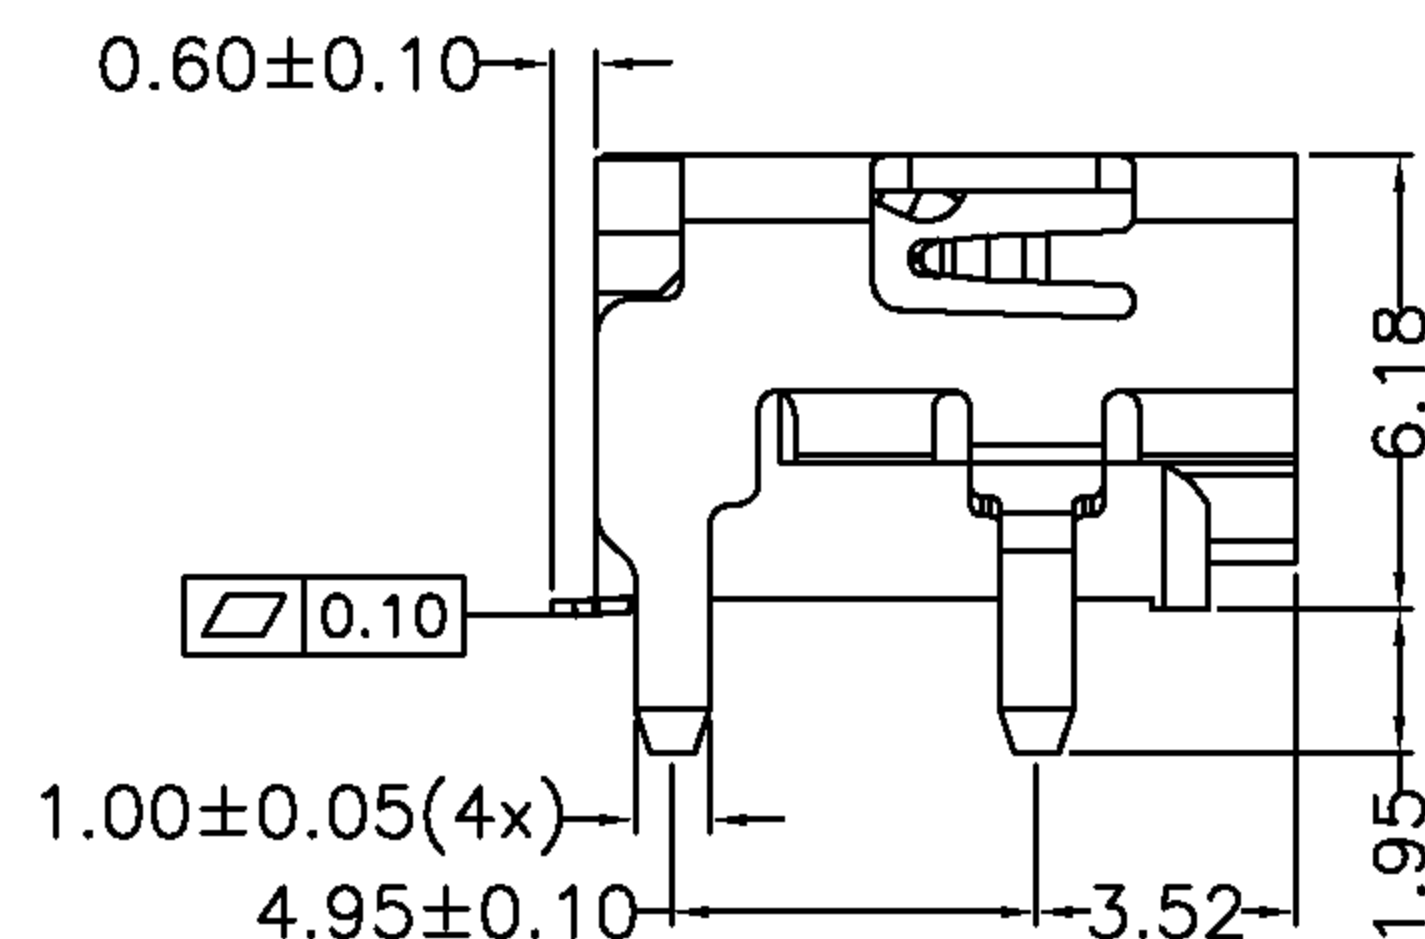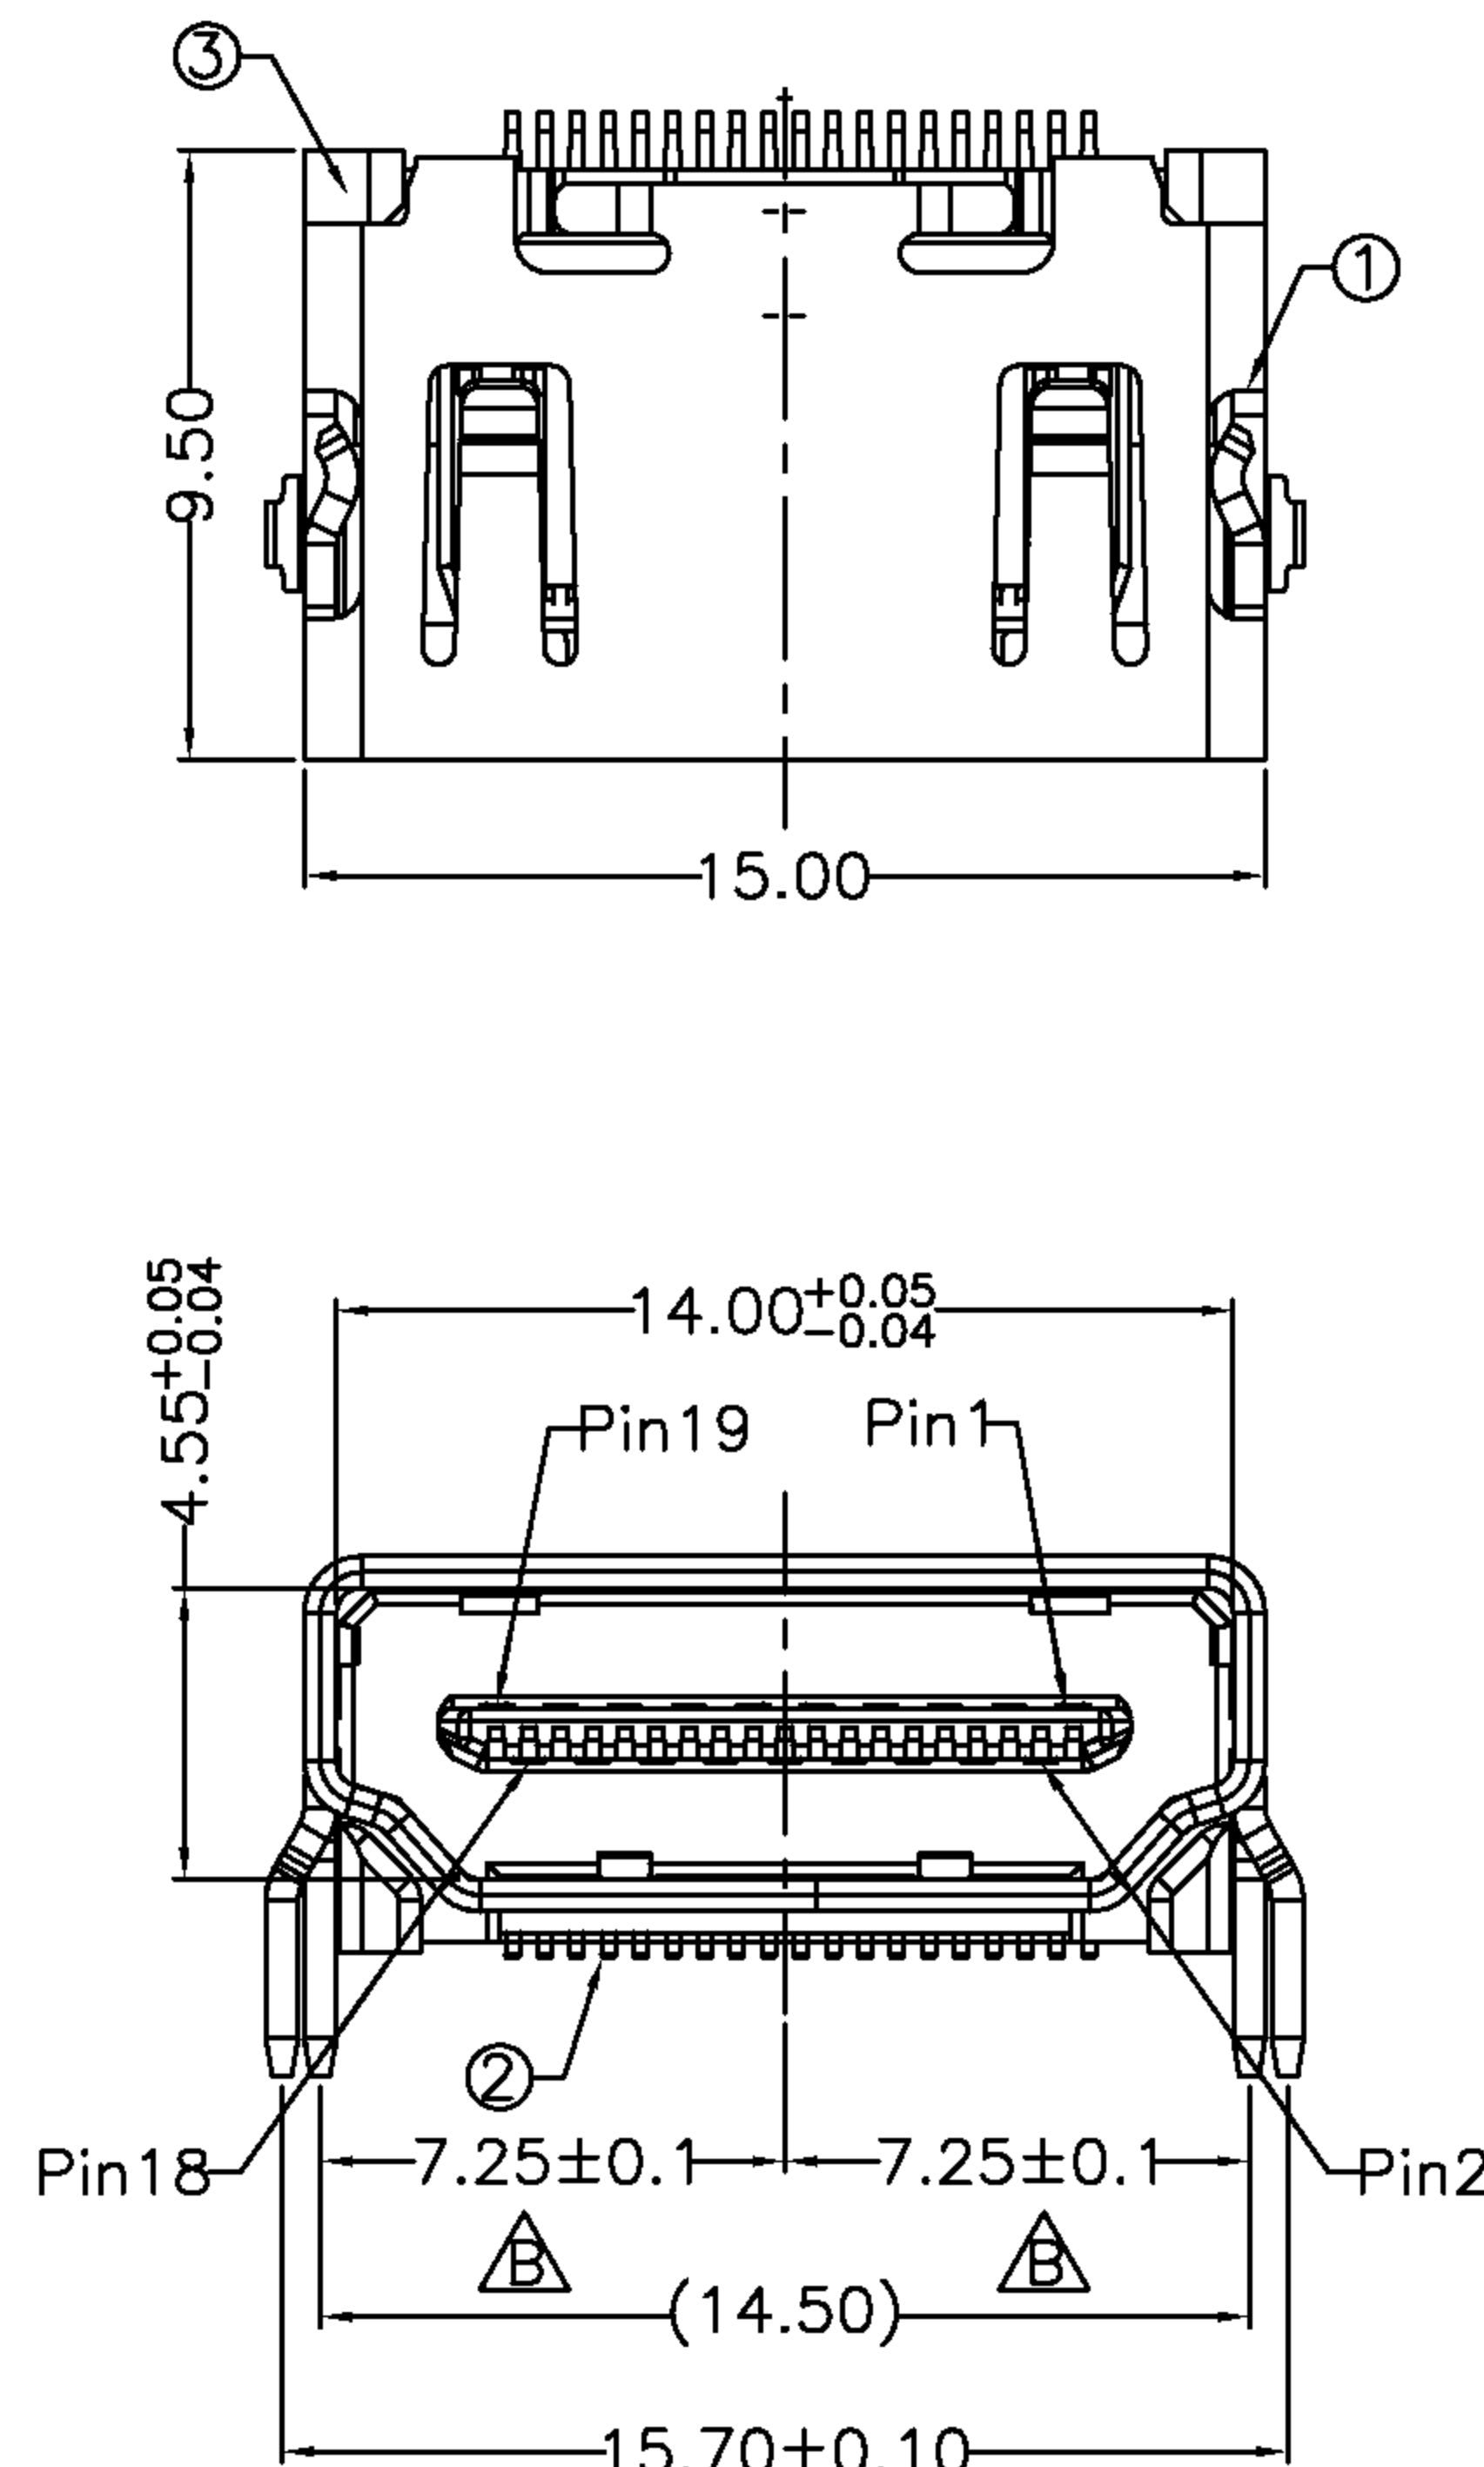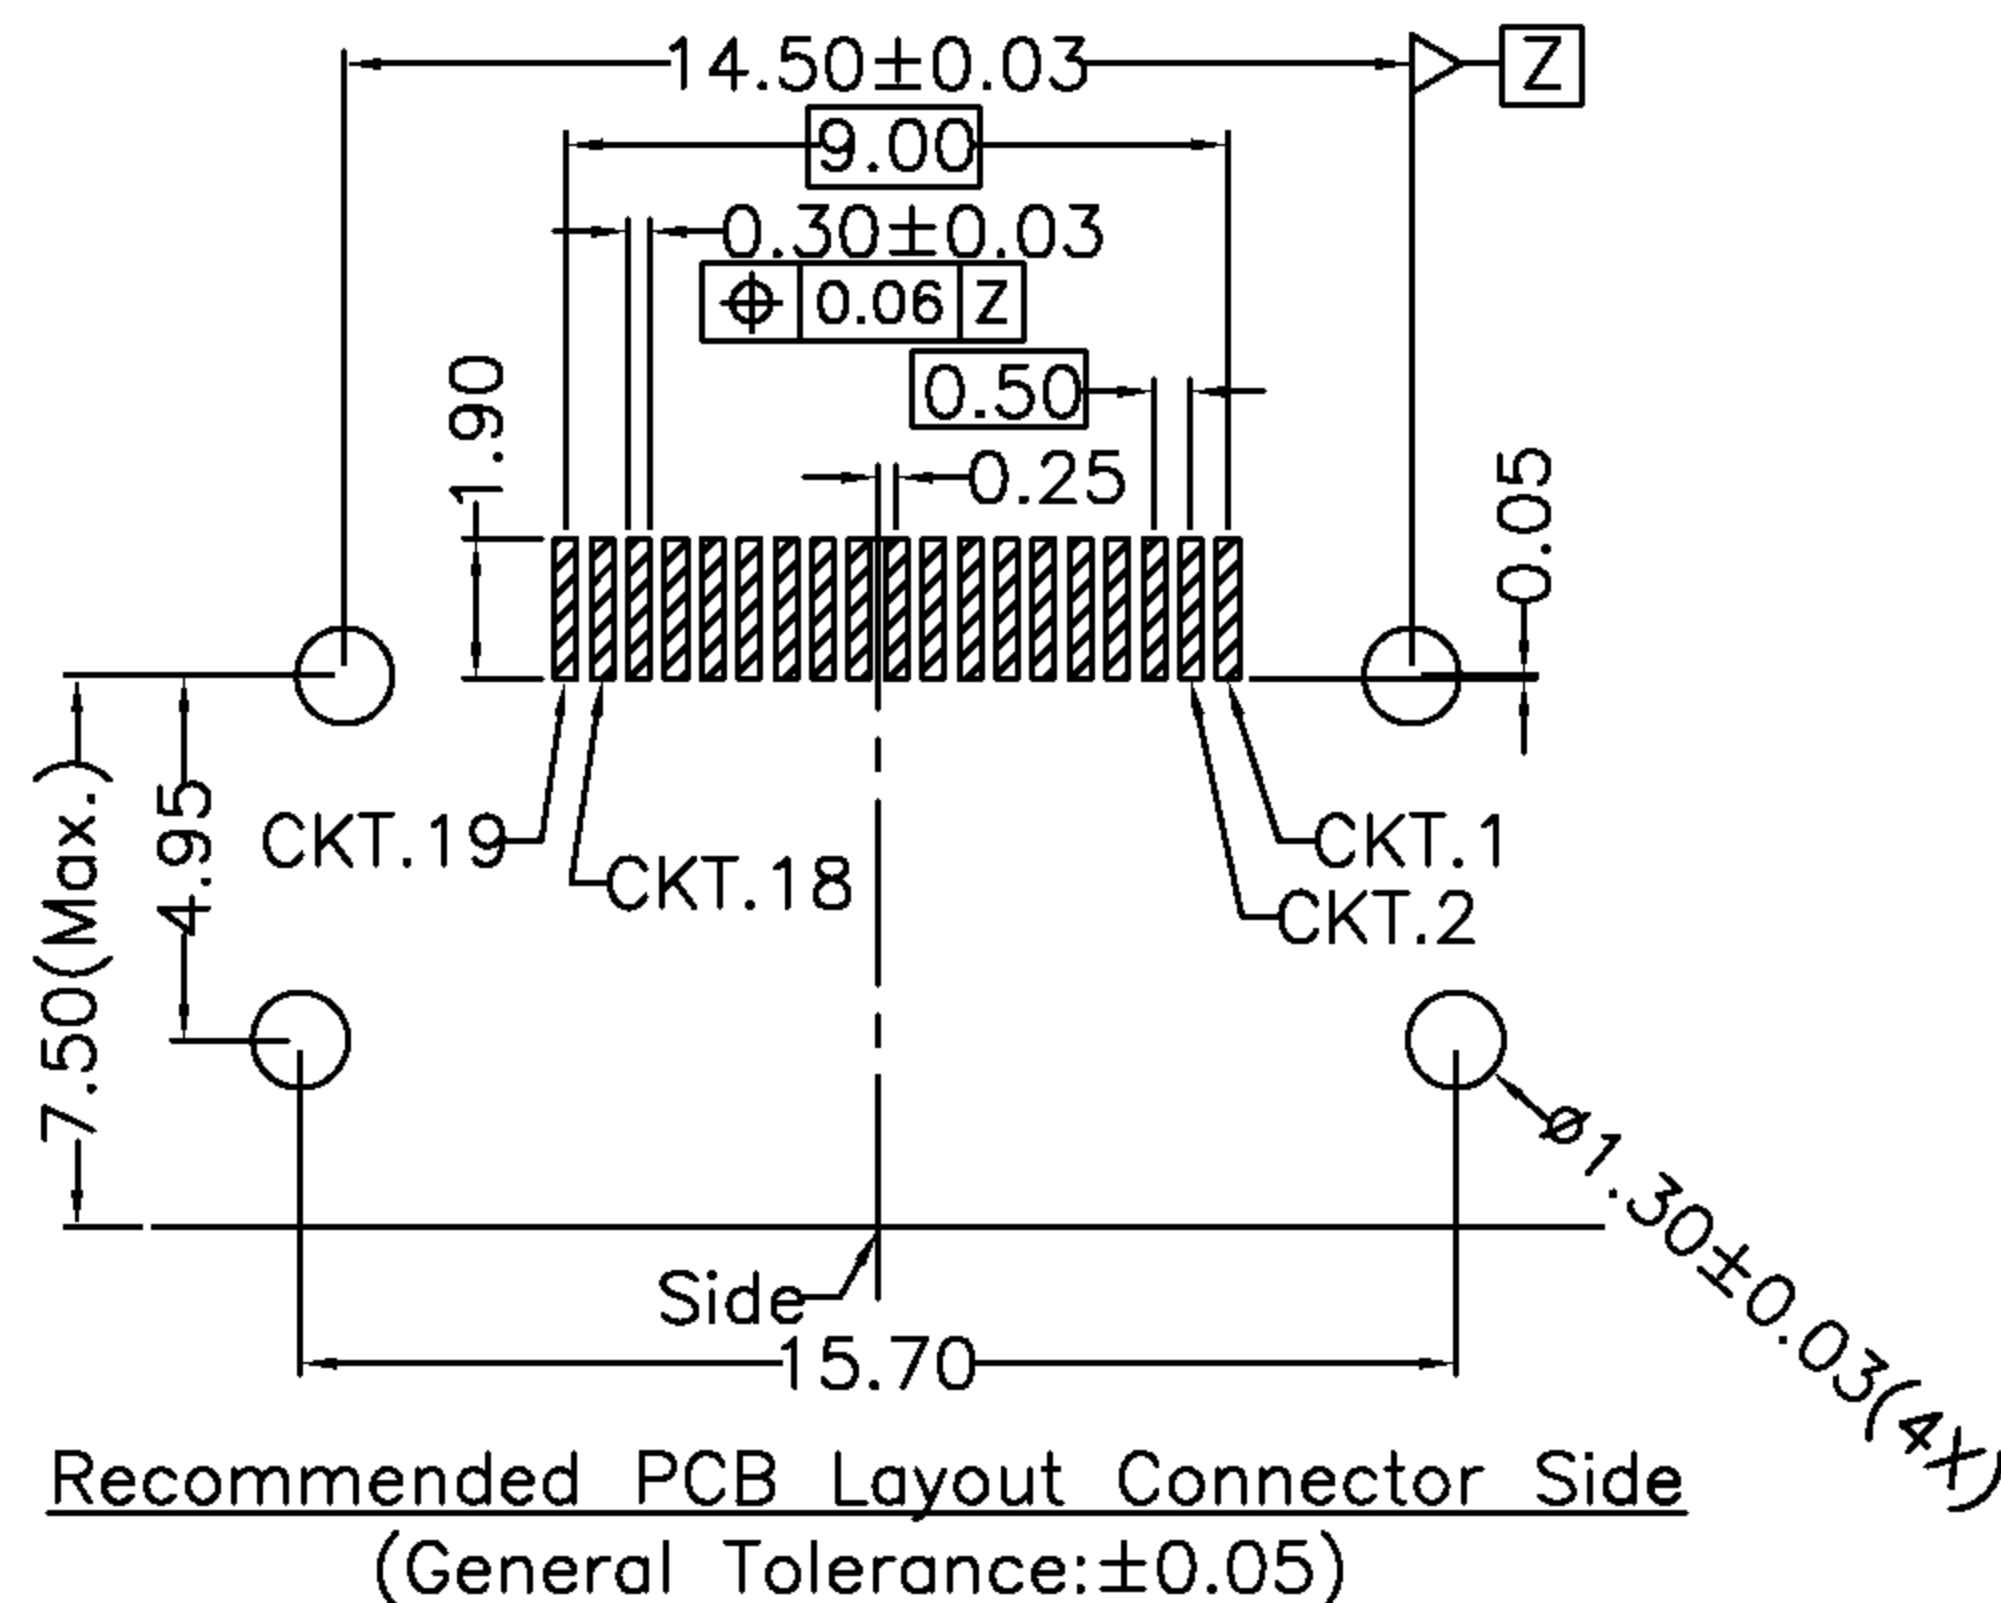

Item	Title	Material	Dispose	Remark
1	Shell	Brass t=0.50	Ni 50u"(min.)	
2	Terminal	Brass t=0.20	Mating Area:See P/N Solder Tails:Matte Tin	
3	InsertMolding	LCP	UL94V-0	Black

Electrical:
Rating Current: 0.5A
Rating Voltage: 40V
Contact Resistance: 10 Millohms Ohms Max
(Excluding Conductor Resistance)
Insulation Resistance:
a.Unmated: 100M Ohms Min at 500VDC
b.Mated: 10M Ohms Min at 150 VDC

REV	ECN NO	DESCRIPTION	DATE
B	TE2017-XXX	依客户要求更新尺寸公差	2017/08/24
A	TE2010-174	New Drawing	2010/03/18

X. ± 0.40	HDMI-A-19P-F/Short/No Screw InsertMold	Micro-Ray		
.X ± 0.30				
.XX ± 0.20				
.XXX ± 0.10				
X* ± 2.5*	DR: Cola Lee	PART NO: MR-A111989-G-XX-X		
.X* ± 2*		DWG NO: C-A111989-G(F)-XX-X	CUSTOMER DRAWING	SHEET:10F1
		UNITS: mm	SCALE: 3:1	REV: B