





MR-A2013 Series 2.00mm Pitch Series Wire to Board Connectors

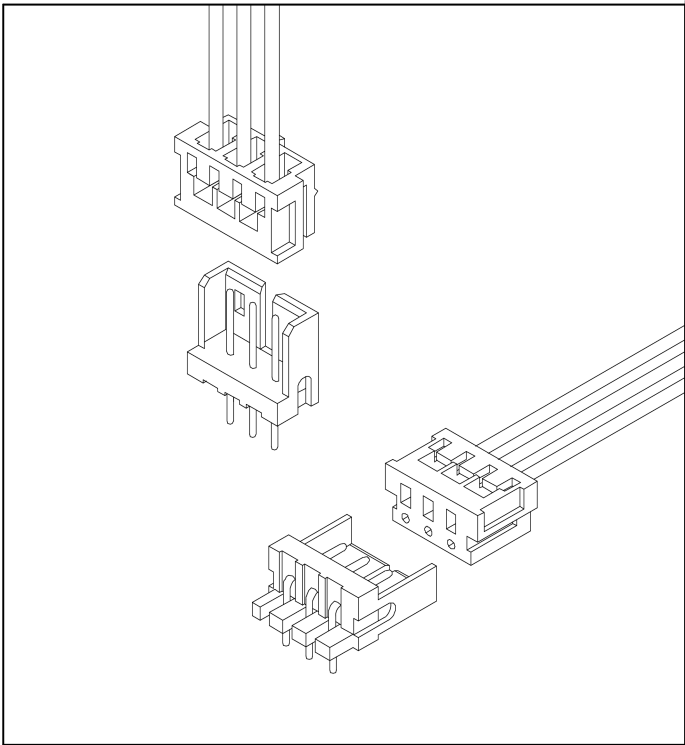





SPECIFICATIONS:

Voltage Rating: 125V AC/DC
Current Rating: 4A AC/DC
Withstanding Voltage: 1000V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 10mΩ Max.
Applicable Wire Range: AWG#22~26.

Assembly Layout:

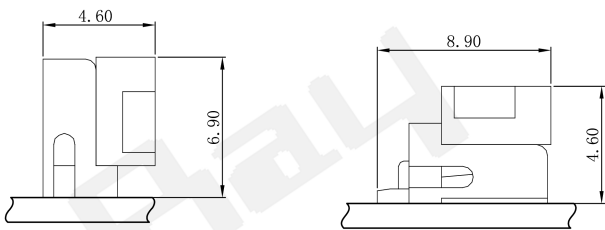

MR-A2013H-NP-N0NA 2.00mm Pitch Single Row Housing

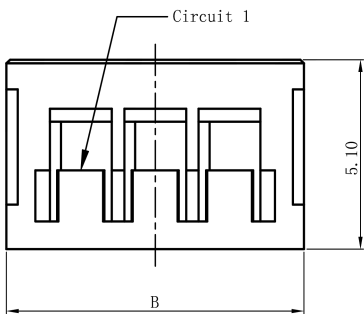

Reference Information:
*Material:
Housing: PA66 UL94V-0/Natural
*Suitable MR-A2013 series Terminal
*Mates with MR-A2013 series Wafer
Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
02	2.00	6.00	4.80
03	4.00	8.00	6.80
04	6.00	10.00	8.80
05	8.00	12.00	10.80
06	10.00	14.00	12.80
07	12.00	16.00	14.80
08	14.00	18.00	16.80
09	16.00	20.00	18.80
10	18.00	22.00	20.80
11	20.00	24.00	22.80
12	22.00	26.00	24.80
13	24.00	28.00	26.80
14	26.00	30.00	28.80
15	28.00	32.00	30.80






MR-A2013 Series 2.00mm Pitch Series Wire to Board Connectors

MR-A2013TF-PT1

2.00mm Pitch Terminal

Reference Information:
*Material: Phosphor Bronze/Tin-plated
*Mates with MR-A2013 series Housing

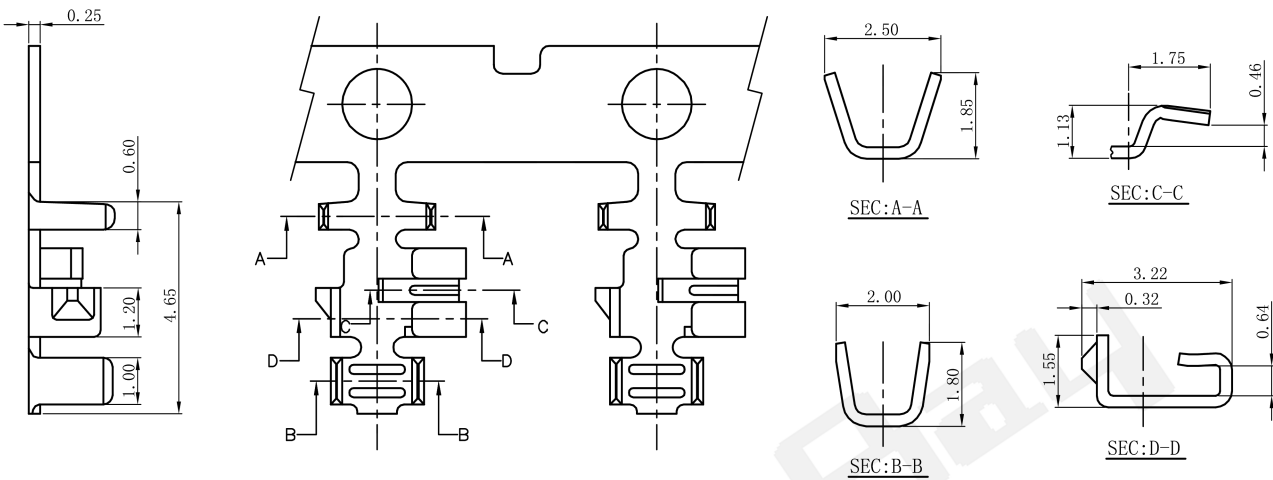


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MR-A2013TF-PT1	AWG#22-#26	1.50mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

MR-A2013WV-NP-N0WHT

2.00mm Pitch 180° Single Row Wafer

Reference Information:
*Material:
PIN: Brass/Tin-plated
Wafer: PA66,UL94V-0 / White
*Suitable MR-A2013 series Housing

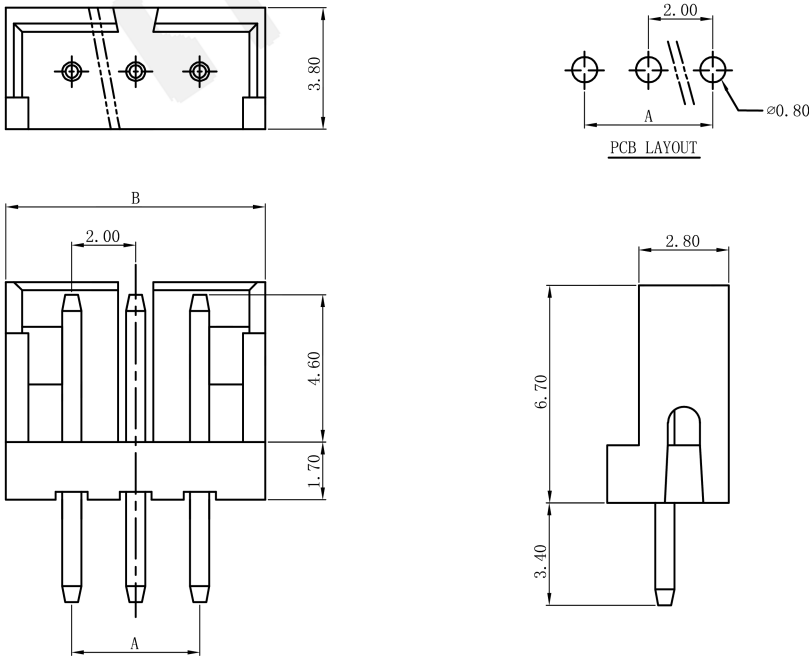

Poles	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00



TITLE 2.00mm PITCH WIRE-TO-BOARD CONNECTOR

SIZE A3

DWG NO MR-A2013

REV 0


SHEET 2



MR-A2013 Series 2.00mm Pitch Series Wire to Board Connectors

MR-A2013WR-NP-N0WHT

2.00mm Pitch 90° Single Row Wafer

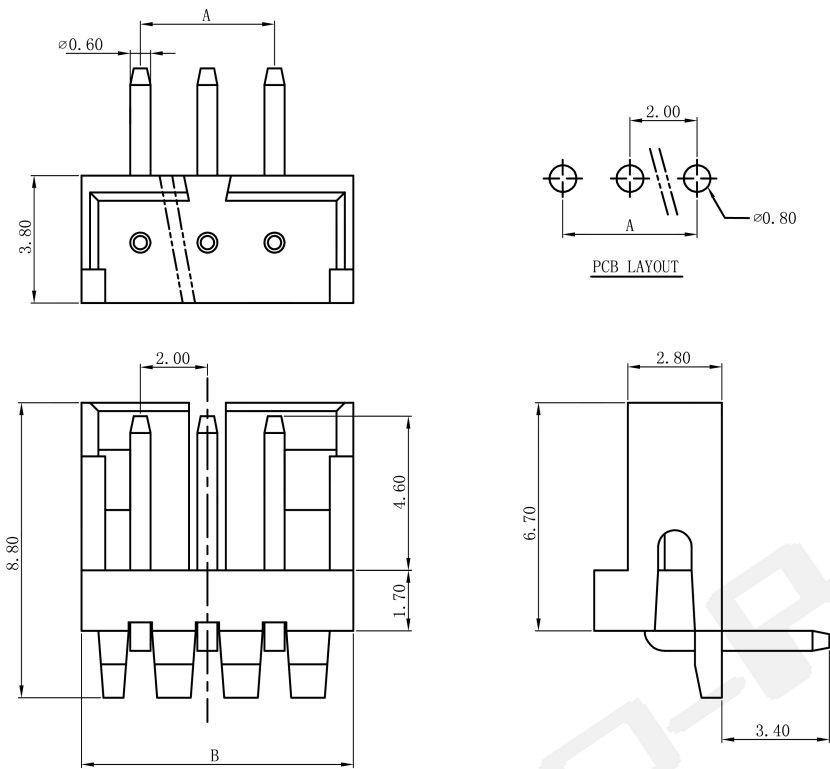

Reference Information:
*Material:
PIN: Brass/Tin-plated
Wafer: PA66,UL94V-0 / White
*Suitable MR-A2013 series Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00