





MR-A2549 Series 2.54mm Pitch Series Wire to Board Connectors

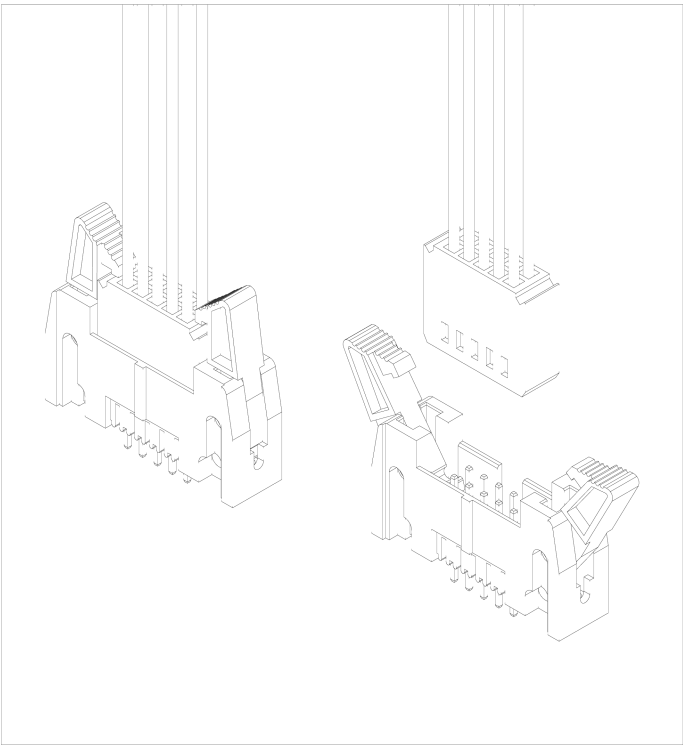

SPECIFICATIONS:


Voltage Rating: 250V AC/DC
Current Rating: 3A AC/DC
Withstanding Voltage: 800V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Applicable Wire Range: AWG#24~28.

Assembly Layout:

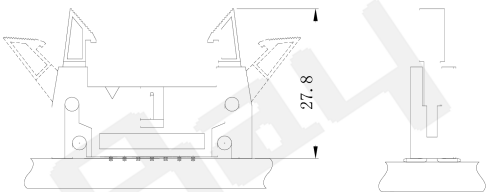

MR-A2549H-2NP-N2BK 2.54mm Pitch Dual Row Housing

Reference Information:
*Material:
Housing: PA66 UL94V-2/Black
*Suitable MR-A2549 series Terminal
Ordering Information & Dimensions

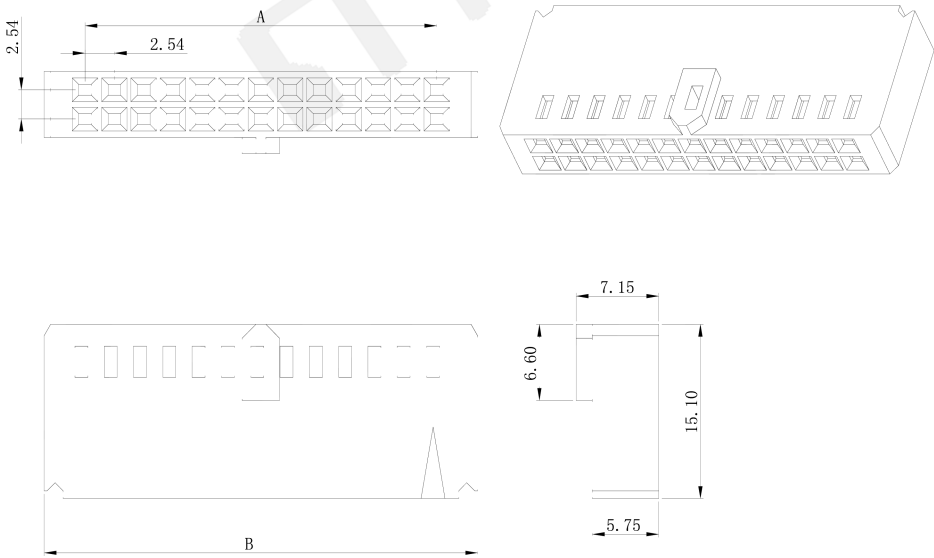

Poles	Dimensions (mm)	
	A	B
2*2P	2.54	9.76
2*3P	5.08	12.30
2*4P	7.62	14.84
2*5P	10.16	17.38
2*6P	12.70	19.92
2*7P	15.24	22.46
2*8P	17.78	25.00
2*9P	20.32	27.54
2*10P	22.86	30.08
2*11P	25.40	32.62
2*12P	27.94	35.16
2*13P	30.48	37.70
2*14P	33.02	40.24
2*15P	35.56	42.78
2*16P	38.10	45.32
2*17P	40.64	47.86
2*18P	43.18	50.40
2*19P	45.72	52.94
2*20P	48.26	55.48








MR-A2549 Series 2.54mm Pitch Series Wire to Board Connectors

MR-A2549TF-PT1

2.54mm Pitch Terminal

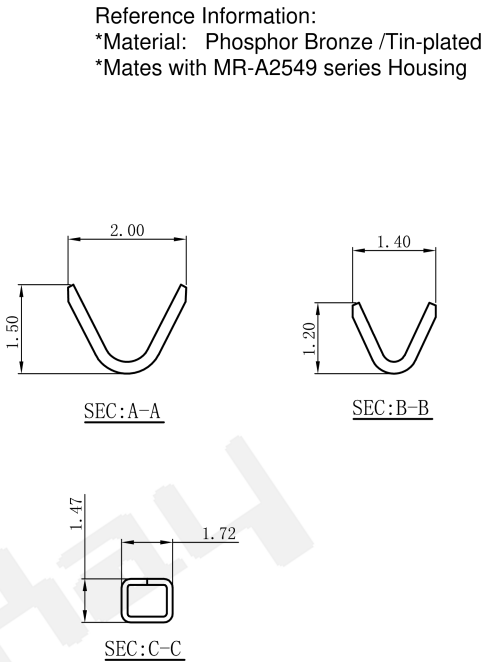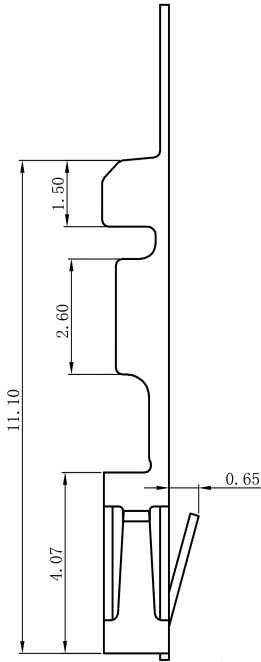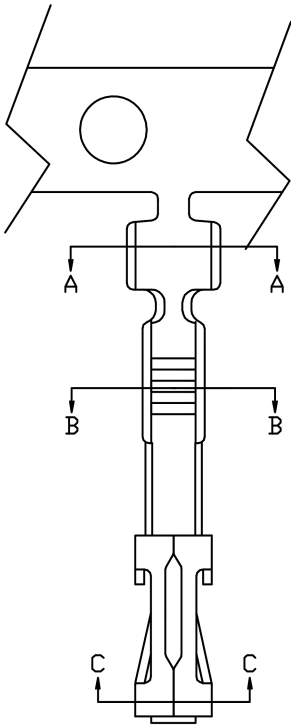

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MR-A2549TF-PT1	AWG#24-#28	1.60mm(max)	Phosphor Bronze	Tin-plated	10,000pcs



TITLE 2.54mm PITCH WIRE-TO-BOARD CONNECTOR

SIZE A3

DWG NO MR-A2549

REV 0

SHEET 2