



Nickel Plated Brass
MR-GQ8F-D/△/▲/N



Nickel Plated Brass
MR-GQ12F-D/△/▲/N

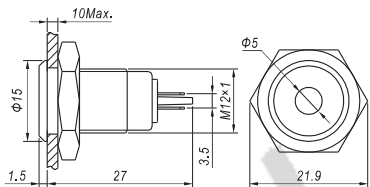

- ⦿ Lamp Color(△): **R** **G** **Y** **B** **W**
- ⦿ Lamp Voltage(▲): 6V, 12V, 24V, 110V(with external resistor), 220V(with external resistor)
- ⦿ Mounting Hole Diameter: Φ8, Φ12mm
- ⦿ Lamp type: LED
- ⦿ Rated Current: 2mA~20mA
- ⦿ Mounting Nut Torque: About 0.1Nm
- ⦿ Panel Thickness: 10mm Max.
- ⦿ Terminal: Solder Lug (2.8x0.5mm)
- ⦿ Soldering Temperature: 320°C 3s
- ⦿ Body Material: Nickel Plated Brass
- ⦿ Base: PBT
- ⦿ IP Rating: IP67; IK06(Flat round type only)
- ⦿ RoHS can be Customized

MR-GQ8,GQ12 Indicator
Specifications

PART NUMBERS ON THIS DRAWING
MR-GQ12F-D MR-GQ8F-D

METAL INDICATOR LIGHT		Micro-Ray	
MR-GQ8F/GQ12F SERIES			
PART NO	MR-GQ8F/GQ12F		
DWG NO	MR-GQ8F/GQ12F	SHEET 1 OF 1	REV A
UNITS: mm	SCALE: NTS - DO NOT SCALE	SIZE A4	DATE 2026-09-22