




Contact Structure ☐ 11: 1NO1NC / 22: 2NO2NC
Operation type ☒ Z: Latching / No letter means momentary
Housing Material S: Stainless steel
Protection class IP65(IP67 can be customized),IK09
Applicable accessories Safety mask M12-22F / Solder socket S04 / PCB socket S05 / safety mask T21-22

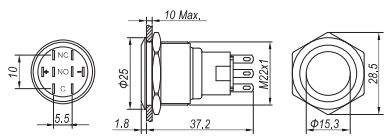


Contact Structure ☐ 11: 1NO1NC / 22: 2NO2NC
Operation type ☒ Z: Latching / No letter means momentary
Color ☒ R G Y B W
Voltage ☒ 6V/12V/24V/110V/220V
Housing Material S: Stainless steel
Protection class IP65(IP67 can be customized),IK09
Applicable accessories Safety mask M12-22F / Solder socket S04 / PCB socket S05 / safety mask T21-22

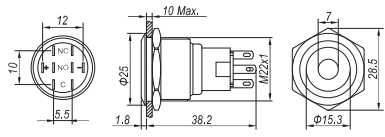


Contact Structure ☐ 11: 1NO1NC / 22: 2NO2NC
Operation type ☒ Z: Latching / No letter means momentary
Color ☒ R G Y B W
Voltage ☒ 6V/12V/24V/110V/220V
Housing Material S: Stainless steel
Protection class IP65(IP67 can be customized),IK09
Applicable accessories Safety mask M12-22F / Solder socket S04 / PCB socket S05 / safety mask T21-22

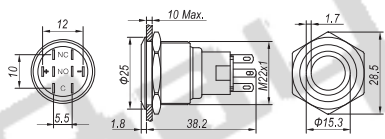

Contact Structure ☐ 11: 1NO1NC / 22: 2NO2NC
Operation type ☒ Z: Latching / No letter means momentary
Color ☒ R G Y B W
Voltage ☒ 6V/12V/24V/110V/220V
Housing Material S: Stainless steel
Protection class IP65(IP67 can be customized),IK09
Applicable accessories Solder socket S04 / PCB socket S05

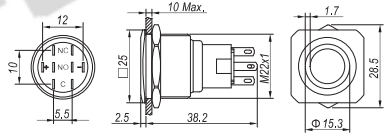


Contact Structure ☐ 11: 1NO1NC / 22: 2NO2NC
Operation type ☒ Z: Latching / No letter means momentary
Color ☒ R G Y B W
Voltage ☒ 6V/12V/24V/110V/220V
Housing Material S: Stainless steel
Protection class IP65(IP67 can be customized),IK09
Applicable accessories Safety mask M12-22F / Solder socket S04 / PCB socket S05 / safety mask T21-22

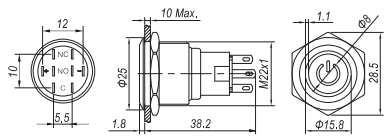


PART NUMBERS ON THIS DRAWING
MR-LAS1-AGQ22 MR-LAS1-AGQ22-D MR-LAS1-AGQ22-E MR-LAS1-AGQ22-ET MR-LAS1-AGQ22-TSB
MR-LAS1-AGQ22-TSC MR-LAS1-AGQ22-TSD MR-LAS1-AGQ22-X MR-LAS1-AGQ22-Y MR-LAS1-AGQ22S-E

22 MM SNAP-ACTION METAL PUSH BUTTON		Micro-Ray	
MR-LAS1-AGQ22 SERIES			
PART NO	MR-LAS1-AGQ22		
DWG NO	MR-LAS1-AGQ22	SHEET 1 OF 3	REV A
UNITS: mm	SCALE: NTS - DO NOT SCALE	SIZE A4	DATE 2026-09-22


Contact Structure ☐ 11: 1NO1NC / 22: 2NO2NC
Housing Material Aluminum alloy
Protection class IP65,IK02
Applicable accessories Solder socket S04 / PCB socket S05 / Safety mask T16

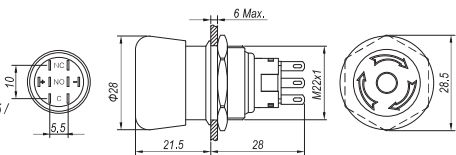

Contact Structure ☐ 11: 1NO1NC / 22: 2NO2NC
Housing Material Aluminum alloy
Protection class IP65,IK02
Applicable accessories Solder socket S04 / PCB socket S05 / Safety mask T16

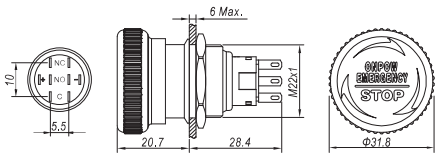


Contact Structure ☐ 11: 1NO1NC / 22: 2NO2NC
Housing Material Aluminum alloy
Protection class IP65,IK02
Applicable accessories Solder socket S04 / PCB socket S05 / Safety mask T16

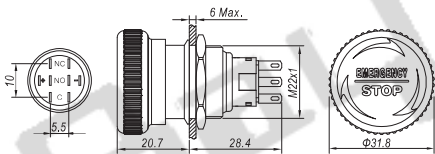

Precautions

- During the use of the push-lock and release button, the product is likely to rotate. It is recommended that the user refer to the figure on the right to make the groove.
- If necessary, the user can choose whether to reinforce the head of the product, please consult the sales staff for details.

Slot size



PART NUMBERS ON THIS DRAWING
MR-LAS1-AGQ22 MR-LAS1-AGQ22-D MR-LAS1-AGQ22-E MR-LAS1-AGQ22-ET MR-LAS1-AGQ22-TSB
MR-LAS1-AGQ22-TSC MR-LAS1-AGQ22-TSD MR-LAS1-AGQ22-X MR-LAS1-AGQ22-Y MR-LAS1-AGQ22S-E

22 MM SNAP-ACTION METAL PUSH BUTTON
MR-LAS1-AGQ22 SERIES



PART NO MR-LAS1-AGQ22

DWG NO MR-LAS1-AGQ22

UNITS: mm SCALE: NTS - DO NOT SCALE


SHEET 2 OF 3

REV A


SIZE A4

DATE 2026-09-22

Contact Structure □ 11: 1NO1NC / 22: 2NO2NC
Operating position ◆ ● L R L C R
Color △ R G Y B W
Voltage ▲ 6V/12V/24V/110V/220V
Housing Material ○ Stainless steel
Protection class IP65, IK09
Applicable accessories Solder socket S04 / PCB socket S05

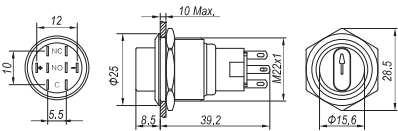

Contact Structure □ 11: 1NO1NC / 22: 2NO2NC
Operating position ◆ ● L R L C R
Housing Material ○ Stainless steel
Protection class IP40(IP65 can be customized), IK09
Applicable accessories Solder socket S04 / PCB socket S05

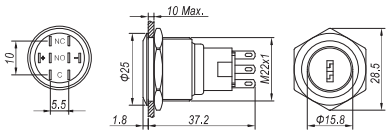


Knob, key button working position contact status	Switch type	90° 2 position		45° 3 position	
	Action position	1NO1NC	2NO2NC	2NO2NC	

Precautions

- The key button comes with 2 keys as standard.
- The knob and key button must be rotated in place when using.
- During the use of the knob and key button, the product is likely to rotate. It is recommended that the user refer to the figure on the right to make the groove.

Slot size



PART NUMBERS ON THIS DRAWING
MR-LAS1-AGQ22 MR-LAS1-AGQ22-D MR-LAS1-AGQ22-E MR-LAS1-AGQ22-ET MR-LAS1-AGQ22-TSB
MR-LAS1-AGQ22-TSC MR-LAS1-AGQ22-TSD MR-LAS1-AGQ22-X MR-LAS1-AGQ22-Y MR-LAS1-AGQ22S-E

22 MM SNAP-ACTION METAL PUSH BUTTON				
MR-LAS1-AGQ22 SERIES				
PART NO	MR-LAS1-AGQ22			
DWG NO	MR-LAS1-AGQ22		SHEET 3 OF 3	REV A
UNITS: mm		SCALE: NTS - DO NOT SCALE	SIZE A4	DATE 2026-09-22