
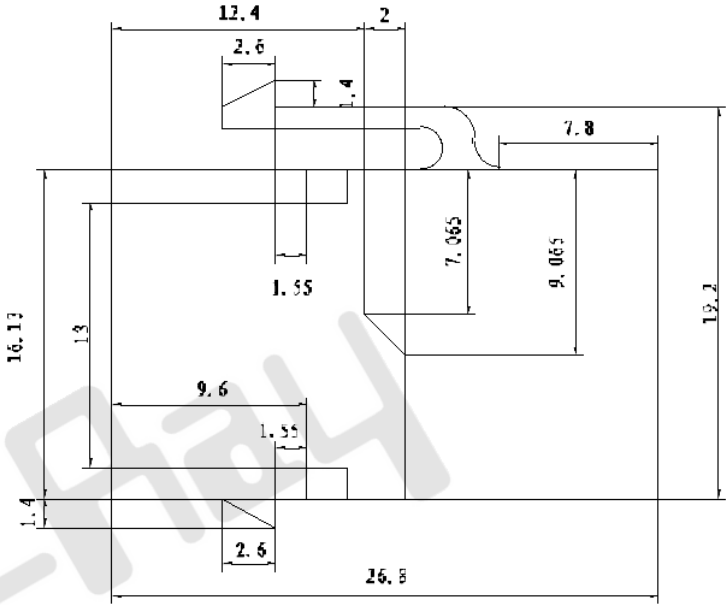
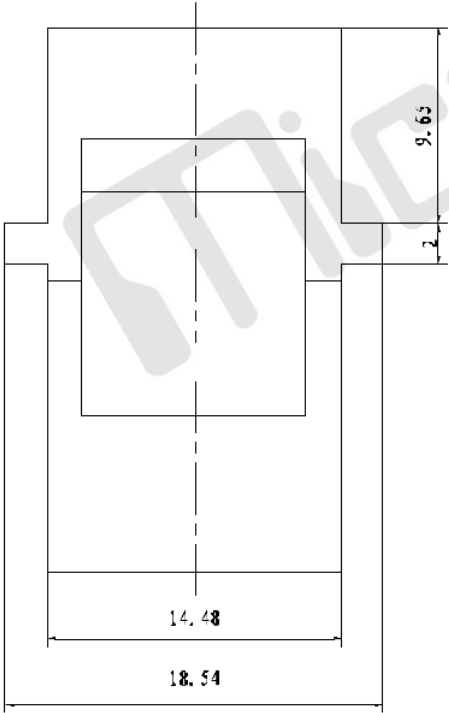


MR-NET-09  
COUPLER (6P, 4P)

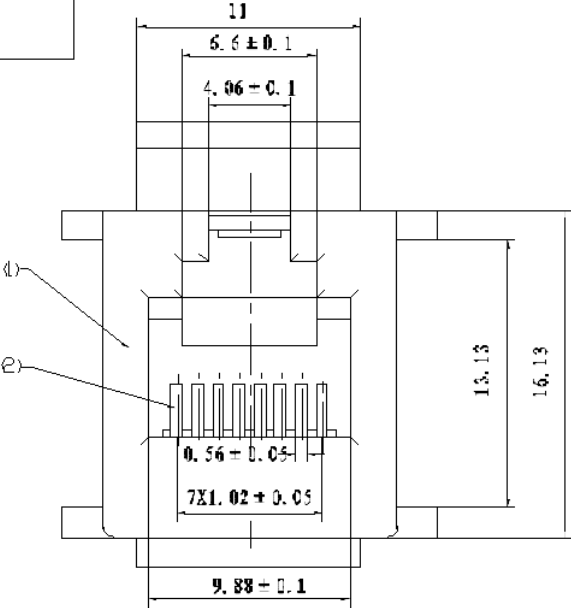

Specification

- 1. Insulation Resistance:  
1000 Megohms min.
- 2. Withstand Voltage:  
1000V, AC/minute
- 3. Durability:  
600 mating cycles min.
- 4. Tolerances unless otherwise specified:  
0~10: ±0.1; 10~20: ±0.15;  
20~30: ±0.2
- 5. Selective Gold-plating  
(3;6;15;30;50 ) micro inch

|     |           |     |                 |                          |
|-----|-----------|-----|-----------------|--------------------------|
| (4) |           |     |                 |                          |
| (3) |           |     |                 |                          |
| (2) | pin       | 2;4 | Phosphor Bronze | Gold plating over Nickel |
| (1) | Housing   | 1   | A B S           | UL94V0 or 94V2           |
| No. | Part Name | QTY | Material        | Remark                   |

Micro-Ray  
Electronics, Inc.