



MR-NET-43-A
24ports

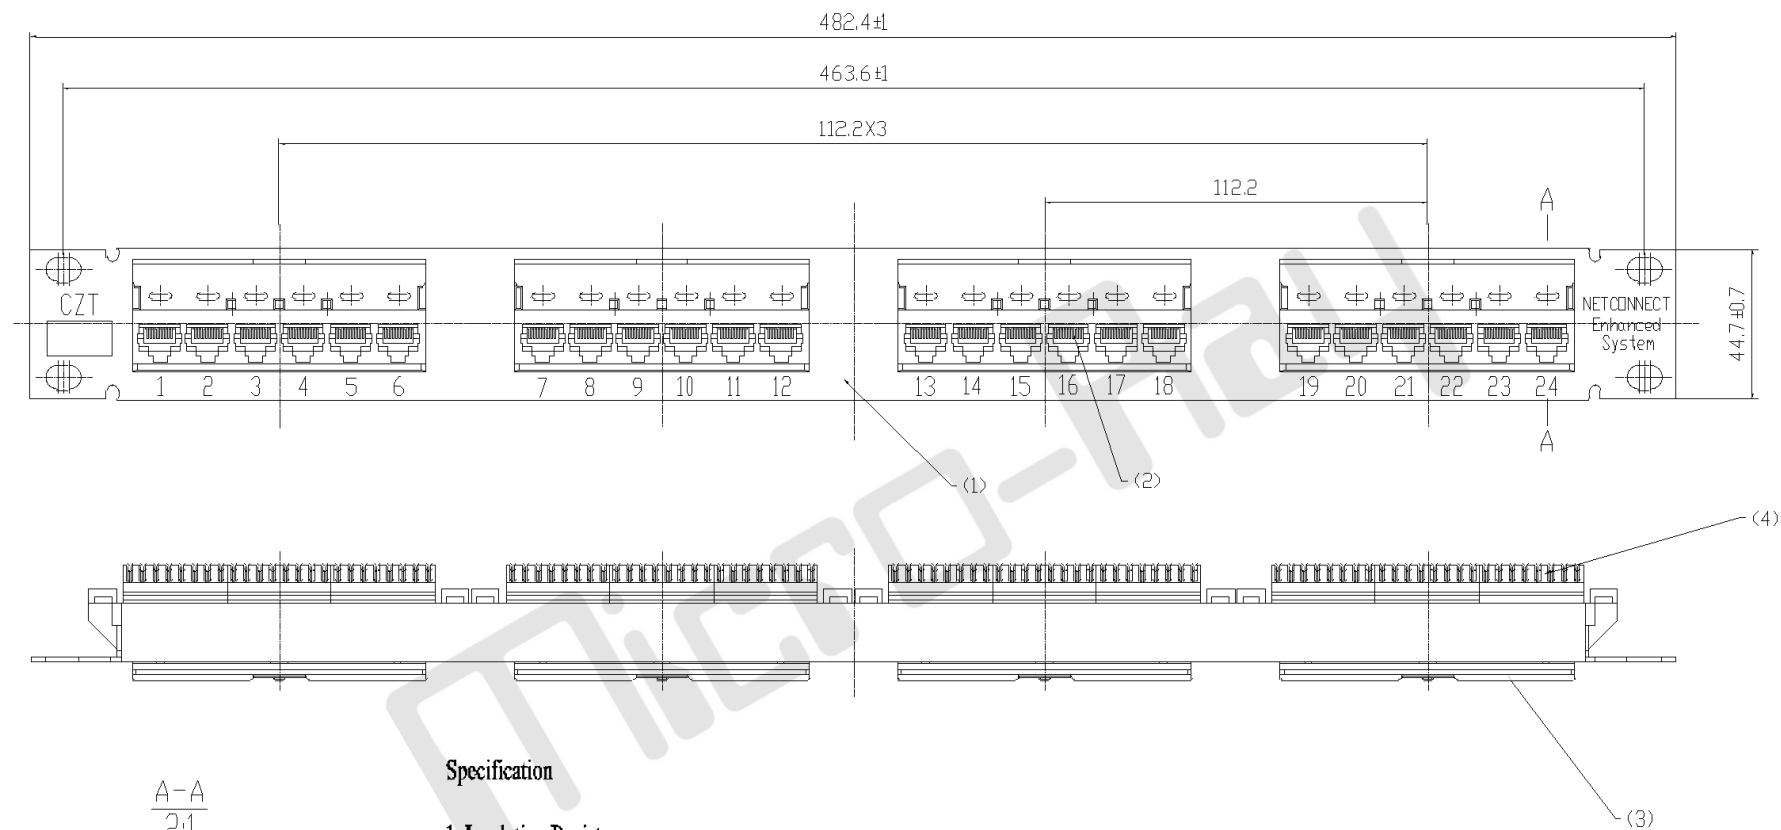

A-A
2:1

Specification

1. Insulation Resistance:
1000 Megohms min.
2. Withstand Voltage:
1000V, AC/ minute
3. Durability:
600 mating circles min.
4. Tolerances unless otherwise specified:
0~10: ±0.1; 10~20: ±0.15;
20~30: ±0.2
5. Selective Gold-plating:
(3;6;15;30;50) micro inch



(5)	Plugboard	4		
(4)	Quickset	24	PC ,Phosphor bronze	
(3)	Fixity	4	A B S	UL94V0 or 94V2
(2)	pin	192	Phosphor Bronze	Gold-plating over Nickel
(1)	Fixture	1	Iron	
No.	Part Name	QTY	Materail	Remark

Micro-Ray
Electronics, Inc.