


DIMENSIONS (mm)

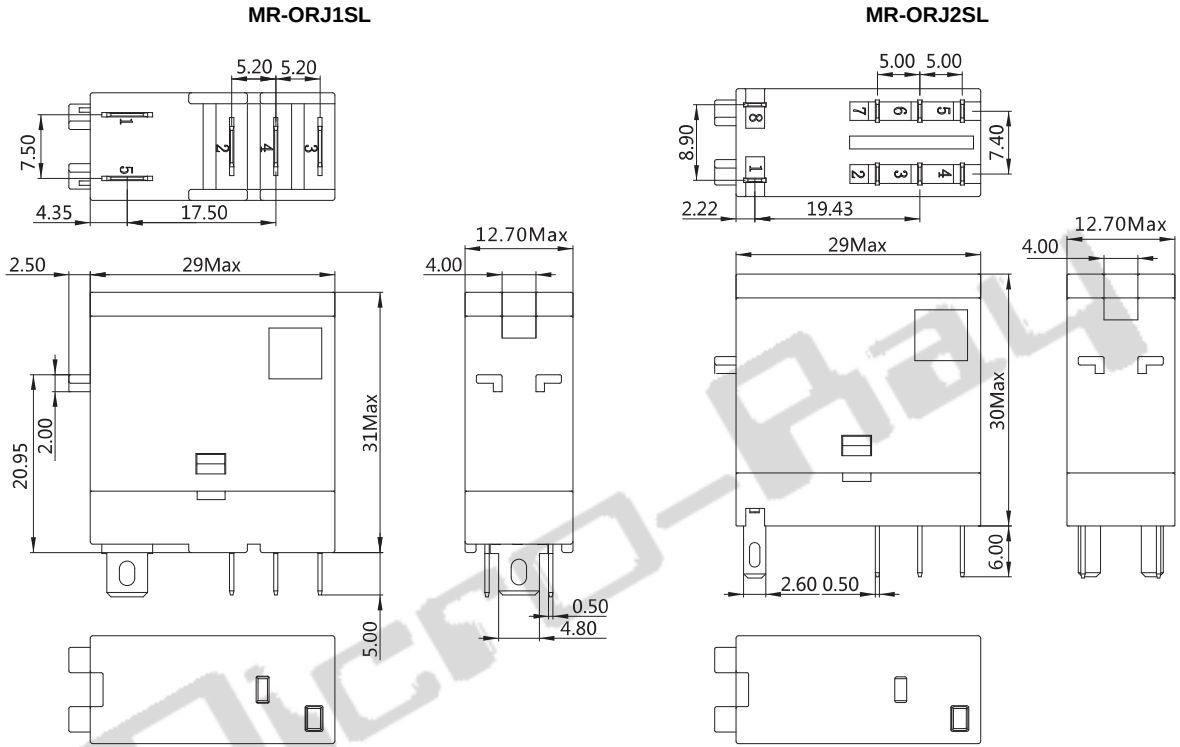


COIL RATINGS (23°C)

Rated Voltage V.DC	6	12	24	36	48	100~110	
Coil resistance Ω	68	270	1080	2440	4300	18800	
Rated Voltage V.AC	6	12	24	48	115	230	240
Coil resistance Ω	16	62	240	1080	6000	23000	25000

Note: Coil resistance tolerance: Nominal value of coil rated voltage < 110V±10% Ω , ≥ 110V±15% Ω .

NOTE: ALL DIMENSIONS IN mm.

CONNECTING DIAGRAM

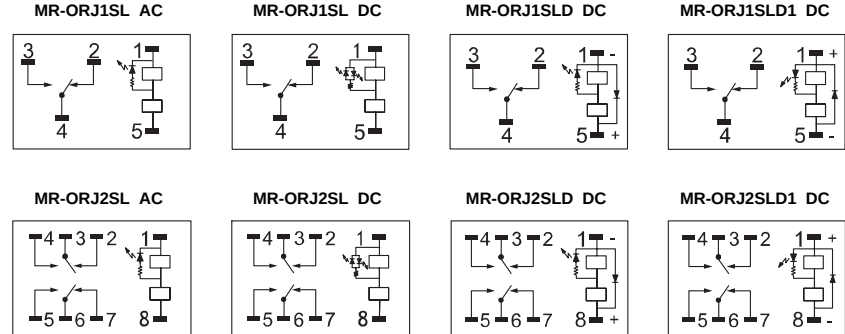

PART NUMBER	DESCRIPTION
MR-ORJ1SL	1 changeover, 5 pins, LED
MR-ORJ2SL	2 changeover, 8 pins, LED

SLIM PLUG-IN RELAY 1 OR 2 CHANGEOVER, 12 A / 8 A, LED OPTION		Micro-Ray	
PART NO	MR-ORJ		
DWG NO	MR-ORJ	SHEET 1 OF 1	REV A
UNITS: mm	SCALE: NTS - DO NOT SCALE	SIZE A4	DATE 2026-09-22