

FEATURES AND SPECIFICATIONS

Features and benefits

- Into pcb contact
- Into Transformer and LED

Physical

■Material:

Contact :Phosphor alloy T=0.35mm
Housing : LCP UL94V-0 Color :Black
Shell: Brass alloy

■Finish:

Contact:6u" Min gold plating on contact area.
50u" nickel under plated all over shell


Electrical

Voltage rating :125 V
Current rating: 0.2 A
Dielectric strength :1500VAC For 1minute Min
Insulation resistance: 500 MEG OHM Min
Contact resistance:20 MILL.OHM Max

Mechanical

Insertion force : 22N Max
Durability:750 times
Operating temperature :-25℃~+85℃


RJ45 8.45H WITH Transformer and LED

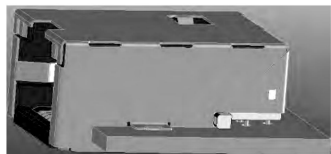

Reference information

Designed In: millimeters
Packaging : tray

CATALOG DRAWING(FOR REFERENCE ONLY) PART No.: MR-TS-50027-14

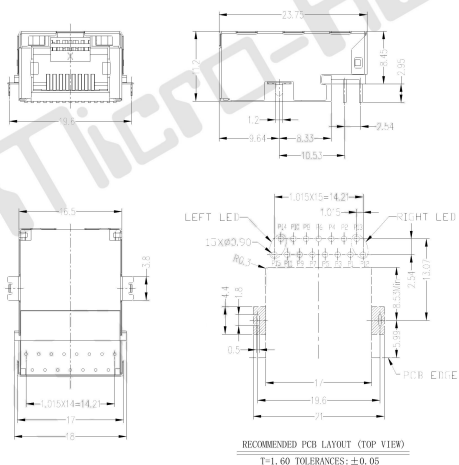

ORDERING INFORMATION AND APPLICATION

