


REV	ECRN	DATE
1	NEW PRODUCTION	20200415

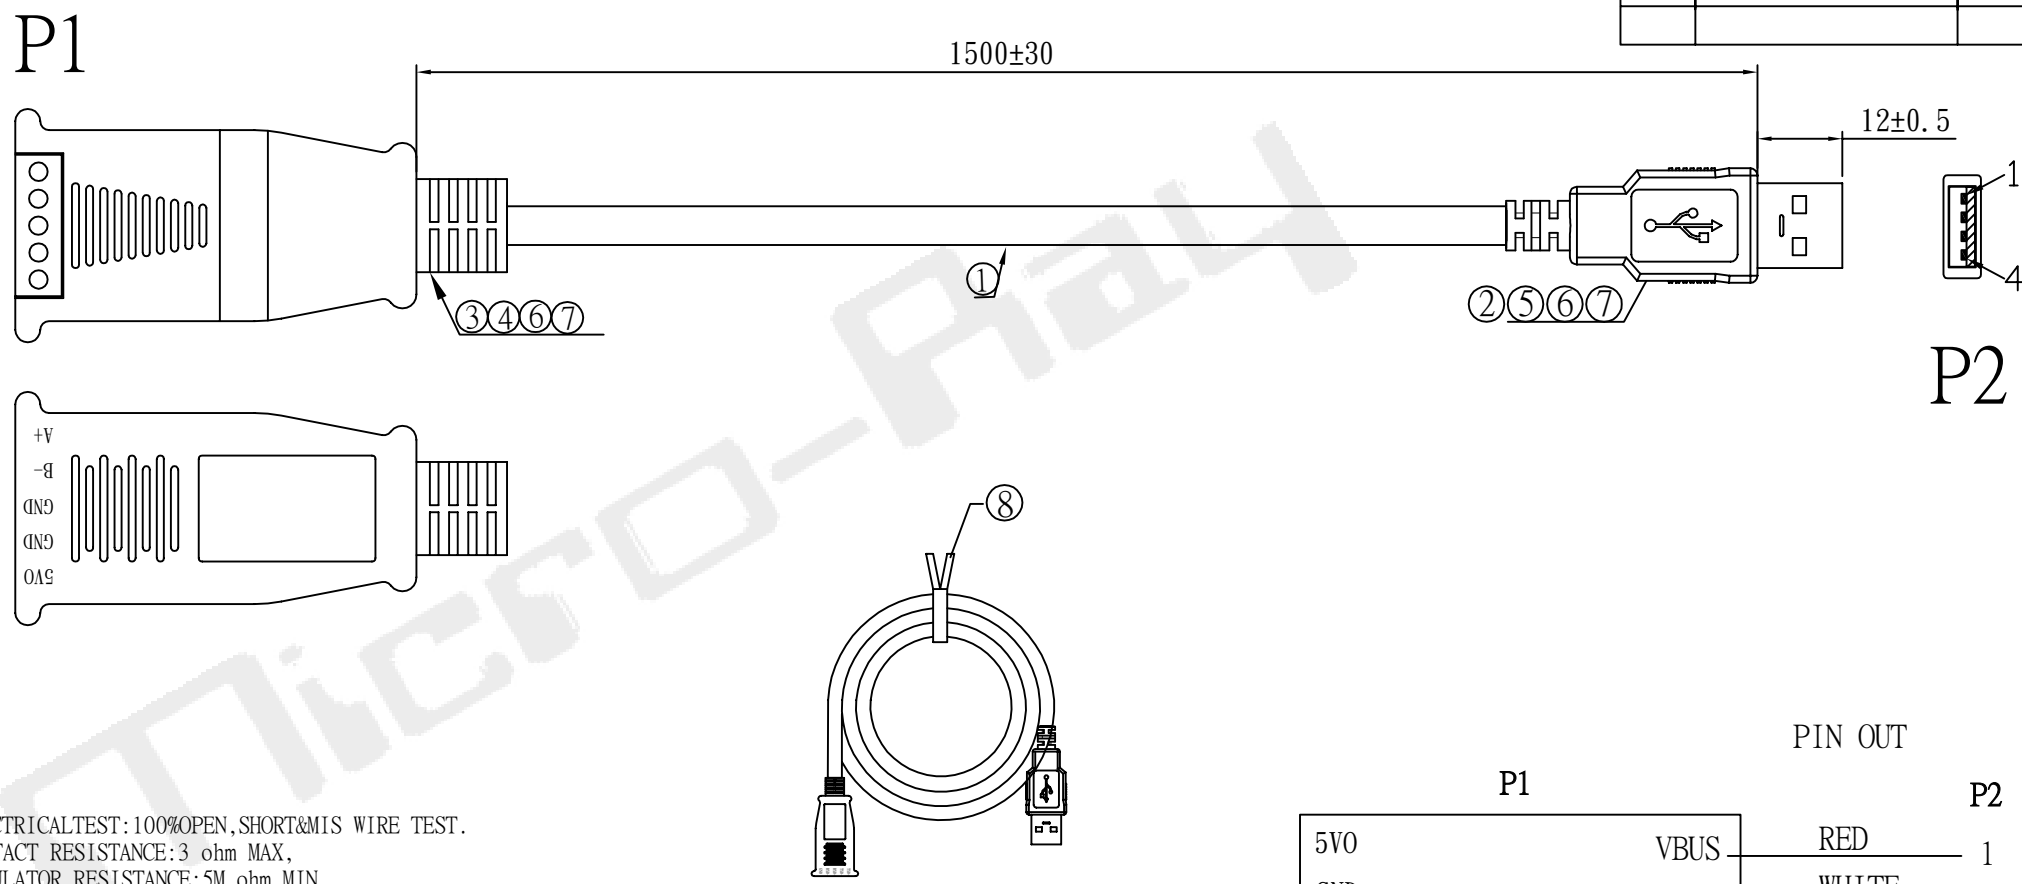


NOTES:
1.ELECTRICALTEST:100%OPEN,SHORT&MIS WIRE TEST.
2.CONTACT RESISTANCE:3 ohm MAX,
3.INSULATOR RESISTANCE:5M ohm MIN.
4.HIGH VOLTAGE:DC 300V 0.01sec.
5.MUST BE ROHS COMPLIANT.

PIN OUT

P1		P2	
5V0	VBUS	RED	1
GND	D-	WHITE	2
GND	D+	GREEN	3
B-	GND	BLACK	4
A+	SHELL		SHELL

⑧	I0002	TIE	MINI TIE COLOR:BLACK	1	PCS
⑦	J0007	TIN WIRE	OD:0.8MM	2.5	G
⑥	C0002	MOLDING	PVC 45P BLACK	4.6	G
⑤	C0001	MOLDING	PE	3.5	G
④	B0744	SHELL	PCB ABS SHELL BLACK	1	SET
③	J0400	CONNECTOR	3.81 TERMINAL BLOCKS+RS485 PCB(CP2102+SP3485E+74HC14D)	1	SET
②	B0009 B0010 B0011	CONNECTOR	USB A/M PIN GODED SHELL PLATED NICKEL PLASTIC:WHITE	1	SET
①	A0091	CABLE	UL2725 28AWG(7/0.12TC)*1P(WHITE, GREEN)+24AWG(11/0.16TC)*2C(RED, BLACK)+AL+B(64/0.1CCS) OD:4.5MM±0.1MM JACKET: PVC 60P BLACK L=1520MM	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	Q'TY	UNIT

RoHS COMPLIANT			Micro-Ray			
			SCALE FREE	USB TO RS485		
DRAWN BY		20240706	UNITS mm	SUPPLIER`S ITEM: 9.00ACCA4355.000R		
CHECKED BY				CUSTOMER: Micro-Ray Electronics, Inc.		
APPROVED BY				PART NUMBER: MR-USB-485-422-WE		
				DRAWING NO. ACCA-4355	DATE	2024.07.16