
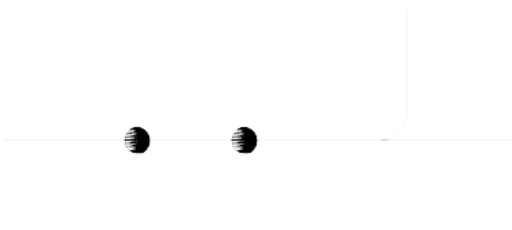


DKES1.5N3

DIN Rail Terminal Blocks > Screw Connection

Date:2026-09-11

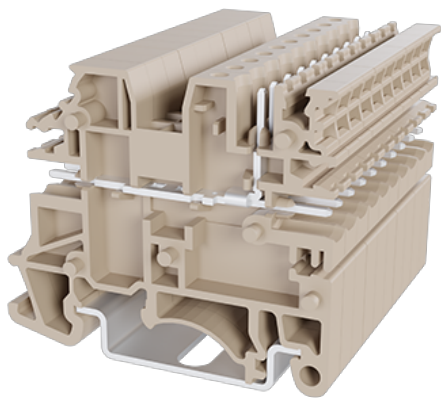

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.
The final product is made according to engineering drawing.

Product Description

300V, 15A, Beige (default)

General information

Short description	Plug-in Connection Terminal Block
Category	Plug-in Connection Terminal Block
Color	Beige (default)
Connection method	Screw Connection
Type of locking	Rail mounting
Length (mm)	50.6
Width (mm)	5.08
Height (mm)	42.5
Number of positions	□1P
Level	Single level
Connection points	3

Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0

Insulation resistance	□500MΩ at DC 500V
Plating of conductor surface	Tin PLATED


Connection data-IEC

Rated voltage (V)	250
Rated current (A)	24
Rated voltage (III/3)(V)	250
Rated impulse voltage (II/2)(KV)	24
Mounting rail	TS-35N/TS-35/15N
End cover plate required	YES
Grounding connections	NO

Connection data-UL

Rated voltage (UL/CUL Group B)(V)	300
Rated current (UL/CUL Group B)(A)	15
Rated voltage (UL/CUL Group C)(V)	300
Rated current (UL/CUL Group C)(A)	15

Drawings

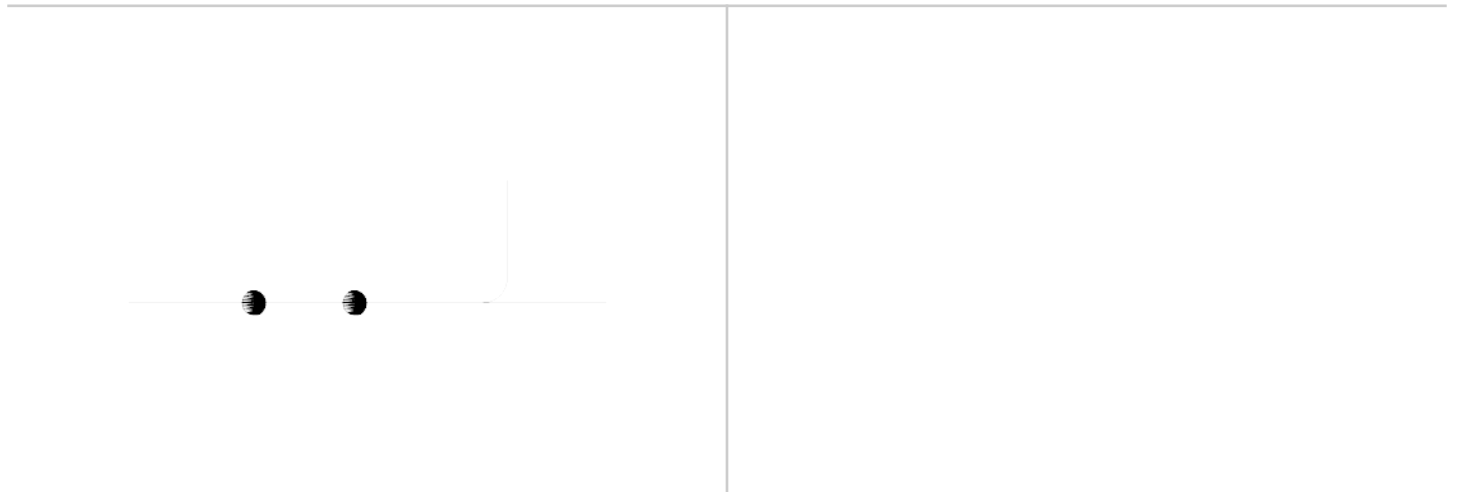

Approvals



