
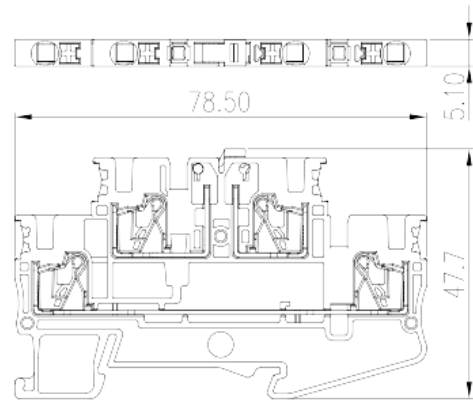


# DPP2.5N-TG

DIN Rail Terminal Blocks &gt; Push-in Design

Date:2026-09-11

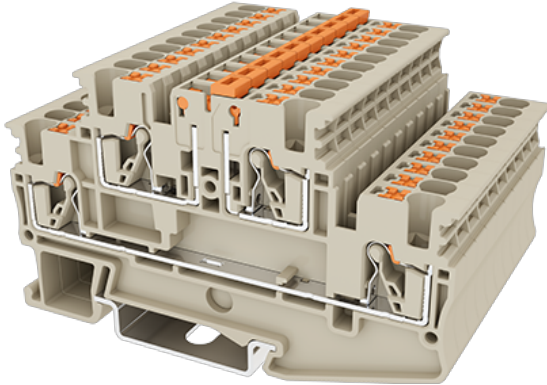

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Product Description

300V, Upper : 18A / Lower : 20A, Beige (default)

## General information

|                     |                                                    |
|---------------------|----------------------------------------------------|
| Short description   | Bi-level Disconnect Terminal Block, Push-in Design |
| Category            | Bi-level Disconnect Terminal Block                 |
| Color               | Beige (default)                                    |
| Connection method   | Push-in Design                                     |
| Type of locking     | Rail Mounting                                      |
| Length (mm)         | 78.5                                               |
| Width (mm)          | 5.1                                                |
| Height (mm)         | 47.7                                               |
| Number of positions | ≥2P                                                |
| Level               | Double level                                       |
| Connection points   | 4                                                  |

## Material information

|                                              |    |
|----------------------------------------------|----|
| Insulation material                          | PA |
| Insulation material group                    | I  |
| Flame retardant rating , compliant with UL94 | V0 |

|                       |                                     |
|-----------------------|-------------------------------------|
| Insulation resistance | $\geq 500\text{M}\Omega$ at DC 500V |
|-----------------------|-------------------------------------|

## Connection data-IEC

|                                                                                                         |         |
|---------------------------------------------------------------------------------------------------------|---------|
| Rated voltage (V)                                                                                       | 400     |
| Rated current (A)                                                                                       | 20      |
| Rated voltage (III/3)(V)                                                                                | 400     |
| Rated impulse voltage (III/3)(KV)                                                                       | 6       |
| Conductor cross section solid. min (mm <sup>2</sup> )                                                   | 0.2     |
| Conductor cross section solid.max (mm <sup>2</sup> )                                                    | 4       |
| Conductor cross section stranded. min (mm <sup>2</sup> )                                                | 0.2     |
| Conductor cross section stranded. max (mm <sup>2</sup> )                                                | 2.5     |
| Conductor cross section flexible, with min ferrule without plastic sleeve (mm <sup>2</sup> )            | 0.25    |
| Conductor cross section flexible, with max ferrule without plastic sleeve (mm <sup>2</sup> )            | 2.5     |
| Conductor cross section flexible, with min ferrule with plastic sleeve (mm <sup>2</sup> )               | 0.25    |
| Conductor cross section flexible, with max ferrule with plastic sleeve (mm <sup>2</sup> )               | 2.5     |
| 2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm <sup>2</sup> ) | 0.5     |
| 2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm <sup>2</sup> ) | 0.5     |
| Slotted screwdriver size (Blade thickness x Width)(mm)                                                  | 0.6x3.5 |
| Stripping Length (mm)                                                                                   | 10      |
| Mounting rail                                                                                           | TS-35   |
| End cover plate required                                                                                | YES     |
| Grounding connections                                                                                   | NO      |

## Connection data-UL

|                                                  |                           |
|--------------------------------------------------|---------------------------|
| Rated voltage (UL/CUL Group B)(V)                | 300                       |
| Rated current (UL/CUL Group B)(A)                | Upper : 18A / Lower : 20A |
| Rated voltage (UL/CUL Group C)(V)                | 300                       |
| Rated current (UL/CUL Group C)(A)                | Upper : 18A / Lower : 20A |
| Min. solid wire connection (AWG) acc. to UL/CUL  | 26                        |
| Max. solid wire connection AWG acc. to UL/CUL    | 12                        |
| Min. stranded wire connection AWG acc. to UL/CUL | 26                        |
| Max. stranded wire connection AWG acc. to UL/CUL | 12                        |

## Environment & Safety

|                                         |     |
|-----------------------------------------|-----|
| Back of the hand protection (YES or NO) | YES |
| Finger protection (YES or NO)           | YES |
| Operating temperature. max (°C)         | 120 |
| Operating temperature. min (°C)         | -40 |


## UL Recognized

|                            |                         |
|----------------------------|-------------------------|
| Wire Range (Group B)(AWG)  | 26~12                   |
| Rated voltage (Group B)(V) | 300                     |
| Rated current (Group B)(A) | 18A (Up) / 20A (Bottom) |
| Wire Range (Group C)(AWG)  | 26~12                   |
| Rated voltage (Group C)(V) | 300                     |
| Rated current (Group C)(A) | 18A (Up) / 20A (Bottom) |

## CUL Recognized

|                            |                         |
|----------------------------|-------------------------|
| Wire Range (Group B)(AWG)  | 26~12                   |
| Rated voltage (Group B)(V) | 300                     |
| Rated current (Group B)(A) | 18A (Up) / 20A (Bottom) |
| Wire Range (Group C)(AWG)  | 26~12                   |
| Rated voltage (Group C)(V) | 300                     |
| Rated current (Group C)(A) | 18A (Up) / 20A (Bottom) |

## Drawings

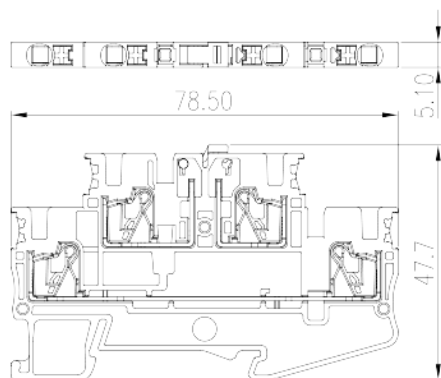

## Approvals

