
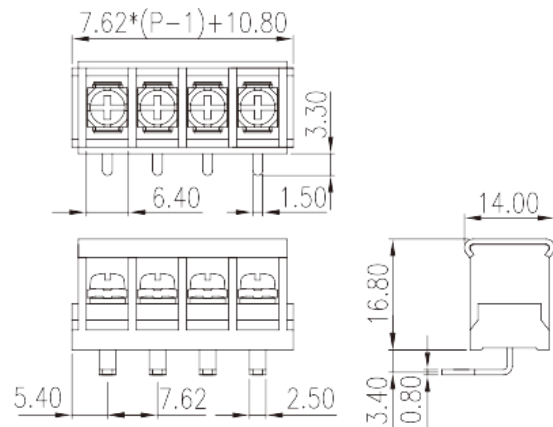


# DT-2G-B14W-XX

Barrier Terminal Blocks &gt; Single Row

Date:2026-09-11Version:1.1

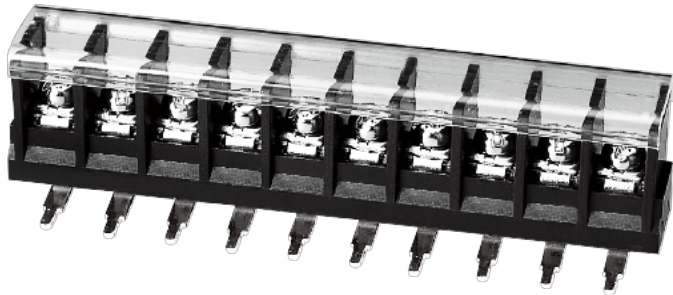

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Product Description

Pitch: 7.62mm , M3, 300V, 15A

## General information

|                                        |                                            |
|----------------------------------------|--------------------------------------------|
| Short description                      | Barrier terminal blocks , Screw connection |
| Category                               | Single Row                                 |
| Pitch (mm)                             | 7.62                                       |
| Color                                  | Black(default)                             |
| Connection method                      | Screw connection                           |
| Type of locking                        | Without                                    |
| Pin demensions (Thickness x Width)(mm) | 0.8X1.5                                    |
| PCB hole diameter (mm)                 | 1.8~1.9                                    |
| Level                                  | Single Row                                 |

## Material information

|                                              |              |
|----------------------------------------------|--------------|
| Insulation material                          | PBT          |
| Insulation material group                    | IIIa         |
| Flame retardant rating , compliant with UL94 | V0           |
| Conductor material                           | Copper Alloy |
| Plating of conductor surface                 | Tinned       |

## Connection data-IEC

|                                                                        |         |
|------------------------------------------------------------------------|---------|
| Rated voltage (V)                                                      | 630     |
| Rated current (A)                                                      | 24      |
| Rated voltage (II/2)(V)                                                | 630     |
| Rated voltage (III/2) (V)                                              | 630     |
| Rated voltage (III/3)(V)                                               | 400     |
| Rated impulse voltage (II/2)(KV)                                       | 6       |
| Rated impulse voltage (III/2)(KV)                                      | 6       |
| Rated impulse voltage (III/3)(KV)                                      | 6       |
| Conductor cross section solid. min (mm <sup>2</sup> )                  | 0.2     |
| Conductor cross section solid.max (mm <sup>2</sup> )                   | 2.5     |
| Conductor cross section stranded. min (mm <sup>2</sup> )               | 0.2     |
| Conductor cross section stranded. max (mm <sup>2</sup> )               | 2.5     |
| 2 conductors with same cross section, solid, max (mm <sup>2</sup> )    | 1.5     |
| 2 conductors with same cross section, stranded, max (mm <sup>2</sup> ) | 1.5     |
| Screw thread                                                           | M3      |
| Slotted screwdriver size (Blade thickness x Width)(mm)                 | 0.8x4.0 |
| Philips screwdriver size                                               | PH2     |
| Rated torque (N.m)                                                     | 0.8     |
| Recommend tightening torque. min (N.m)                                 | 0.5     |
| Recommend tightening torque. max (N.m)                                 | 0.8     |
| Stripping Length (mm)                                                  | 7~8     |

## Connection data-UL

|                                                  |     |
|--------------------------------------------------|-----|
| Rated voltage (UL/CUL Group B)(V)                | 300 |
| Rated current (UL/CUL Group B)(A)                | 15  |
| Rated voltage (UL/CUL Group C)(V)                | 150 |
| Rated current (UL/CUL Group C)(A)                | 15  |
| Rated voltage (UL/CUL Group D)(V)                | 300 |
| Rated current (UL/CUL Group D)(A)                | 10  |
| Min. solid wire connection (AWG) acc. to UL/CUL  | 22  |
| Max. solid wire connection AWG acc. to UL/CUL    | 14  |
| Min. stranded wire connection AWG acc. to UL/CUL | 22  |
| Max. stranded wire connection AWG acc. to UL/CUL | 14  |

## Environment & Safety

|                                         |     |
|-----------------------------------------|-----|
| Back of the hand protection (YES or NO) | YES |
| Operating temperature. max (°C)         | 120 |
| Operating temperature. min (°C)         | -40 |

## UL Recognized

|                            |       |
|----------------------------|-------|
| Wire Range (Group B)(AWG)  | 22~14 |
| Rated voltage (Group B)(V) | 300   |
| Rated current (Group B)(A) | 15    |
| Wire Range (Group C)(AWG)  | 22~14 |
| Rated voltage (Group C)(V) | 150   |
| Rated current (Group C)(A) | 15    |
| Wire Range (Group D)(AWG)  | 22~14 |
| Rated voltage (Group D)(V) | 300   |
| Rated current (Group D)(A) | 10    |

## CUL Recognized


|                            |       |
|----------------------------|-------|
| Wire Range (Group B)(AWG)  | 22~14 |
| Rated voltage (Group B)(V) | 300   |
| Rated current (Group B)(A) | 15    |
| Wire Range (Group C)(AWG)  | 22~14 |
| Rated voltage (Group C)(V) | 150   |
| Rated current (Group C)(A) | 15    |
| Wire Range (Group D)(AWG)  | 22~14 |
| Rated voltage (Group D)(V) | 300   |
| Rated current (Group D)(A) | 10    |

## VDE Approval

|                               |         |
|-------------------------------|---------|
| Wire Range (mm <sup>2</sup> ) | 0.2~2.5 |
| Rated voltage (V)             | 630     |
| Rated current (A)             | 24      |

## Drawings

|  |  |
|--|--|
|  |  |
|--|--|

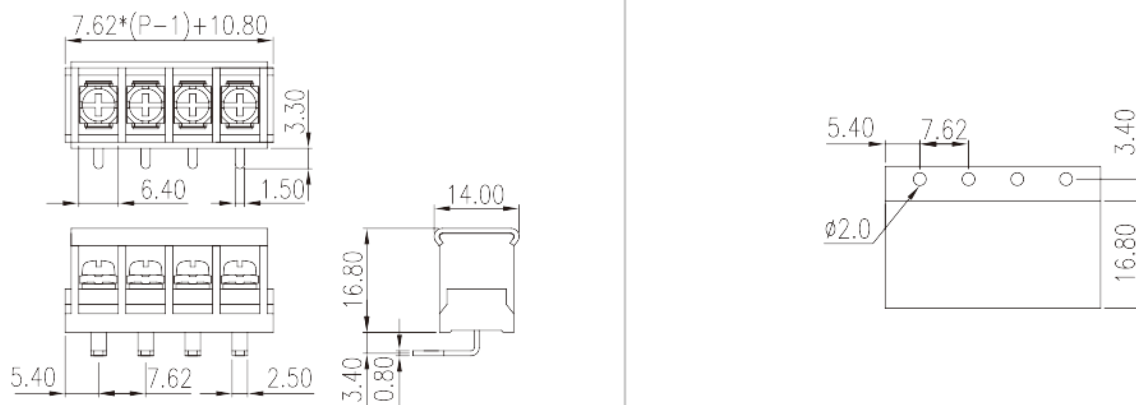

## Approvals

