





MR-C4501 Series 4.50mm Pitch Series Wire to Wire Connectors

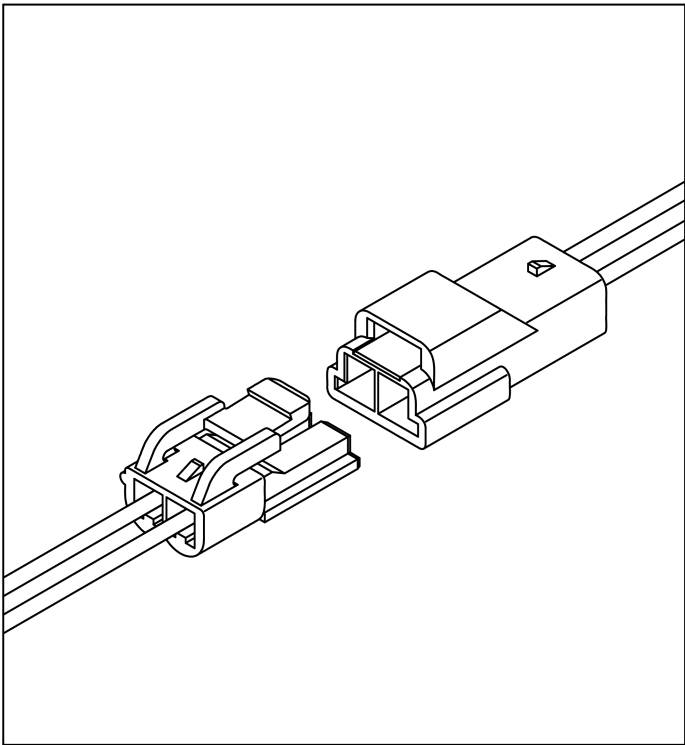


SPECIFICATIONS:

Voltage Rating: 300V AC/DC
Current Rating: 10A AC/DC
Withstanding Voltage: 1500V AC/Minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Applicable Wire Range: AWG#16~24.

Assembly Layout:

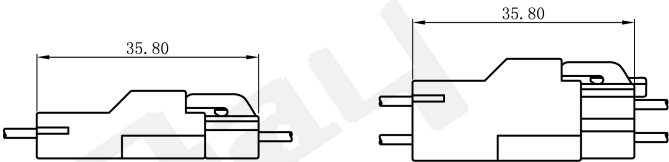

MR-C4501HF-XNP-NOWH 4.50mm Pitch Single/Dual Row Housing

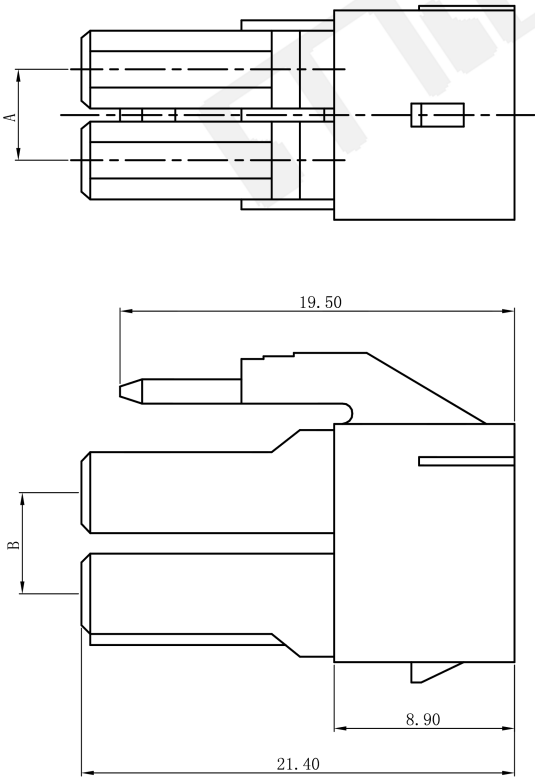

Reference Information:

- *Material:
 - Housing: PA66 UL94V-0 / White
- *Suitable MR-C4501 series Terminal
- *Mates with MR-C4501 Male Housing




Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
02	4.50	0	6.00	10.30
03	9.00	0	6.00	14.80
2*2P	4.50	4.70	11.80	10.30
2*3P	9.00	4.70	11.80	14.80
2*4P	13.50	4.70	11.80	19.30
3*3P	9.00	11.00	17.00	14.80
3*4P	13.50	11.00	17.00	19.30
3*5P	18.00	11.00	17.00	23.80



MR-C4501 Series 4.50mm Pitch Series Wire to Wire Connectors





MR-C4501HM-XNP-NOWH 4.50mm Pitch Single/Dual Row Housing

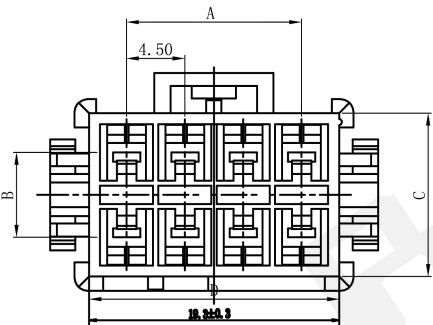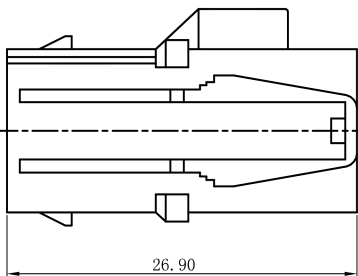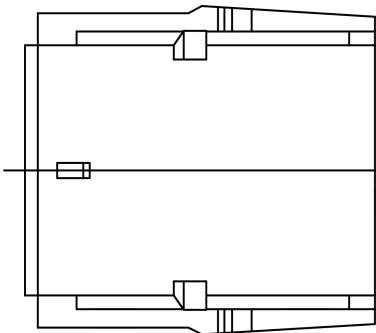

Reference Information:
*Material:
Housing: PA66 UL94V-0 / White
*Suitable MR-C4501 series Terminal
*Mates with MR-C4501 Female Housing
Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
02	4.50	0	6.70	10.30
03	9.00	0	6.70	14.80
2*2P	4.50	4.70	12.50	10.30
2*3P	9.00	4.70	12.50	14.80
2*4P	13.50	4.70	12.50	19.30
3*3P	9.00	11.00	17.80	14.80
3*4P	13.50	11.00	17.80	19.30
3*5P	18.00	11.00	17.80	23.80

MR-C4501TF-PT1 4.50mm Pitch Terminal

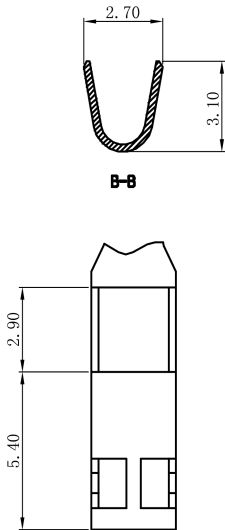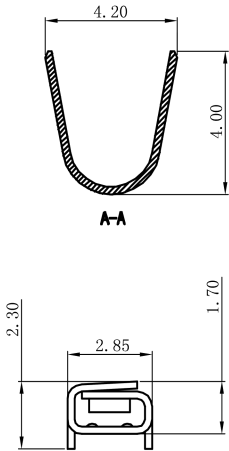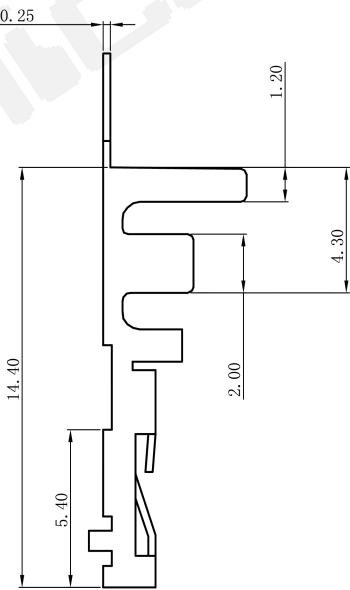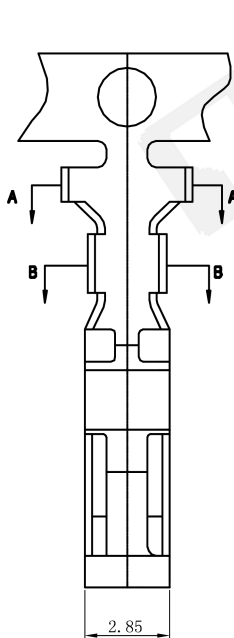

Reference Information:
*Material: Phosphor Bronze / Tin-plated
*Mates with MR-C4501 series Housing

Ordering Information & Specifications


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MR-C4501TF-PT1	AWG#16-#24	2.70mm(max)	Phosphor Bronze	Tin-plated	4,500pcs



MR-C4501 Series 4.50mm Pitch Series Wire to Wire Connectors

MR-C4501TM-PT1

4.14mm Pitch Terminal

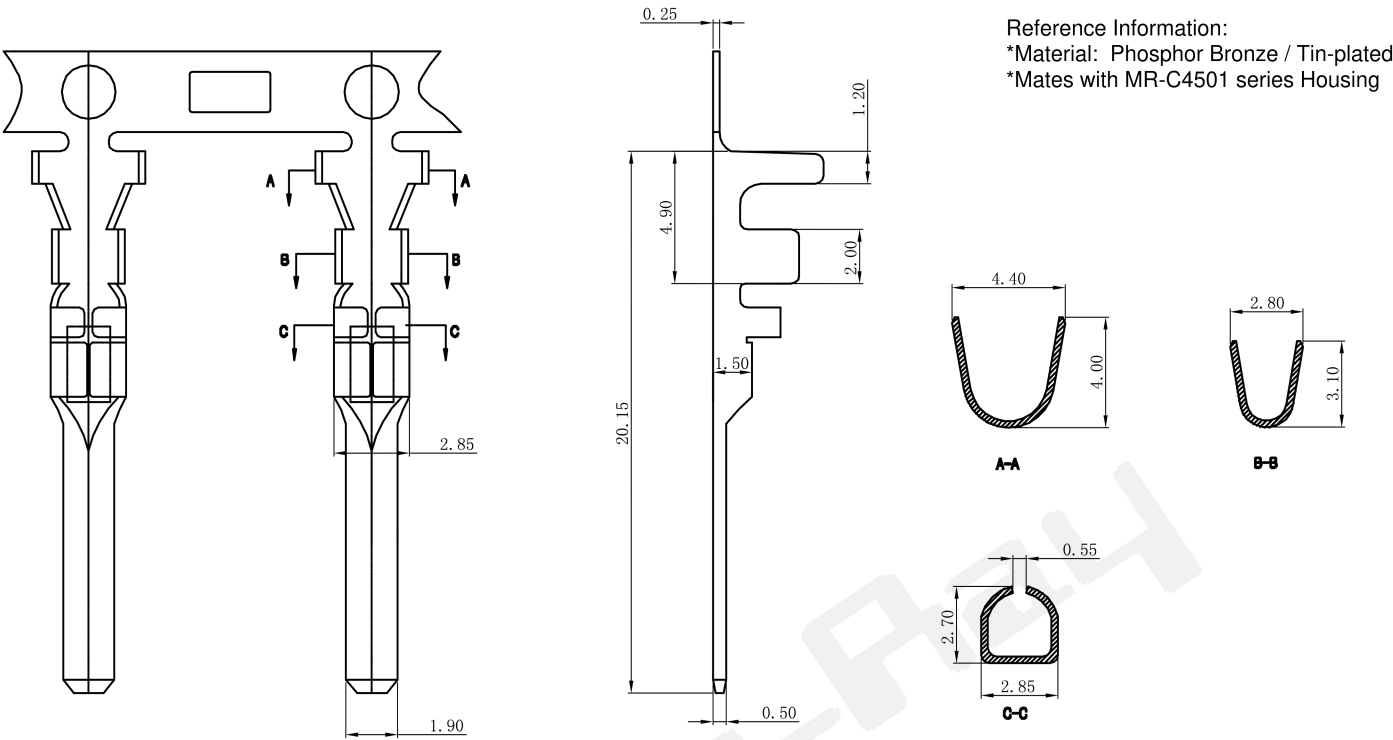

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
MR-C4501TM-PT1	AWG#16-#24	2.70mm(max)	Phosphor Bronze	Tin-plated	4,500pcs